


# Department of Defense

## Joint Technical Architecture

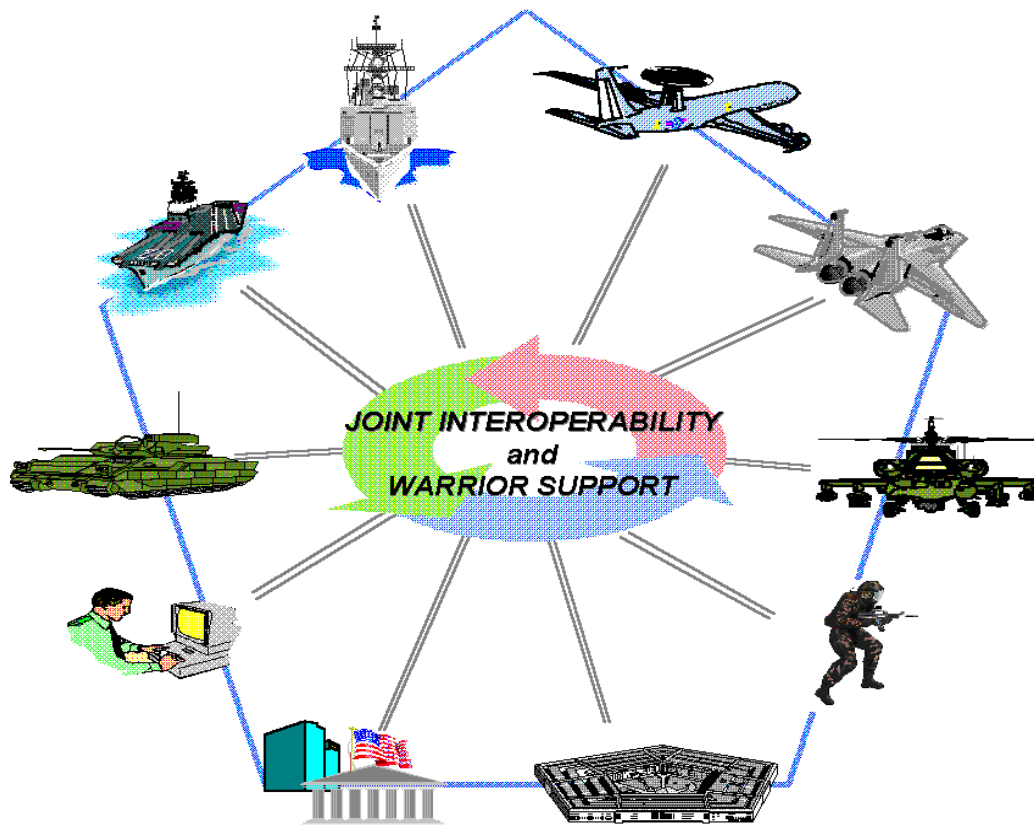

**Version 3.0**  
**15 November 1999**

Page intentionally left blank.

## Executive Summary

Effective military operations must respond with a mix of forces, anywhere in the world, at a moment's notice. The ability for the information technology systems supporting these operations to interoperate—work together and exchange information—is critical to their success. The lessons learned from conflicts like Desert Shield/Desert Storm resulted in a new vision for the Department of Defense (DoD). Joint Vision 2010 (JV 2010) is the conceptual template for how America's Armed Forces will channel the vitality and innovation of their people, and leverage technological opportunities to achieve new levels of effectiveness in joint warfighting. The DoD Joint Technical Architecture (JTA) is crucial to achieving JV 2010.

The JTA provides DoD systems with the basis for the needed seamless interoperability. The JTA defines the service areas, interfaces, and standards (JTA elements) applicable to all DoD systems, and its adoption is mandated for the management, development, and acquisition of new or improved systems throughout DoD. The JTA is structured into service areas based on the DoD Technical Reference Model (TRM). The DoD TRM originated from the Technical Architecture Framework for Information Management (TAFIM) and was developed to show which interfaces and content needed to be identified. These are depicted as major service areas in the DoD TRM.

Standards and guidelines in the JTA are stable, technically mature, and publicly available. Wherever possible, they are commercially supported, and validated commercial off-the-shelf (COTS) implementations from multiple vendors are available. Standards and guidelines that do not yet meet these criteria, but are expected to mature to meet them in the near-term (within 3 years), are cited as “emerging standards” in the expectation that they will be mandated in future versions of the JTA.

The JTA consists of two main parts: the JTA Core, and the JTA annexes. The JTA Core contains the minimum set of JTA elements applicable to all DoD systems to support interoperability. The JTA annexes contain additional JTA elements applicable to specific functional domains (families of systems). These elements are needed to ensure interoperability of systems within each domain but may be inappropriate for systems in other domains. The current version of the JTA includes annexes for the Command, Control, Communications, Computers, Intelligence, Surveillance, and Reconnaissance (C4ISR) domain; the Combat Support domain; the Modeling and Simulation domain; and the Weapon Systems domain. Where subsets of an application domain (subdomain) have special interoperability requirements, the JTA includes subdomain annexes containing JTA elements applicable to systems within that subdomain. The intention is that a system within a specific subdomain adopt the JTA elements contained in the relevant subdomain annex, the JTA elements contained in the parent domain annex, and the JTA elements contained in the JTA Core.

The JTA is complementary to, and consistent with, other DoD programs and initiatives aimed at the development and acquisition of effective, interoperable information systems. These include DoD's Specification and Standards Reform; Implementation of the Information Technology Management Reform Act (ITMRA); Defense Modeling and Simulation Initiative; Evolution of the DoD TRM; Defense Information Infrastructure Common Operating Environment (DII COE); and Open Systems Initiative.

Development of the JTA is a collaborative effort, conducted by the JTA Development Group (JTADG), directed by the Technical Architecture Steering Group (TASG), and approved by the Architecture Coordination Council (ACC). Members represent the DoD Components (Office of the Secretary of Defense [OSD], the Military Departments, the Office of the Joint Chiefs of Staff [OJCS], the Unified and Specified Combatant Commands, and the Defense Agencies) and components of the Intelligence Community.

The JTA is a living document and will continue to evolve with the technologies, marketplace, and associated standards upon which it is based.

# Table of Contents

<b>Executive Summary .....</b>	<b>i</b>
<b>Table of Contents .....</b>	<b>iii</b>
<b>List of Figures .....</b>	<b>xix</b>
<b>List of Tables .....</b>	<b>xxi</b>
<b>Section 1: JTA Overview.....</b>	<b>1</b>
1.1 Introduction to the Joint Technical Architecture .....	2
1.1.1 Purpose .....	2
1.1.2 Scope .....	2
1.1.3 Applicability .....	3
1.1.4 Background .....	3
1.1.5 Architectures Defined.....	4
1.1.5.1 Operational Architecture View .....	5
1.1.5.2 Technical Architecture View.....	5
1.1.5.3 Systems Architecture View .....	6
1.1.5.4 Relationship Between the C4ISR Architecture Framework 2.0 and the DoD JTA.....	6
1.2 Document Organization.....	6
1.2.1 General Organization .....	6
1.2.2 Information-Technology Standards .....	7
1.2.3 Domain and Subdomain Annexes.....	7
1.2.4 Appendices (Appendix A, B, C, D, E, F).....	9
1.3 Key Considerations in Using the JTA.....	10
1.4 Element Normalization Rules .....	10
1.5 JTA Relationship to DoD Standards Reform.....	11
1.6 Standards Selection Criteria.....	11
1.7 Configuration Management.....	12
<b>Section 2.1: Information-Technology Standards.....</b>	<b>15</b>
2.1.1 General.....	15
2.1.1.1 Purpose.....	15
2.1.1.2 Scope .....	15
2.1.2 Background .....	15
2.1.2.1 DoD Technical Reference Model (DoD TRM).....	15
2.1.2.2 Policy Mandates.....	17
2.1.2.2.1 Year 2000 Compliance .....	17
2.1.2.2.2 Defense Information Infrastructure Common Operating Environment.....	18
2.1.3 Organization of Section 2 .....	19
<b>Section 2.2: Information-Processing Standards .....</b>	<b>21</b>
2.2.1 Introduction.....	21
2.2.1.1 Purpose.....	21
2.2.1.2 Scope .....	21
2.2.1.3 Background.....	21
2.2.2 Mandated Standards .....	21
2.2.2.1 Application Software Entity .....	21
2.2.2.2 Application Platform Entity .....	22
2.2.2.2.1 Service Areas .....	22
2.2.2.2.1.1 Software-Engineering Services .....	22
2.2.2.2.1.2 User Interface Services .....	22
2.2.2.2.1.3 Data Management Services .....	23
2.2.2.2.1.4 Data Interchange Services .....	24

2.2.2.2.1.4.1 Document Interchange.....	24
2.2.2.2.1.4.2 Graphics Data Interchange .....	25
2.2.2.2.1.4.3 Geospatial Data Interchange .....	26
2.2.2.2.1.4.4 Still-Imagery Data Interchange.....	27
2.2.2.2.1.4.5 Motion-Imagery Data Interchange.....	27
2.2.2.2.1.4.5.1 Video Systems .....	27
2.2.2.2.1.4.5.1.1 Video Imagery .....	28
2.2.2.2.1.4.5.1.2 Video Teleconference.....	30
2.2.2.2.1.4.5.1.3 Video Telemedicine .....	30
2.2.2.2.1.4.5.1.4 Video Support.....	30
2.2.2.2.1.4.6 Audio Data Interchange .....	31
2.2.2.2.1.4.6.1 Audio Associated with Video.....	31
2.2.2.2.1.4.6.1.1 Audio for Video Imagery.....	31
2.2.2.2.1.4.6.1.2 Audio for Video Teleconference .....	32
2.2.2.2.1.4.6.1.3 Audio for Video Telemedicine.....	32
2.2.2.2.1.4.6.1.4 Audio for Video Support .....	32
2.2.2.2.1.4.6.2 Audio Not Associated with Video Systems .....	32
2.2.2.2.1.4.7 Data Interchange Storage Media .....	32
2.2.2.2.1.4.8 Atmospheric and Oceanographic Data Interchange .....	32
2.2.2.2.1.4.9 Time-of-Day Data Interchange.....	33
2.2.2.2.1.5 Graphic Services .....	33
2.2.2.2.1.6 Communications Services .....	34
2.2.2.2.1.7 Operating-System Services.....	34
2.2.2.2.1.8 Internationalization Services.....	35
2.2.2.2.1.9 Security Services.....	35
2.2.2.2.1.10 System Management Services.....	35
2.2.2.2.1.11 Distributed-Computing Services .....	35
2.2.2.2.1.11.1 Remote-Procedure Computing .....	36
2.2.2.2.1.11.2 Distributed-Object Computing.....	36
2.2.3 Emerging Standards.....	37
2.2.3.1 Data Management .....	37
2.2.3.2 Data Interchange .....	38
2.2.3.2.1 Document Interchange .....	38
2.2.3.2.2 Graphics Data Interchange.....	39
2.2.3.2.2.1 Virtual Reality Modeling Language.....	39
2.2.3.2.3 Geospatial Data Interchange .....	39
2.2.3.2.4 Still-Imagery Data Interchange .....	39
2.2.3.2.5 Motion-Imagery Data Interchange .....	40
2.2.3.2.5.1 Video Systems.....	40
2.2.3.2.5.1.1 Video Imagery.....	40
2.2.3.2.5.1.2 Video Teleconference .....	40
2.2.3.2.6 Multimedia Data Interchange.....	40
2.2.3.3 Binary Floating-Data Interchange .....	40
2.2.3.4 Operating Systems .....	41
2.2.3.4.1 POSIX.....	41
2.2.3.4.2 Virtual Machines .....	41
2.2.3.5 Distributed Computing Services.....	42
2.2.3.5.1 Remote-Procedure Computing .....	42
2.2.3.5.2 Distributed-Object Computing.....	42
2.2.3.6 Support Application Services .....	42
2.2.3.6.1 Environment Management.....	42
2.2.3.6.2 Learning Technology .....	43
<b>Section 2.3: Information-Transfer Standards .....</b>	<b>45</b>
2.3.1 Introduction.....	45
2.3.1.1 Purpose.....	45
2.3.1.2 Scope .....	45
2.3.1.3 Background.....	45

2.3.2	Mandated Standards .....	45
2.3.2.1	End-System Standards .....	45
2.3.2.1.1	Host Standards .....	46
2.3.2.1.1.1	Application-Support Services .....	46
2.3.2.1.1.1.1	Electronic Mail .....	46
2.3.2.1.1.1.2	Directory Services .....	46
2.3.2.1.1.1.2.1	X.500 Directory Services .....	46
2.3.2.1.1.1.2.2	Lightweight Directory Access Protocol .....	47
2.3.2.1.1.1.2.3	Domain Name System .....	47
2.3.2.1.1.1.3	File Transfer .....	47
2.3.2.1.1.1.4	Remote Terminal .....	47
2.3.2.1.1.1.5	Network Time Synchronization .....	47
2.3.2.1.1.1.6	Bootstrap Protocol .....	48
2.3.2.1.1.1.7	Configuration Information Transfer .....	48
2.3.2.1.1.1.8	Web Services .....	48
2.3.2.1.1.1.8.1	Hypertext Transfer Protocol .....	48
2.3.2.1.1.1.8.2	Uniform Resource Locator .....	48
2.3.2.1.1.1.9	Connectionless Data Transfer .....	48
2.3.2.1.1.2	Transport Services .....	48
2.3.2.1.1.2.1	Transmission Control Protocol/User Datagram Protocol Over Internet Protocol .....	49
2.3.2.1.1.2.1.1	Transmission Control Protocol .....	49
2.3.2.1.1.2.1.2	User Datagram Protocol .....	49
2.3.2.1.1.2.1.3	Internet Protocol .....	49
2.3.2.1.1.2.2	Open-Systems Interconnection Transport Over IP-based Networks .....	49
2.3.2.1.2	Video Teleconferencing Standards .....	50
2.3.2.1.3	Facsimile Standards .....	52
2.3.2.1.3.1	Analog Facsimile Standards .....	52
2.3.2.1.3.2	Digital Facsimile Standards .....	52
2.3.2.1.4	Imagery Dissemination Communications Standards .....	52
2.3.2.1.5	Global Positioning System .....	52
2.3.2.2	Network Standards .....	53
2.3.2.2.1	Internetworking (Router) Standards .....	53
2.3.2.2.1.1	Internet Protocol .....	54
2.3.2.2.1.2	Internet Protocol Routing .....	54
2.3.2.2.1.2.1	Interior Routers .....	54
2.3.2.2.1.2.2	Exterior Routers .....	54
2.3.2.2.2	Subnetworks .....	54
2.3.2.2.2.1	Local Area Network Access .....	54
2.3.2.2.2.2	Point-to-Point Standards .....	55
2.3.2.2.2.3	Combat Net Radio Networking .....	55
2.3.2.2.2.4	Integrated Services Digital Network .....	56
2.3.2.2.2.5	Asynchronous-Transfer Mode .....	57
2.3.2.3	Transmission Media .....	59
2.3.2.3.1	Military Satellite Communications .....	59
2.3.2.3.1.1	Ultra High Frequency Satellite Terminal Standards .....	59
2.3.2.3.1.1.1	5-KHz and 25-KHz Service .....	59
2.3.2.3.1.1.2	5-KHz Demand Assigned Multiple Access Service .....	59
2.3.2.3.1.1.3	25-KHz Time Division Multiple Access/Demand Assigned Multiple Access Service .....	59
2.3.2.3.1.1.4	Data Control Waveform .....	59
2.3.2.3.1.1.5	Demand Assigned Multiple Access Control System .....	60
2.3.2.3.1.2	Super High Frequency Satellite Terminal Standards .....	60
2.3.2.3.1.2.1	Earth Terminals .....	60
2.3.2.3.1.2.2	Phase-Shift Keying Modems .....	60
2.3.2.3.1.3	Extremely High Frequency Satellite Payload and Terminal Standards .....	60
2.3.2.3.1.3.1	Low Data Rate .....	60
2.3.2.3.1.3.2	Medium Data Rate (MDR) .....	60
2.3.2.3.2	Radio Communications .....	61

2.3.2.3.2.1 Low Frequency and Very Low Frequency .....	61
2.3.2.3.2.2 High Frequency .....	61
2.3.2.3.2.2.1 High Frequency and Automatic Link Establishment.....	61
2.3.2.3.2.2.2 Anti-Jamming Capability .....	61
2.3.2.3.2.2.3 Data Modems .....	61
2.3.2.3.2.3 Very High Frequency .....	61
2.3.2.3.2.4 Ultra High Frequency.....	61
2.3.2.3.2.4.1 Ultra High Frequency Radio.....	61
2.3.2.3.2.4.2 Anti-Jamming Capability .....	61
2.3.2.3.2.5 Super High Frequency.....	62
2.3.2.3.2.6 Link 16 Transmission Standards .....	62
2.3.2.3.3 Synchronous Optical Network Transmission Facilities .....	62
2.3.2.4 Network and Systems Management .....	62
2.3.2.4.1 Data Communications Management .....	63
2.3.2.4.2 Telecommunications Management.....	63
2.3.3 Emerging Standards.....	64
2.3.3.1 End-System Standards .....	64
2.3.3.1.1 Internet Standards .....	64
2.3.3.1.2 Video Teleconferencing Standards.....	65
2.3.3.1.3 Space Communication Protocol Standards .....	65
2.3.3.2 Network Standards .....	66
2.3.3.3 Military Satellite Communications .....	68
2.3.3.4 Radio Communications.....	68
2.3.3.5 Network Management.....	68
<b>Section 2.4: Information-Modeling, Metadata, and Information-Exchange Standards .....</b>	<b>71</b>
2.4.1 Introduction.....	71
2.4.1.1 Purpose.....	71
2.4.1.2 Scope .....	71
2.4.1.3 Background.....	71
2.4.2 Mandated Standards .....	72
2.4.2.1 Activity Modeling .....	72
2.4.2.2 Data Modeling.....	73
2.4.2.3 DoD Data Model Implementation.....	73
2.4.2.4 DoD Data Definitions .....	74
2.4.2.4.1 DoD Date Standards.....	74
2.4.2.5 Information-Exchange Standards .....	75
2.4.2.5.1 Information-Exchange Standards Applicability .....	75
2.4.2.5.2 Tactical Information-Exchange Standards .....	75
2.4.2.5.2.1 Bit-Oriented Formatted Messages.....	75
2.4.2.5.2.2 Character-Based Formatted Messages.....	76
2.4.3 Emerging Standards.....	76
2.4.3.1 Object Modeling.....	76
2.4.3.2 DoD Data Definitions .....	77
2.4.3.3 Information-Exchange Standards .....	77
<b>Section 2.5: Human-Computer Interface Standards .....</b>	<b>79</b>
2.5.1 Introduction.....	79
2.5.1.1 Purpose.....	79
2.5.1.2 Scope .....	79
2.5.1.3 Background.....	79
2.5.2 Mandated Standards .....	79
2.5.2.1 General .....	79
2.5.2.1.1 Character-Based Interfaces .....	80
2.5.2.1.2 Graphical User Interface .....	80
2.5.2.2 GUI Style Guides .....	80
2.5.2.2.1 Commercial Style Guides .....	81



2.5.2.2.1.1 X-Window Style Guides .....	81
2.5.2.2.1.2 Windows Style Guide .....	82
2.5.2.2.2 DoD Human-Computer Interface Style Guide .....	82
2.5.2.2.3 Domain-Level Style Guides .....	82
2.5.2.2.4 System-Level Style Guides .....	82
2.5.2.3 Symbology .....	83
2.5.3 Emerging Standards .....	83
<b>Section 2.6: Information-Security Standards .....</b>	<b>85</b>
2.6.1 Introduction .....	85
2.6.1.1 Purpose .....	85
2.6.1.2 Scope .....	85
2.6.1.3 Background .....	85
2.6.2 Mandated Standards .....	86
2.6.2.1 Introduction .....	86
2.6.2.2 Information-Processing Security Standards .....	86
2.6.2.2.1 Application Software Entity Security Standards .....	86
2.6.2.2.2 Application Platform Entity Security Standards .....	87
2.6.2.2.2.1 Data Management Services .....	87
2.6.2.2.2.2 Operating-System Services Security .....	87
2.6.2.2.2.2.1 Security-Auditing and Security-Alarm Reporting Standards .....	87
2.6.2.2.2.2.2 Authentication Security Standards .....	87
2.6.2.3 Information-Transfer Security Standards .....	88
2.6.2.3.1 End-System Security Standards .....	88
2.6.2.3.1.1 Host Security Standards .....	88
2.6.2.3.1.1.1 Security Algorithms .....	88
2.6.2.3.1.1.2 Security Protocols .....	88
2.6.2.3.1.1.3 Evaluation Criteria Security Standards .....	89
2.6.2.3.2 Network Security Standards .....	89
2.6.2.3.3 Transmission Media Security Standards .....	89
2.6.2.4 Information-Modeling, Metadata, and Information-Exchange Security Standards .....	90
2.6.2.5 Human-Computer Interface Security Standards .....	90
2.6.2.6 Web Security Standards .....	90
2.6.3 Emerging Standards .....	90
2.6.3.1 Introduction .....	90
2.6.3.2 Information-Processing Security Standards .....	90
2.6.3.2.1 Application Software Entity Security Standards .....	91
2.6.3.2.1.1 Evaluation Criteria Security Standards .....	91
2.6.3.2.1.2 Web Security Standards .....	91
2.6.3.2.2 Application Platform Entity Security Standards .....	91
2.6.3.2.2.1 Software-Engineering Services Security .....	91
2.6.3.2.2.1.1 Generic Security Service-Application Program Interface Security .....	91
2.6.3.2.2.2 Operating-System Services Security .....	92
2.6.3.2.2.2.1 Evaluation-Criteria Security Standards .....	92
2.6.3.2.2.2.2 Authentication Security Standards .....	92
2.6.3.2.2.3 Distributed-Computing Services Security Standards .....	92
2.6.3.3 Information-Transfer Security Standards .....	93
2.6.3.3.1 End-System Security Standards .....	93
2.6.3.3.1.1 Host Security Standards .....	93
2.6.3.3.1.1.1 Security Protocols .....	93
2.6.3.3.1.1.2 Medium-Assurance Public-Key Infrastructure Security Standards .....	94
2.6.3.3.1.1.2.1 Background .....	94
2.6.3.3.1.1.2.2 Certificate Profiles .....	95
2.6.3.3.1.1.2.3 Operational Protocols and Exchange Formats .....	95
2.6.3.3.1.1.2.4 Management Protocols .....	96
2.6.3.3.1.1.2.5 Application Program Interfaces (APIs) .....	96
2.6.3.3.1.1.2.6 Cryptography .....	96
2.6.3.3.2 Network Security Standards .....	96

2.6.3.3.2.1 Internetworking Security Standards.....	97
2.6.3.4 Information-Modeling, Metadata, and Information-Exchange Security Standards.....	100
2.6.3.5 Human-Computer Interface Security Standards.....	100
<b>Command, Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance (C4ISR) Domain Annex .....</b>	<b>101</b>
C4ISR.1 Domain Overview .....	101
C4ISR.1.1 Purpose .....	101
C4ISR.1.2 Background .....	101
C4ISR.1.3 Domain Description .....	101
C4ISR.1.4 Scope And Applicability.....	102
C4ISR.1.5 Technical Reference Model.....	102
C4ISR.1.6 Domain Organization.....	102
C4ISR.2 Additions to the JTA Core.....	103
C4ISR.2.1 Introduction.....	103
C4ISR.2.2 Information-Processing Standards .....	103
C4ISR.2.2.1 Introduction .....	103
C4ISR.2.2.2 Mandated Standards.....	103
C4ISR.2.2.2.1 Still-Imagery Data Interchange .....	103
C4ISR.2.2.3 Emerging Standards .....	104
C4ISR.2.3 Information-Transfer Standards .....	104
C4ISR.2.3.1 Introduction .....	104
C4ISR.2.3.2 Mandated Standards.....	104
C4ISR.2.3.2.1 Transmission Media.....	104
C4ISR.2.3.2.1.1 Radio Communications .....	105
C4ISR.2.3.2.1.1.1 Common Data Link Standards .....	105
C4ISR.2.3.2.1.1.2 Unattended MASINT Sensor Communication Standards .....	105
C4ISR.2.3.3 Emerging Standards .....	106
C4ISR.2.4 Information-Modeling, Metadata and Information-Exchange Standards .....	106
C4ISR.2.4.1 Introduction .....	106
C4ISR.2.4.2 Mandated Standards.....	106
C4ISR.2.4.2.1 Information-Exchange Standards .....	106
C4ISR.2.4.2.1.1 Target/Threat Data Interchange Standards.....	106
C4ISR.2.4.3 Emerging Standards .....	106
C4ISR.2.5 Human-Computer Interface Standards.....	107
C4ISR.2.5.1 Introduction .....	107
C4ISR.2.5.2 Mandated Standards.....	107
C4ISR.2.5.3 Emerging Standards .....	107
C4ISR.2.6 Information-Security Standards.....	107
C4ISR.2.6.1 Introduction .....	107
C4ISR.2.6.2 Mandated Standards.....	107
C4ISR.2.6.3 Emerging Standards .....	107
C4ISR.3 Domain-Specific Service Areas .....	107
C4ISR.3.1 Introduction.....	107
C4ISR.3.2 Payload-Platform Interface.....	107
C4ISR.3.2.1 Introduction .....	107
C4ISR.3.2.2 Mandated Standards.....	107
C4ISR.3.2.2.1 Navigation, Geospatial.....	108
C4ISR.3.2.2.2 Internal Communications .....	108
C4ISR.3.2.2.2.1 Fibre Channel .....	108
C4ISR.3.2.2.2.2 FireWire .....	108
C4ISR.3.2.2.3 Vehicle/Sensor Telemetry.....	108
C4ISR.3.2.2.4 Mission Recorder .....	109
C4ISR.3.2.3 Emerging Standards .....	109
<b>Cryptologic Subdomain Annex for the C4ISR Domain .....</b>	<b>111</b>
C4ISR.CRY.1 Subdomain Overview .....	111

C4ISR.CRY.1.1 Purpose .....	111
C4ISR.CRY.1.2 Background.....	111
C4ISR.CRY.1.3 Subdomain Description.....	111
C4ISR.CRY.1.4 Scope.....	112
C4ISR.CRY.1.5 Applicability .....	112
C4ISR.CRY.1.6 Subdomain Organization .....	112
C4ISR.CRY.2 Standards in Addition to the JTA Core and C4ISR Domain.....	112
C4ISR.CRY.2.1 Introduction .....	112
C4ISR.CRY.2.2 Information-Processing Standards.....	112
C4ISR.CRY.2.2.1 Introduction .....	112
C4ISR.CRY.2.2.2 Mandated Standards .....	112
C4ISR.CRY.2.2.3 Emerging Standards.....	112
C4ISR.CRY.2.3 Information-Transfer Standards .....	112
C4ISR.CRY.2.3.1 Introduction .....	112
C4ISR.CRY.2.3.2 Mandated Standards .....	113
C4ISR.CRY.2.3.2.1 Sub Networks .....	113
C4ISR.CRY.2.3.2.1.1 Fibre Channel .....	113
C4ISR.CRY.2.3.2.1.2 Gigabit Ethernet.....	113
C4ISR.CRY.2.3.3 Emerging Standards.....	113
C4ISR.CRY.2.3.4 Storage Area Networks .....	113
C4ISR.CRY.2.4 Information-Modeling, Metadata, and Information-Exchange Standards.....	113
C4ISR.CRY.2.4.1 Introduction .....	113
C4ISR.CRY.2.4.2 Mandated Standards .....	113
C4ISR.CRY.2.4.3 Emerging Standards.....	113
C4ISR.CRY.2.5 Human-Computer Interface standards.....	114
C4ISR.CRY.2.5.1 Introduction .....	114
C4ISR.CRY.2.5.2 Mandated Standards .....	114
C4ISR.CRY.2.5.3 Emerging Standards.....	114
C4ISR.CRY.2.6 Information-Security Standards .....	114
C4ISR.CRY.2.6.1 Introduction.....	114
C4ISR.CRY.2.6.2 Mandated Standards .....	114
C4ISR.CRY.2.6.3 Emerging Standards.....	114
C4ISR.CRY.3 Subdomain-Specific Services and Interfaces.....	114
C4ISR.CRY.3.1 Introduction .....	114
C4ISR.CRY.3.2 Mandated Standards .....	114
C4ISR.CRY.3.2.1 Small-Scale Special-Purpose Devices .....	114
C4ISR.CRY.3.2.2 Backplanes and Circuit Cards .....	115
C4ISR.CRY.3.2.3 Conduction Cooling .....	115
C4ISR.CRY.3.3 Emerging Standards .....	115
C4ISR.CRY.3.3.1 Backplanes and Circuit Cards .....	115
<b>Nuclear Command and Control Subdomain Annex for the C4ISR Domain .....</b>	<b>117</b>
C4ISR.NCC.1 Subdomain Overview.....	117
C4ISR.NCC.1.1 Purpose .....	117
C4ISR.NCC.1.2 Background .....	117
C4ISR.NCC.1.3 Subdomain Description.....	117
C4ISR.NCC.1.4 Scope and Applicability .....	117
C4ISR.NCC.1.5 Technical Reference Model.....	118
C4ISR.NCC.1.6 Subdomain Annex Organization.....	118
C4ISR.NCC.2 Additions to C4ISR Domain Service Areas.....	118
C4ISR.NCC.2.1 Introduction .....	118
C4ISR.NCC.2.2 Information-Processing Standards .....	118
C4ISR.NCC.2.2.1 Introduction.....	118
C4ISR.NCC.2.2.2 Mandated Standards .....	119
C4ISR.NCC.2.2.3 Emerging Standards.....	119
C4ISR.NCC.2.3 Information-Transfer Standards.....	119
C4ISR.NCC.2.3.1 Introduction.....	119
C4ISR.NCC.2.3.2 Mandated Standards .....	119

C4ISR.NCC.2.3.3 Emerging Standards.....	119
C4ISR.NCC.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	119
C4ISR.NCC.2.4.1 Introduction.....	119
C4ISR.NCC.2.4.2 Mandated Standards .....	120
C4ISR.NCC.2.4.3 Emerging Standards.....	120
C4ISR.NCC.2.5 Human-Computer Interface standards .....	120
C4ISR.NCC.2.5.1 Introduction.....	120
C4ISR.NCC.2.5.2 Mandated Standards .....	120
C4ISR.NCC.2.5.3 Emerging Standards.....	120
C4ISR.NCC.2.6 Information-Security Standards .....	120
C4ISR.NCC.2.6.1 Introduction.....	120
C4ISR.NCC.2.6.2 Mandated Standards .....	120
C4ISR.NCC.2.6.3 Emerging Standards.....	120
C4ISR.NCC.3 Subdomain-Specific Service Areas.....	121
<b>Space Reconnaissance Subdomain Annex for the C4ISR Domain .....</b>	<b>123</b>
C4ISR.SR.1 Subdomain Overview.....	123
C4ISR.SR.1.1 Purpose .....	123
C4ISR.SR.1.2 Background .....	123
C4ISR.SR.1.3 Subdomain Description .....	123
C4ISR.SR.1.4 Scope and Applicability .....	123
C4ISR.SR.1.5 Technical Reference Model.....	124
C4ISR.SR.1.5.1 SR TRM Defined .....	124
C4ISR.SR.1.5.2 SR Functional Reference Model Defined.....	124
C4ISR.SR.1.6 Subdomain Annex Organization.....	130
C4ISR.SR.2 Additions to C4ISR Domain Service Areas and JTA Core .....	130
C4ISR.SR.2.1 Introduction.....	130
C4ISR.SR.2.2 Information-Processing Standards .....	130
C4ISR.SR.2.2.1 Introduction .....	130
C4ISR.SR.2.2.2 Mandated Standards.....	130
C4ISR.SR.2.2.3 Emerging Standards .....	131
C4ISR.SR.2.3 Information-Transfer Standards.....	131
C4ISR.SR.2.3.1 Introduction .....	131
C4ISR.SR.2.3.2 Mandated Standards.....	131
C4ISR.SR.2.3.2.1 Hardware Mandated Standards .....	131
C4ISR.SR.2.3.3 Emerging Standards .....	131
C4ISR.SR.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	131
C4ISR.SR.2.4.1 Introduction .....	131
C4ISR.SR.2.4.2 Mandated Standards .....	131
C4ISR.SR.2.4.3 Emerging Standards .....	131
C4ISR.SR.2.5 Human-Computer Interface Standards.....	132
C4ISR.SR.2.5.1 Introduction .....	132
C4ISR.SR.2.5.2 Mandated Standards.....	132
C4ISR.SR.2.5.3 Emerging Standards .....	132
C4ISR.SR.2.6 Information-Security Standards .....	132
C4ISR.SR.2.6.1 Introduction .....	132
C4ISR.SR.2.6.2 Mandated Standards.....	132
C4ISR.SR.2.6.3 Emerging Standards .....	132
C4ISR.SR.3 Subdomain-Specific Service Areas .....	132
<b>Combat Support Domain Annex .....</b>	<b>133</b>
CS.1 Domain Overview .....	133
CS.1.1 Purpose.....	133
CS.1.2 Background.....	133
CS.1.3 Domain Description.....	133
CS.1.4 Scope and Applicability .....	134
CS.1.5 Technical Reference Model .....	134

CS.1.6 Annex Organization .....	134
CS.2 Additions to JTA Core .....	134
CS.2.1 Introduction .....	134
CS.2.2 Information-Processing Standards.....	134
CS.2.2.1 Introduction .....	134
CS.2.2.2 Mandated Standards .....	134
CS.2.2.2.1 Document Interchange .....	134
CS.2.2.2.2 Graphics Data Interchange.....	134
CS.2.2.2.3 Product Data Interchange.....	135
CS.2.2.2.4 Electronic Data Interchange .....	136
CS.2.2.2.5 Configuration Management Data Interchange.....	136
CS.2.2.3 Emerging Standards .....	136
CS.2.2.3.1 Product Data Interchange.....	136
CS.2.3 Information-Transfer Standards.....	137
CS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards.....	137
CS.2.5 Human-Computer Interface Standards .....	137
CS.2.6 Information-Security Standards .....	138
CS.3 Domain-Specific Service Areas and Interfaces .....	138
CS.3.1 Electronic Business/Electronic Commerce .....	138
CS.3.1.1 Introduction .....	138
CS.3.1.2 Mandated Standards .....	138
CS.3.1.2.1 Smart Card Technology Standards .....	138
CS.3.1.3 Emerging Standards .....	138
CS.3.1.3.1 Smart-Card Technology Standards .....	138
<b>Automatic Test Systems Subdomain Annex for the Combat Support Domain.....</b>	<b>141</b>
CS.ATS.1 Subdomain Overview .....	141
CS.ATS.1.1 Purpose.....	141
CS.ATS.1.2 Background.....	141
CS.ATS.1.3 Subdomain Description .....	142
CS.ATS.1.4 Scope and Applicability .....	143
CS.ATS.1.5 Technical Reference Model .....	144
CS.ATS.1.5.1 Hardware .....	144
CS.ATS.1.5.2 Software.....	145
CS.ATS.1.6 Subdomain Annex Organization .....	148
CS.ATS.1.7 Configuration Management.....	148
CS.ATS.2 Additions to the JTA Core .....	148
CS.ATS.2.1 Introduction .....	148
CS.ATS.2.2 Information-Processing Standards.....	148
CS.ATS.2.2.1 Introduction .....	148
CS.ATS.2.2.2 Mandated Standards .....	148
CS.ATS.2.2.2.1 Data Interchange Services .....	148
CS.ATS.2.2.2.1.1 Instrument Driver API Standards .....	148
CS.ATS.2.2.2.1.2 Digital Test Data Formats .....	149
CS.ATS.2.2.3 Emerging Standards .....	149
CS.ATS.2.2.3.1 Data Interchange Services .....	149
CS.ATS.2.2.3.1.1 Resource Adapter Interface .....	149
CS.ATS.2.2.3.1.2 Diagnostic-Processing Standards .....	150
CS.ATS.2.2.3.1.3 Adapter Function and Parametric Data Standards .....	150
CS.ATS.2.2.3.1.4 ATS Instrument Function and Parametric Data Standards .....	150
CS.ATS.2.2.3.1.5 ATS Switching Function and Parametric Data Standards.....	151
CS.ATS.2.2.3.1.6 UUT Test Requirements Data Standards .....	151
CS.ATS.2.3 Information-Transfer Standards .....	151
CS.ATS.2.3.1 Introduction .....	151
CS.ATS.2.3.2 Mandated Standards .....	151
CS.ATS.2.3.2.1 Data Networking Standards.....	151
CS.ATS.2.3.2.2 Instrument Communication Manager Standards .....	152
CS.ATS.2.3.3 Emerging Standards .....	152

CS.ATS.2.3.3.1 Maintenance Test Data and Services (MTD) .....	152
CS.ATS.2.3.3.2 Product Design Data (PDD) .....	153
CS.ATS.2.3.3.3 Built-In Test Data (BTD) .....	153
CS.ATS.2.3.3.4 Resource Management Services (RMSs) .....	153
CS.ATS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	154
CS.ATS.2.4.1 Introduction .....	154
CS.ATS.2.4.2 Mandated Standards .....	154
CS.ATS.2.4.3 Emerging Standards .....	154
CS.ATS.2.5 Human-Computer Interface Standards .....	154
CS.ATS.2.5.1 Introduction .....	154
CS.ATS.2.5.2 Mandated Standards .....	154
CS.ATS.2.5.3 Emerging Standards .....	154
CS.ATS.2.6 Information-Security Standards .....	154
CS.ATS.2.6.1 Introduction .....	154
CS.ATS.2.6.2 Mandated Standards .....	154
CS.ATS.2.6.3 Emerging Standards .....	154
CS.ATS.3 Subdomain-Specific Service Areas .....	154
CS.ATS.3.1 Software-Engineering Services .....	154
CS.ATS.3.2 Data/Information Services .....	154
CS.ATS.3.2.1 Introduction .....	154
CS.ATS.3.2.2 Mandated Standards .....	154
CS.ATS.3.2.3 Emerging Standards .....	155
CS.ATS.3.2.3.1 Runtime Services .....	155
CS.ATS.3.3 Platform/Environment Services .....	155
CS.ATS.3.3.1 Introduction .....	155
CS.ATS.3.3.2 Mandated Standards .....	155
CS.ATS.3.3.2.1 Computer to External Environments .....	155
CS.ATS.3.3.2.2 System Framework Standards .....	155
CS.ATS.3.3.3 Emerging Standards .....	156
CS.ATS.3.3.3.1 Receiver/Fixture Interface .....	156
CS.ATS.3.3.3.2 Switching Matrix Interface .....	156
CS.ATS.3.3.4 Other Interfaces .....	156
CS.ATS.3.3.4.1 Computer Asset Controller Interface .....	157
CS.ATS.3.3.4.2 Host Computer Interface .....	157
CS.ATS.3.3.4.3 Instrument Control Bus Interface .....	157
CS.ATS.3.3.4.4 Instrument Command Language .....	157
CS.ATS.3.3.4.5 Application Development Environments .....	157
<b>Defense Transportation System Subdomain Annex for the Combat Support Domain .....</b>	<b>159</b>
CS.DTS.1 Subdomain Overview .....	159
CS.DTS.1.1 Purpose .....	159
CS.DTS.1.2 Background .....	159
CS.DTS.1.3 Subdomain Description .....	159
CS.DTS.1.4 Scope and Applicability .....	159
CS.DTS.1.5 Technical Reference Model .....	159
CS.DTS.1.6 Subdomain Annex Organization .....	159
CS.DTS.2 Additions to JTA Core and Combat Support Domain Annex .....	160
CS.DTS.2.1 Introduction .....	160
CS.DTS.2.2 Information-Processing Standards .....	160
CS.DTS.2.2.1 Introduction .....	160
CS.DTS.2.2.2 Mandated Standards .....	160
CS.DTS.2.2.2.1 Product Data Interchange .....	160
CS.DTS.2.3 Information-Transfer Standards .....	160
CS.DTS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	160
CS.DTS.2.5 Human-Computer Interface Standards .....	160
CS.DTS.2.6 Information-Security Standards .....	161
CS.DTS.2.6.1 Introduction .....	161
CS.DTS.2.6.2 Mandated Standards .....	161

CS.DTS.2.6.3 Emerging Standards.....	161
CS.DTS.2.6.3.1 Internetworking Security Standards .....	161
CS.DTS.3 Subdomain Specific Service Areas .....	161
<b>Medical Subdomain Annex for the Combat Support Domain .....</b>	<b>163</b>
CS.MED.1 Subdomain Overview .....	163
CS.MED.1.1 Purpose.....	163
CS.MED.1.2 Background.....	163
CS.MED.1.3 Subdomain Description .....	163
CS.MED.1.4 Scope and Applicability .....	164
CS.MED.1.5 Technical Reference Model .....	164
CS.MED.1.6 Subdomain Annex Organization .....	164
CS.MED.2 Additions to JTA Core and Combat Support Domain Annex.....	164
CS.MED.2.1 Introduction .....	164
CS.MED.2.2 Information Processing Standards .....	164
CS.MED.2.2.1 Introduction .....	164
CS.MED.2.2.2 Mandated Standards .....	164
CS.MED.2.2.2.1 Medical Electronic Data Interchange.....	164
CS.MED.2.2.2.2 Retail Pharmacy Claims Electronic Data Interchange.....	165
CS.MED.2.2.2.3 Medical Still-Imagery Data Interchange.....	165
CS.MED.2.2.2.4 Medical Information-Exchange Standards.....	165
CS.MED.2.2.3 Emerging Standards .....	166
CS.MED.2.2.3.1 Commercial Electronic Data Interchange .....	166
CS.MED.2.3 Information-Transfer Standards .....	166
CS.MED.2.3.1 Introduction .....	166
CS.MED.2.3.2 Mandated Standards .....	166
CS.MED.2.3.3 Emerging Standards.....	166
CS.MED.2.3.3.1 Medical Device Communications .....	167
CS.MED.2.4 Information-Modeling, Metadata, and Information-Exchange Standards.....	167
CS.MED.2.4.1 Introduction .....	167
CS.MED.2.4.2 Mandated Standards .....	167
CS.MED.2.4.3 Emerging Standards .....	167
CS.MED.2.4.3.1 Medical Information-Exchange Standards.....	167
CS.MED.2.5 Human-Computer Interface Standards .....	168
CS.MED.2.5.1 Introduction .....	168
CS.MED.2.5.2 Mandated Standards .....	168
CS.MED.2.5.3 Emerging Standards .....	168
CS.MED.2.6 Information-Security Standards.....	168
CS.MED.2.6.1 Introduction .....	168
CS.MED.2.6.2 Mandated Standards .....	168
CS.MED.2.6.3 Emerging Standards .....	168
<b>Modeling and Simulation Domain Annex.....</b>	<b>169</b>
M&S.1 Domain Overview .....	169
M&S.1.1 Purpose.....	169
M&S.1.2 Background .....	169
M&S.1.3 Domain Description .....	170
M&S.1.4 Scope and Applicability .....	171
M&S.1.5 Technical Reference Model .....	171
M&S.1.6 Annex Organization.....	171
M&S.2 Additions to the JTA Core.....	171
M&S.2.1 Introduction .....	171
M&S.2.2 Information-Processing Standards .....	172
M&S.2.2.1 Introduction .....	172
M&S.2.2.2 Mandated Standards.....	172
M&S.2.2.2.1 HLA Framework and Rules.....	172
M&S.2.2.2.2 HLA Federate Interface Specification .....	172

M&S.2.2.2.3 HLA Object Model Template (OMT) .....	172
M&S.2.3 Information-Transfer Standards .....	173
M&S.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	173
M&S.2.4.1 Introduction .....	173
M&S.2.4.2 Mandated Standards .....	173
M&S.2.4.2.1 Federation Execution Details Data Interchange Format .....	173
M&S.2.4.2.2 Object Model Template Data Interchange Format .....	173
M&S.2.4.2.3 Standard Simulator Database Interchange Format .....	173
M&S.2.4.3 Emerging Standards .....	173
M&S.2.4.3.1 Synthetic Environment Data Representation and Interchange Specification .....	173
M&S.2.4.3.2 Object Model Data Dictionary .....	174
M&S.2.5 Human-Computer Interface Standards .....	174
M&S.2.6 Information-Security Standards .....	174
M&S.3 Domain-Specific Service Areas .....	174
<b>Weapon Systems Domain Annex .....</b>	<b>175</b>
WS.1 Domain Overview .....	175
WS.1.1 Purpose .....	175
WS.1.2 Background .....	175
WS.1.3 Domain Description .....	175
WS.1.4 Scope And Applicability .....	176
WS.1.5 Technical Reference Model .....	177
WS.1.5.1 DoD TRM Views .....	177
WS.1.5.1.1 Performance Environment .....	178
WS.1.5.1.2 Application Hardware Environment .....	178
WS.1.5.2 Hierarchy of TRM Views .....	179
WS.1.6 Domain Annex Organization .....	179
WS.2 Additions to the JTA Core .....	179
WS.2.1 Introduction .....	179
WS.2.2 Information-Processing Standards .....	179
WS.2.2.1 Introduction .....	179
WS.2.2.2 Mandated Standards .....	179
WS.2.2.3 Emerging Standards .....	179
WS.2.2.3.1 Operating-System Services .....	179
WS.2.2.3.2 Real-Time Common Object Request Broker Architecture .....	179
WS.2.3 Information-Transfer Standards .....	179
WS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	180
WS.2.4.1 Introduction .....	180
WS.2.4.2 Mandated Standards .....	180
WS.2.4.3 Emerging Standards .....	180
WS.2.5 Human-Computer Interface Standards .....	180
WS.2.5.1 Introduction .....	181
WS.2.5.2 Mandated Standards .....	181
WS.2.5.3 Emerging Standards .....	181
WS.2.6 Information-Security Standards .....	181
WS.3 Domain-Specific Service Areas and Interfaces .....	181
WS.3.1 Introduction .....	181
WS.3.2 Application Software Layer Interfaces .....	181
WS.3.3 System Services Layer Interfaces .....	181
WS.3.4 Resource Access Services Layer Interfaces .....	182
WS.3.5 Physical Resources Layer Interfaces .....	182
WS.3.5.1 Introduction .....	182
WS.3.5.2 Mandated Standards .....	182
WS.3.5.3 Emerging Standards .....	182
WS.3.6 Combat Identification (CI) Services .....	182
WS.3.6.1 Identification Friend or Foe (IFF) .....	182
WS.3.6.1.1 Introduction .....	183
WS.3.6.1.2 Mandated Standards .....	183



WS.3.6.1.3 Emerging Standards .....	183
<b>Aviation Subdomain Annex for the Weapon Systems Domain.....</b>	<b>185</b>
WS.AV.1 Subdomain Overview.....	185
WS.AV.1.1 Purpose .....	185
WS.AV.1.2 Background .....	185
WS.AV.1.3 Subdomain Description .....	185
WS.AV.1.4 Scope And Applicability .....	185
WS.AV.1.5 Technical Reference Model.....	185
WS.AV.1.6 Subdomain Annex Organization.....	185
WS.AV.2 Additions to the JTA Core.....	186
WS.AV.2.1 Introduction.....	186
WS.AV.2.2 Information-Processing Standards .....	186
WS.AV.2.2.1 Introduction .....	186
WS.AV.2.2.2 Mandated Standards .....	186
WS.AV.2.2.3 Emerging Standards .....	186
WS.AV.2.2.3.1 Service-Area Standards .....	186
WS.AV.2.2.3.1.1 Operating-System Services .....	186
WS.AV.2.3 Information-Transfer Standards .....	186
WS.AV.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	186
WS.AV.2.5 Human-Computer Interface Standards.....	186
WS.AV.2.5.1 Introduction .....	186
WS.AV.2.5.2 Mandated Standards.....	186
WS.AV.2.5.2.1 Symbology .....	186
WS.AV.2.5.3 Emerging Standards .....	186
WS.AV.2.6 Information-Security Standards.....	186
WS.AV.3 Subdomain-Specific Service Areas .....	187
WS.AV.3.1 Global Air Traffic Management Standards .....	187
WS.AV.3.2 Introduction.....	187
WS.AV.3.2.1 Mandated Standards.....	187
WS.AV.3.2.2 Emerging Standards .....	187
<b>Ground Vehicle Subdomain Annex for the Weapon Systems Domain .....</b>	<b>189</b>
WS.GV.1 Subdomain Overview .....	189
WS.GV.1.1 Purpose.....	189
WS.GV.1.2 Background.....	189
WS.GV.1.3 Subdomain Description .....	189
WS.GV.1.4 Scope And Applicability .....	189
WS.GV.1.5 Technical Reference Model .....	189
WS.GV.1.6 Subdomain Annex Organization .....	189
WS.GV.2 Additions to the JTA Core .....	189
WS.GV.2.1 Introduction .....	189
WS.GV.2.2 Information-Processing Standards.....	190
WS.GV.2.2.1 Introduction .....	190
WS.GV.2.2.2 Mandated Standards .....	190
WS.GV.2.2.3 Emerging Standards .....	190
WS.GV.2.3 Information-Transfer Standards .....	190
WS.GV.2.4 Information-Modeling, Metadata, and Information-Exchange Standards.....	190
WS.GV.2.5 Human-Computer Interface Standards .....	190
WS.GV.2.6 Information-Security Standards .....	190
WS.GV.3 Subdomain-Specific Service Areas and Interfaces .....	190
WS.GV.3.1 Introduction .....	190
WS.GV.3.2 Application Software Layer Interfaces .....	190
WS.GV.3.3 System Services Layer Interfaces.....	191
WS.GV.3.4 Resource Access Services Layer Interfaces.....	191
WS.GV.3.5 Physical Resources Layer Interfaces.....	191
WS.GV.3.5.1 Introduction .....	191

WS.GV 3.5.2 Mandated Standards .....	191
WS.GV 3.5.3 Emerging Standards .....	191
<b>Missile Defense Subdomain Annex for the Weapon Systems Domain .....</b>	<b>193</b>
WS.MD.1 Subdomain Overview .....	193
WS.MD.1.1 Purpose .....	193
WS.MD.1.2 Background .....	193
WS.MD.1.3 Subdomain Description .....	194
WS.MD.1.4 Scope and Applicability .....	194
WS.MD.1.5 Technical Reference Model (TRM) .....	194
WS.MD.1.6 Subdomain Annex Organization .....	195
WS.MD.2 Additions to the JTA Core .....	195
WS.MD.2.1 Introduction .....	195
WS.MD.2.2 Information-Processing Standards .....	195
WS.MD.2.2.1 Introduction .....	195
WS.MD.2.2.2 Mandated Standards .....	195
WS.MD.2.2.3 Emerging Standards .....	195
WS.MD.2.2.3.1 Navigation Standard .....	195
WS.MD.2.2.3.2 Real-Time Defense Information Infrastructure Common Operating Environment (DII COE) .....	195
WS.MD.2.3 Information-Transfer Standards .....	196
WS.MD.2.3.1 Introduction .....	196
WS.MD.2.3.2 Mandated Standards .....	196
WS.MD.2.3.2.1 Time Synchronization .....	196
WS.MD.2.3.3 Emerging Standards .....	196
WS.MD.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	196
WS.MD.2.4.1 Introduction .....	196
WS.MD.2.4.2 Mandated Standards .....	196
WS.MD.2.4.2.1 Bit-Oriented Formatted Messages .....	196
WS.MD.2.4.3 Emerging Standards .....	196
WS.MD.2.5 Human-Computer Interface Standards .....	197
WS.MD.2.5.1 Introduction .....	197
WS.MD.2.5.2 Mandated Standards .....	197
WS.MD.2.5.2.1 Symbology .....	197
WS.MD.2.6 Information-Security Standards .....	197
WS.MD.3 Subdomain-Specific Service Areas and Interfaces .....	197
<b>Missile Systems Subdomain Annex for the weapon systems domain .....</b>	<b>199</b>
WS.MS.1 Subdomain Overview .....	199
WS.MS.1.1 Purpose .....	199
WS.MS.1.2 Background .....	199
WS.MS.1.3 Subdomain Description .....	199
WS.MS.1.4 Scope and Applicability .....	200
WS.MS.1.5 Technical Reference Model .....	200
WS.MS.1.6 Subdomain Annex Organization .....	200
WS.MS.2 Additions to JTA Core .....	200
WS.MS.2.1 Introduction .....	200
WS.MS.2.2 Information-Processing Standards .....	200
WS.MS.2.3 Information-Transfer Standards .....	200
WS.MS.2.4 Information-Modeling and Data Exchange Standards .....	200
WS.MS.2.5 Human-Computer Interface Standards .....	200
WS.MS.2.6 Information-Security Standards .....	200
WS.MS.3 Subdomain-Specific Services and Interfaces .....	201
WS.MS.3.1 Introduction .....	201
WS.MS.3.2 Application Software Layer Interfaces .....	201
WS.MS.3.3 System Services Layer Interfaces .....	201
WS.MS.3.4 Resource Access Services Layer Interfaces .....	201

WS.MS.3.5 Physical Resources Layer Interfaces.....	201
WS.MS.3.5.1 Introduction .....	201
WS.MS.3.5.2 Mandated Standards .....	201
WS.MS.3.5.3 Emerging Standards.....	201
<b>Munition Systems Subdomain Annex for the Weapon Systems Domain .....</b>	<b>203</b>
WS.MUS.1 Subdomain Overview .....	203
WS.MUS.1.1 Purpose .....	203
WS.MUS.1.2 Background .....	203
WS.MUS.1.3 Subdomain Description .....	203
WS.MUS.1.4 Scope and Applicability .....	204
WS.MUS.1.5 Technical Reference Model.....	204
WS.MUS.1.6 Subdomain Annex Organization .....	204
WS.MUS.2 Additions to the JTA Core.....	204
WS.MUS.2.1 Introduction .....	204
WS.MUS.2.2 Information-Processing Standards .....	204
WS.MUS.2.2.1 Introduction .....	204
WS.MUS.2.2.2 Mandated Standards.....	204
WS.MUS.2.2.3 Emerging Standards .....	204
WS.MUS.2.3 Information-Transfer Standards .....	204
WS.MUS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	204
WS.MUS.2.5 Human-Computer Interface Standards .....	205
WS.MUS.2.6 Information-Security Standards.....	205
WS.MUS.3 Subdomain-Specific Services and Interfaces .....	205
WS.MUS.3.1 Introduction .....	205
WS.MUS.3.2 Application Software Layer Interfaces.....	205
WS.MUS.3.3 System Services Layer Interfaces .....	205
WS.MUS.3.4 Resource Access Services Layer Interfaces .....	205
WS.MUS.3.5 Physical Resources Layer Interfaces .....	205
WS.MUS.3.5.1 Introduction .....	206
WS.MUS.3.5.2 Mandated Standards.....	206
WS.MUS.3.5.3 Emerging Standards .....	206
<b>Soldier Systems Subdomain Annex for the Weapon Systems Domain Annex.....</b>	<b>207</b>
WS.SS.1 Subdomain Overview.....	207
WS.SS.1.1 Purpose .....	207
WS.SS.1.2 Background .....	207
WS.SS.1.3 Subdomain Description .....	207
WS.SS.1.4 Scope and Applicability .....	208
WS.SS.1.5 Technical Reference Model.....	208
WS.SS.1.6 Subdomain Annex Organization.....	208
WS.SS.2 Subdomain-Specific Standards .....	208
WS.SS.2.1 Introduction.....	208
WS.SS.2.2 Information-Processing Standards .....	208
WS.SS.2.3 Information-Transfer Standards .....	208
WS.SS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards .....	208
WS.SS.2.5 Human-Computer Interface Standards.....	208
WS.SS.2.6 Information-Security Standards.....	208
WS.SS.3 Subdomain-Specific Services and Interfaces .....	209
WS.SS.3.1 Introduction.....	209
WS.SS.3.2 Application Software Layer Interfaces .....	209
WS.SS.3.3 System Services Layer Interfaces .....	209
WS.SS.3.4 Resource Access Services Layer Interfaces .....	209
WS.SS.3.5 Physical Resources Layer Interfaces .....	209
WS.SS.3.5.1 Introduction .....	209
WS.SS.3.5.2 Mandated Standards.....	209
WS.SS.3.5.3 Emerging Standards .....	210

<b>Appendix A: Abbreviations and Acronyms.....</b>	<b>211</b>
<b>Appendix B: List of Mandated Standards and Sources.....</b>	<b>229</b>
<b>Appendix C: Document Sources.....</b>	<b>335</b>
<b>Appendix D: References .....</b>	<b>341</b>
<b>Appendix E: JTA Relationship to DoD Standards Reform .....</b>	<b>343</b>
<b>Standards Index.....</b>	<b>365</b>
<b>Subject Index .....</b>	<b>379</b>

## List of Figures

Figure 1-1: DoD Warfighter Information Technology Environment - - - - -	1
Figure 1-2: Architecture Relationships - - - - -	5
Figure 1-3: JTA Hierarchy Model - - - - -	8
Figure 2.1-1: DoD Technical Reference Model (DoD TRM)- - - - -	16
Figure 2.5-1: HCI Development Guidance- - - - -	81
Figure C4ISR-1: Notional JTA Hierarchy- - - - -	102
Figure C4ISR.SR-1: Functional Reference Model - - - - -	125
Figure CS-1: Notional JTA Hierarchy - - - - -	133
Figure CS.ATS-1: Generic ATS Architecture - - - - -	143
Figure CS.ATS-2: Hardware Interfaces- - - - -	144
Figure CS.ATS-3: TPS Runtime Interfaces - - - - -	146
Figure CS.ATS-4: TPS Development Interfaces - - - - -	147
Figure M&S-1: Notional JTA Hierarchy - - - - -	170
Figure WS-1: Notional JTA Hierarchy - - - - -	176

Page intentionally left blank

## List of Tables

Table 1-1: JTA Development Group (JTADG) Voting Membership .....	12
Table 2.1-1: Interface Translation Table .....	17
Table 2.2-1: Common Document Interchange Formats .....	25
Table 2.2-2: ITU-T/EIA Standards Mandated in FTR 1080A-1998, Appendix A .....	50
Table C4ISR.SR-1: SR Functional Mapping of JTA .....	126

Page intentionally left blank




## Section 1: JTA Overview

The Department of Defense (DoD) warfighter battlespace is complex and dynamic, requiring timely and clear decisions by all levels of military command. There is an unprecedented increase in the amount of data and information necessary to conduct operational planning and combat decision-making. Information concerning targets, movement of forces, condition of equipment, levels of supplies, and disposition of assets—both friendly and unfriendly—must be provided to joint commanders and their forces. Therefore, information must flow quickly and seamlessly among all tactical, strategic, and supporting elements.

As shown in Figure 1-1, warfighters must be able to work together within and across Services in ways not totally defined in today's operational concepts and/or architectures. They must be able to obtain and use intelligence from national and theater assets that may be geographically dispersed among national and international locations. Today's split-base/reach-back concept requires them to obtain their logistics and administrative support from both home bases and deployed locations. All of this requires that information flow quickly and seamlessly among DoD's sensors, processing and command centers, shooters, and support activities to achieve dominant battlefield awareness and move inside the enemy's decision loop.

## Joint Technical Architecture (JTA) Concept

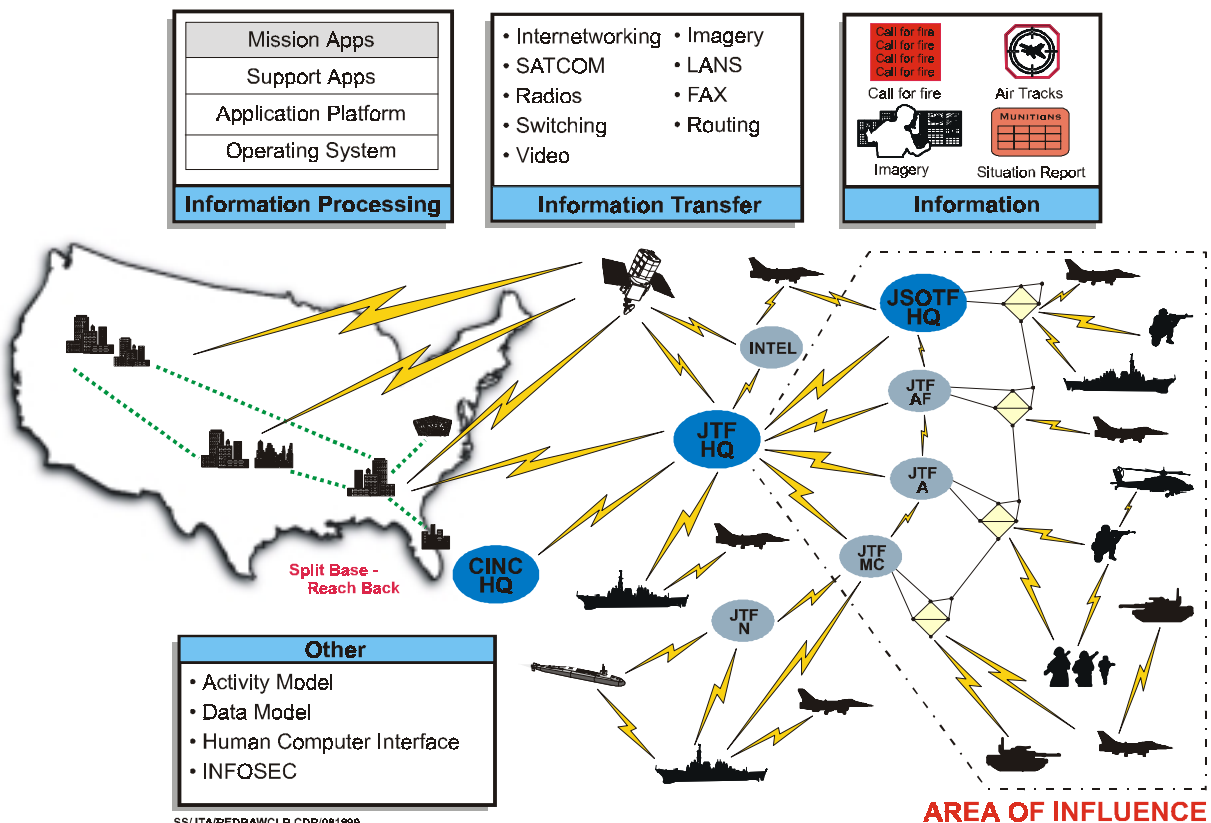

**Figure 1-1: DoD Warfighter Information Technology Environment**

The Joint Technical Architecture (JTA) provides the minimum set of standards that, when implemented, permits this flow of information in support of the warfighter. As shown in Figure 1-1, there must be:

- ☐ A distributed information-processing environment in which applications are integrated.
- ☐ Applications and data independent of hardware to achieve true integration.
- ☐ Information-transfer assets to ensure seamless communications within and across diverse media.
- ☐ Information in a common format with a common meaning.
- ☐ Common human-computer interfaces for users, and effective means to protect the information.

The current JTA concept is focused on the interoperability and standardization of information technology (IT). However, the JTA concept lends itself to application in other technology areas when required to support IT interoperability requirements.

## **1.1 Introduction to the Joint Technical Architecture**

This section provides an overview of the JTA. It includes the JTA Purpose, Scope, Background, and Applicability; introduces basic architecture concepts; and discusses the selection criteria for standards incorporated in the document.

### **1.1.1 Purpose**

A foremost objective of the JTA is to improve and facilitate the ability of our systems to support joint and combined operations in an overall investment strategy.

The DoD JTA:

- ☐ Provides the foundation for interoperability among all tactical, strategic, and combat support systems.
- ☐ Mandates interoperability standards and guidelines for system development and acquisition that will facilitate joint and coalition force operations. These standards are to be applied in concert with DoD standards reform.
- ☐ Communicates to industry DoD's intent to consider open-systems products and implementations.
- ☐ Acknowledges the direction of industry's standards-based development.

### **1.1.2 Scope**

The JTA is considered a living document and will be updated periodically, as a collaborative effort among the DoD Components (Commands, Services, and Agencies) to leverage technology advancements, standards maturity, open systems, and commercial product availability.

The JTA is critical to achieving the envisioned objective of a cost-effective, seamless integration environment. Achieving and maintaining this vision requires interoperability

- ☐ Within a Joint Task Force/Commander in Chief (CINC) Area of Responsibility (AOR).
- ☐ Across CINC AOR boundaries.
- ☐ Between strategic and tactical systems.
- ☐ Within and across Services and Agencies.
- ☐ From the battlefield to the sustaining base.
- ☐ Among U.S., Allied, and Coalition forces.
- ☐ Across current and future systems.

### 1.1.3 Applicability

Additional standards may be required to meet system requirements. This version of the DoD JTA mandates the minimum set of standards and guidelines for the acquisition of all DoD systems that produce, use, or exchange information. The applicable mandated standards in the JTA are the starting set of standards for a system, and additional standards may be used to meet requirements. The JTA is used by anyone involved in the management, development, or acquisition of new or improved systems within DoD. Specific guidance for implementing this JTA is provided in the separate DoD Component JTA implementation plans. Operational requirements developers are cognizant of the JTA in developing requirements and functional descriptions. System developers use the JTA to facilitate the achievement of interoperability for new and upgraded systems (and the interfaces to such systems). System integrators use it to foster the integration of existing and new systems.

The JTA will be updated periodically with continued DoD Component participation.

### 1.1.4 Background

The evolution of a national military strategy in the post-Cold War era and the lessons learned from conflicts like Desert Shield/Desert Storm have resulted in a new vision for DoD. Joint Vision 2010 is the conceptual template for how America's Armed Forces will channel the vitality and innovation of their people and leverage technological opportunities to achieve new levels of effectiveness in joint warfighting. This template provides a common direction to our Services in developing their unique capabilities within a joint framework of doctrine and programs as they prepare to meet an uncertain and challenging future. The Chairman of the Joint Chiefs of Staff said in Joint Vision 2010, "The nature of modern warfare demands that we fight as a joint team. This was important yesterday, it is essential today, and it will be even more imperative tomorrow."

Joint Vision 2010 (JV 2010) creates a broad framework for understanding joint warfare in the future, and for shaping Service programs and capabilities to fill our role within that framework. JV 2010 defines four operational concepts: Precision Engagement, Dominant Maneuver, Focused Logistics, and Full Dimensional Protection. These concepts combine to ensure that American forces can secure Full Spectrum Dominance, i.e., the capability to dominate an opponent across the range of military operations and domains. Furthermore, Full Spectrum Dominance requires Information Superiority, i.e., the capability to collect, process, analyze, and disseminate information while denying an adversary the ability to do the same. Interoperability is crucial to Information Superiority.

Recognizing the need for joint operations in combat and the reality of a shrinking budget, the Assistant Secretary of Defense (ASD) Command, Control, Communications, and Intelligence (C3I) issued a memorandum on 14 November 1995 to Command, Service, and Agency principals involved in the development of Command, Control, Communications, Computers, and Intelligence (C4I) systems. This directive tasked them to “reach a consensus of a working set of standards” and “establish a single, unifying DoD technical architecture that will become binding on all future DoD C4I acquisitions” so that “new systems can be born joint and interoperable, and existing systems will have a baseline to move towards interoperability.”

A Joint Technical Architecture Working Group (JTAWG), chaired by ASD(C3I), was formed, and its members agreed to use the U.S. Army Technical Architecture (ATA) as the starting point for the JTA. Version 1.0 of the JTA was released on 22 August 1996 and was immediately mandated by the Under Secretary of Defense, Acquisition and Technology (USD [A&T]) and ASD(C3I) for all new and upgraded C4I systems in DoD.

JTA Version 2.0 development began in March 1997 under the direction of a Technical Architecture Steering Group (TASG), cochaired by ASD(C3I) and USD(A&T) Open Systems Joint Task Force (OS-JTF). The applicability of Version 2.0 of the JTA was expanded to include the information technology in all DoD systems.

JTA Version 3.0 development began in June 1998. JTA Version 3.0 includes additional subdomain annexes and incorporates the newly developed DoD Technical Reference Model (DoD TRM). JTA Version 3.0 ensures that references to standards throughout the document are integrated in an automated fashion with reference information found in Appendix B.


### **1.1.5 Architectures Defined**

The C4ISR Architecture Framework provides information addressing the development and presentation of architectures. The framework provides the rules, guidance, and product descriptions for developing and presenting architectures to ensure a common denominator for understanding, comparing, and integrating architectures across and within DoD.

An architecture is defined as the structures or components, their relationships, and the principles and guidelines governing their design and evolution over time. DoD has implemented this by defining an interrelated set of architectures: Operational, Systems, and Technical. Figure 1-2 shows the relationship among the three architectures. The definitions are provided here to ensure a common understanding of the three architectures<sup>1</sup>.

---

1. These definitions are extracted from the C4ISR Architecture Framework 2.0. The definitions and the products required by the framework focus on information technology. However, the concepts described can be applied to a wide range of technologies.

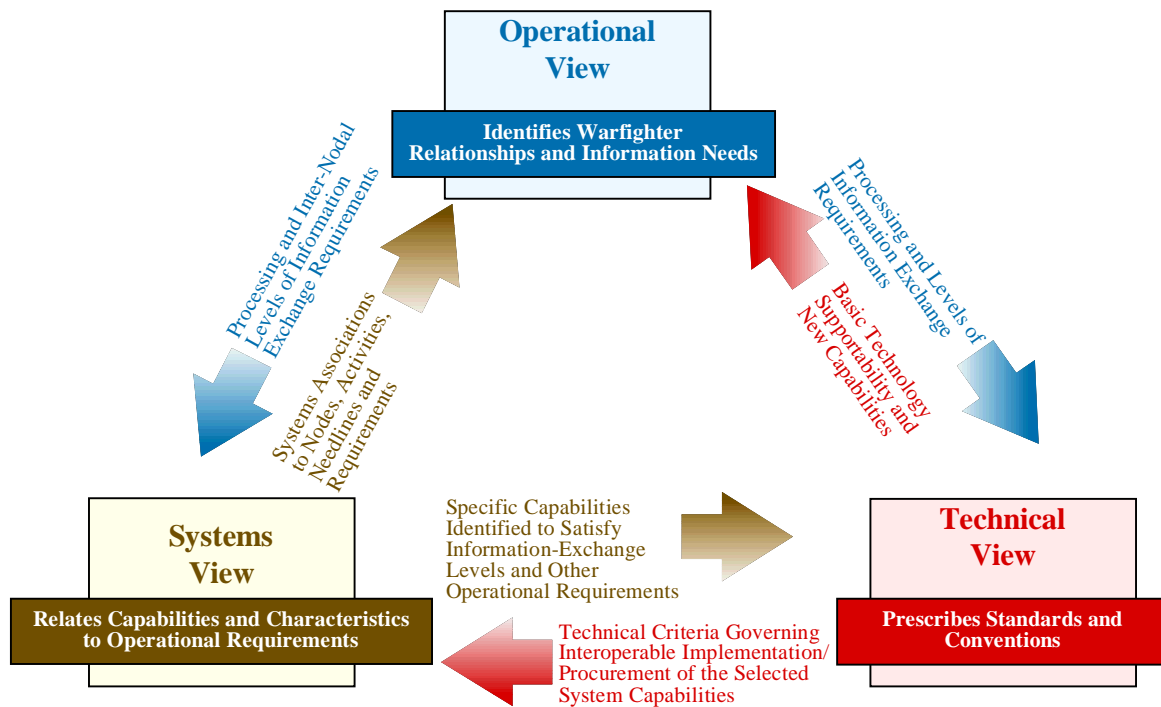

**Figure 1-2: Architecture Relationships**

#### 1.1.5.1 Operational Architecture View

The operational architecture (OA) view is a description of the tasks and activities, operational elements, and information flows required to accomplish or support a military operation.

It contains descriptions (often graphical) of the operational elements, assigned tasks and activities, and information flows required to support the warfighter. It defines the types of information exchanged, the frequency of exchange, which tasks and activities are supported by the information exchanges, and the nature of information exchanges in detail sufficient to ascertain specific interoperability requirements.

#### 1.1.5.2 Technical Architecture View

The technical architecture (TA) view is the minimal set of rules governing the arrangement, interaction, and interdependence of system parts or elements, whose purpose is to ensure that a conformant system satisfies a specified set of requirements.

The technical architecture view provides the technical systems-implementation guidelines upon which engineering specifications are based, common building blocks are established, and product lines are developed. The technical architecture view includes a collection of the technical standards, conventions, rules and criteria organized into profile(s) that govern system services, interfaces, and relationships for particular systems architecture views and that relate to particular operational views.

### 1.1.5.3 Systems Architecture View

The systems architecture (SA) view is a description, including graphics, of systems<sup>1</sup> and interconnections<sup>2</sup> providing for, or supporting, warfighting functions. For a domain, the systems architecture view shows how multiple systems link and interoperate, and may describe the internal construction and operations of particular systems within the architecture. For the individual system, the systems architecture view includes the physical connection, location, and identification of key nodes (including materiel-item nodes), circuits, networks, warfighting platforms, etc., and it specifies system and component performance parameters (e.g., mean time between failure, maintainability, availability). The systems architecture view associates physical resources and their performance attributes to the operational view and its requirements following standards defined in the technical architecture.

### 1.1.5.4 Relationship Between the C4ISR Architecture Framework 2.0 and the DoD JTA

The C4ISR Architecture Framework (CAF) defines the technical architecture view and a set of standard technical products for DoD use. The JTA is one of the Universal Reference Resources named in the CAF. The JTA is the primary source document to the essential and supporting Technical Architecture products defined in the C4ISR Architecture Framework. Standards chosen from the JTA and other sources to meet system and operational requirements are incorporated into the Technical Architecture View.

## 1.2 Document Organization

The JTA is organized into a main body, followed by domain annexes, subdomain annexes, and a set of appendices. This section describes the structure of the document.

### 1.2.1 General Organization

The main body identifies the “core” set of JTA elements consisting of service areas, interfaces, and standards. Each section of the main body, except for the overview, is divided into three subsections as follows:

- **Introduction:** This subsection is for information purposes only. It defines the purpose and scope of the subsection and provides background descriptions and definitions that are unique to the section.
- **Mandated Standards:** This subsection identifies mandatory standards or practices. Each mandated standard or practice is clearly identified on a separate bulletized (●) line and includes a formal reference citation suitable for inclusion within Requests for Proposals (RFPs), Statements of Work (SOWs), or Statements of Objectives (SOOs).
- **Emerging Standards:** This subsection provides an information-only description of standards that are candidates for possible addition to the JTA mandates. Each emerging standard is clearly identified on a separate dashed (–) line. The purpose of listing these candidates is to help the program manager determine those areas likely to change in the

---

1. Systems: People, machines, and facilities organized to accomplish a set of specific functions, which cannot be further subdivided while still performing required functions. Includes the radios, terminals, command, control, and support facilities, sensors and sensor platforms, automated information systems, etc., necessary for effective operations.  
 2. Interconnections: The manual, electrical, electronic, or optical communications paths/linkages between the systems. Includes the circuits, networks, relay platforms, switches, etc., necessary for effective communications.

near term (within 3 years) and suggest those areas in which “upgradability” should be a concern. The expectation is that emerging standards will be elevated to mandatory status when implementations of the standards mature. Emerging standards may be implemented, but shall not be used in lieu of a mandated standard.


### **1.2.2 Information-Technology Standards**

Section 2, also called the JTA Core or main body, addresses commercial and Government standards common to most DoD information technology, grouped into categories: Information-Processing Standards; Information-Transfer Standards; Information-Modeling, Metadata, and Information-Exchange Standards; Human-Computer Interface Standards; and Information-Systems Security Standards. Each category addresses a set of functions common to most DoD IT systems.

### **1.2.3 Domain and Subdomain Annexes**

The JTA Core contains the common service areas, interfaces, and standards (JTA elements) applicable to all DoD systems to support interoperability. Recognizing that there are additional JTA elements common within families of related systems (i.e., domains), the JTA adopted the domain and subdomain annex notion. A domain represents a grouping of systems sharing common functional, behavioral, and operational requirements. JTA domain and subdomain annexes are intended to exploit the common service areas, interfaces, and standards supporting interoperability across systems within the domain/subdomain.

The JTA domain annexes contain domain-specific JTA elements applicable within the specified family of systems, to further support interoperability within the systems represented in the domain—in addition to those included in the JTA Core. Domains may be composed of multiple subdomains. Subdomains represent the decomposition of a domain (referred to as the subdomain’s parent domain) into a subset of related systems, exploiting additional commonalities and addressing variances within the domain. Subdomain annexes contain domain-specific JTA elements applicable within the specified family of systems, to further support interoperability within the systems represented in the subdomain—in addition to those included in the JTA Core and in the parent domain annex. The relationships between the JTA Core, domain annexes, and subdomain annexes currently included in the JTA are illustrated in Figure 1-3.

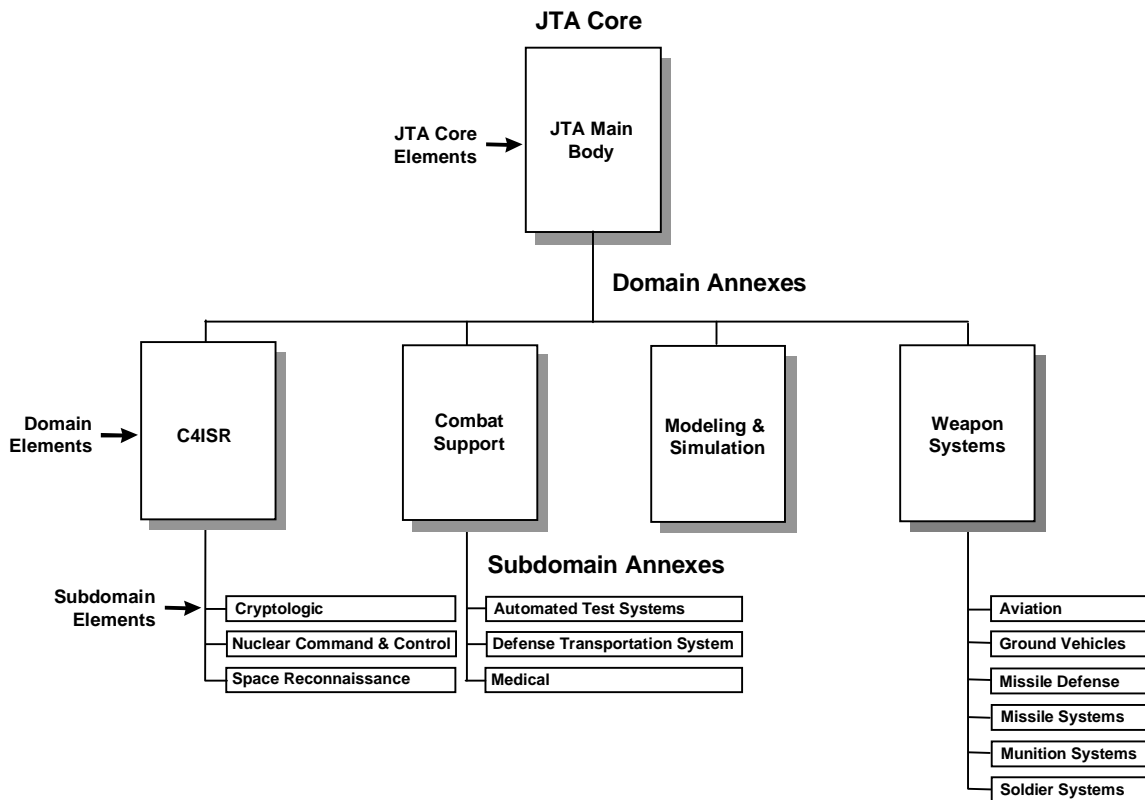

**Figure 1-3: JTA Hierarchy Model**

A program manager or engineer specifying or applying JTA standards for a specific system will first select all appropriate JTA Core elements, and then those included in the relevant domain and subdomain annex.

As shown in Figure 1-3, the following domain and subdomain annexes are currently populated:

- ☐ Domain Annexes:
  - Combat Support (CS).
  - Command, Control, Communications, Computers, Intelligence, Surveillance, and Reconnaissance (C4ISR).
  - Modeling and Simulation (M&S).
  - Weapon Systems (WS).
- ☐ Subdomain Annexes:
  - Automated Test Systems (ATS).
  - Aviation (AV).
  - Cryptologic (CRY).



- Defense Transportation System (DTS).
- Ground Vehicles (GV).
- Medical (MED).
- Missile Defense (MD).
- Missile Systems (MS).
- Munition Systems (MUS).
- Nuclear Command and Control (NCC).
- Soldier Systems (SS).
- Space Reconnaissance (SR).

The goal is to build on these annexes by incorporating the requirements of additional domains and subdomains. Each domain and subdomain annex includes an introduction clearly specifying the purpose, scope, description of the domain, and background of the domain and subdomain annex. As necessary, each domain and subdomain annex provides a list of domain-specific standards and guidance in a format consistent with the JTA Core. Domain and subdomain annexes generally use the DoD Technical Reference Model (DoD TRM) defined in [2.1.2](#), but may include a different or expanded model. Annex developers should define which standards apply to which system interfaces in their domain or subdomain. They may address emerging standards of interest to the domain or subdomain.

#### **1.2.4 Appendices (Appendix A, B, C, D, E, F)**

The appendices provide supporting information (e.g., how to get a copy of mandated standards) and available links to standards organizations' home pages, which facilitate the use of the document, but are not mainline to its purpose.

Appendix A, "Abbreviations and Acronyms" includes an abbreviations and acronym list.

Appendix B, "List of Mandated and Emerging Standards," includes "currently mandated," "previously mandated," and "emerging" standards for each JTA service area.

Appendix C, "Document Sources," is a list of the organizations from which documents cited in the JTA may be obtained.

Appendix D, "References," is a list of documents (e.g., a memo, a publication) that directs the reader's attention to a source of more information on a subject.

Appendix E, "JTA Relationship to DoD Standards Reform," describes the relationship of the JTA to the DoD Standards Reform begun in June 1994 and addresses the relevance of the reform waiver policy to the JTA.

Appendix F, "Glossary," is a list of terms with their meanings.

### 1.3 Key Considerations in Using the JTA

In general, the JTA is used to determine the specific service areas and standards for implementation within new or upgraded systems. However, there are several key considerations in using the JTA.

The JTA service areas are based on the DoD TRM. For a more complete description of the DoD TRM and service areas, refer to [2.1.2](#).

The mandatory standards in the JTA must be implemented or used by systems that have a need for the corresponding service areas. A standard is mandatory in the sense that if a service/interface is going to be implemented, it shall be implemented in accordance with the associated standard. If a required service can be obtained by implementing more than one standard (e.g., operating-system standards), the appropriate standard should be selected based on system requirements.

The JTA is a “forward-looking” document. It guides the acquisition and development of new and emerging functionality and provides a baseline toward which existing systems will move. It is a compendium of standards (for interfaces/services) that should be used now and in the future. It is NOT a catalog of all information-technology standards used within today’s DoD systems. If legacy standards are needed to interface with existing systems, they can be implemented on a case-by-case basis in addition to the mandated standard.

If cited, requirements documents not identified in the JTA should complement, and not conflict with, the JTA Core and applicable domain and subdomain annexes.

### 1.4 Element Normalization Rules

As the JTA evolves, the JTA elements contained in the JTA Core, domain annexes, and subdomain annexes will need to be periodically revisited and updated to ensure correctness. The JTA normalization rules in this section address the movement of elements across the core or annexes following the definitions and scope.

All standards are placed in the core unless they are justified as unacceptable to meet domain-specific requirements. When core standards cannot meet the requirements of a specific domain, JTA elements are removed from the JTA Core and placed in the appropriate domain annex(es). Likewise, when domain standards cannot meet subdomain-specific requirements, those will be removed from the domain annex and placed in the appropriate subdomain annex(es).

The intent of the above normalization rules is as follows: (1) The core applies to all DoD systems; (2) The JTA Core contains selected standards for as many JTA services as possible; and (3) A service area provides the minimum number of alternative standards applicable to DoD.

Figure 1-3 also illustrates a notional hierarchy of JTA Core, domains, and subdomains as defined by the Committee on Open Electronic Standards (COES) [Committee on Open Electronic Standards (COES) Report, DoD Open Systems-Joint Task Force (OS-JTF), July 1996] and tailored by the Joint Technical Architecture Development Group (JTADG).

## 1.5 JTA Relationship to DoD Standards Reform

The DoD Standards Reform was begun in June 1994 when the Secretary of Defense issued a memorandum entitled “Specifications and Standards—A New Way of Doing Business.” This memorandum directs that performance-based specifications and standards or nationally recognized private-sector standards be used in future acquisitions. The intent of this initiative is to eliminate non-value-added requirements, and thus reduce the cost of weapon systems and materiel, remove impediments to getting commercial state-of-the-art technology into weapon systems, and integrate the commercial and military-industrial bases to the greatest extent possible.

The JTA implements standards reform by selecting the minimum standards necessary to achieve joint interoperability. The JTA mandates commercial standards and practices to the maximum extent possible. Use of JTA-mandated standards or specifications in acquisition solicitations will not require a waiver from standards reform policies. All mandatory standards in the JTA are of the types that have been identified by the DoD Standards Reform as waiver-free or for which an exemption has already been obtained. Additional information on this topic can be found in Appendix E.

## 1.6 Standards Selection Criteria

The standards selection criteria used throughout the JTA focus on mandating only those items critical to interoperability that are based primarily on commercial open-system technology, are implementable, and have strong support in the commercial marketplace. Standards will only be mandated if they meet all of the following criteria:

- ☐ **Interoperability:** They enhance joint and potentially combined Service/Agency information exchange and support joint activities.
- ☐ **Maturity:** They are technically mature (strong support in the commercial marketplace) and stable.
- ☐ **Implementability:** They are technically implementable.
- ☐ **Public:** They are publicly available.
- ☐ **Consistent with Authoritative Source:** They are consistent with law, regulation, policy, and guidance documents.

The following preferences were used to select standards:

- ☐ Standards that are commercially supported in the marketplace with validated implementations available in multiple vendors’ mainstream commercial products took precedence.
- ☐ Publicly held standards were generally preferred.
- ☐ International or national industry standards were preferred over military or other Government standards.

Many standards have optional parts or parameters that can affect interoperability. In some cases, an individual standard may be further defined by a separate, authoritative document called a “profile” or a “profile of a standard,” which further refines the implementation of the original standard to ensure proper operation and assist interoperability.


The word “standards” as referred to in the JTA is a generic term for the collection of documents cited herein. An individual “standard” is a document that establishes uniform engineering and technical requirements for processes, procedures, practices, and methods. A standard may also establish requirements for selection, application, and design criteria of material. The standards cited in the JTA may include commercial, Federal, and military standards and specifications, and various other kinds of authoritative documents and publications.

## 1.7 Configuration Management


The JTA is configuration-managed by the Joint Technical Architecture Development Group (JTADG), under the direction of the DoD Technical Architecture Steering Group (TASG) and approved by the Architecture Coordination Council (ACC). These groups consist of members representing DoD and components of the Intelligence Community. The following organizations have voting memberships in the JTADG and TASG:

**Table 1-1: JTA Development Group (JTADG) Voting Membership**

JTA DEVELOPMENT GROUP (JTADG) VOTING MEMBERSHIP
Assistant Secretary of Defense(C3I)
Ballistic Missile Defense Organization (BMDO)
Defense Advanced Research Projects Agency (DARPA)
Defense Information Systems Agency (DISA)
Defense Intelligence Agency (DIA)
Defense Logistics Agency (DLA)
Defense Modeling and Simulation Office (DMSO)
Joint Staff/J6
National Imagery and Mapping Agency (NIMA)
National Reconnaissance Office (NRO)
National Security Agency (NSA)
Office of the Under Secretary of Defense (A&T) OSJTF
U.S. Air Force (USAF)
U.S. Army (USA)
U.S. Coast Guard (USCG)
U.S. Marine Corps (USMC)
U.S. Navy (USN)
U.S. Special Operations Command (USSOCOM)
U.S. Transportation Command (USTRANSCOM)

The JTA Management Plan describes the process by which the JTA will be configuration-managed. This document, as well as the charter for the JTADG, may be found on the Defense Information Systems Agency (DISA) Center for Information Technology Standards (CFITS) JTA Web home page: <http://www-jta.itsi.disa.mil>. 

Suggested changes to, or comments on, the JTA originating from DoD Components (Office of the Secretary of Defense [OSD], the Military Departments, the Organization of the Joint Chiefs of Staff [OJCS], the Unified and Specified Combatant Commands, and the Defense Agencies) should be submitted via the appropriate official JTA Component representative listed on the JTA Web home page. These representatives will integrate and coordinate received comments for submission as official DoD Component-sponsored comments.

Where a standard is [highlighted and underscored](#), it is hyperlinked to Appendix B. A “link” symbol () at the end of a citation for a standard indicates the hyperlink to the Web site where the standard can be obtained. Clicking on the “link” symbol will access the corresponding Web site.

Industry and other non-DoD comments and suggested changes should be submitted through DISA CFITS via electronic mail to: [jta-comment@www.disa.mil](mailto:jta-comment@www.disa.mil).

All change requests and suggested changes must be in the standard change request format described on the JTA Web home page.

Page intentionally left blank.

## **Section 2.1: Information-Technology Standards**

### **2.1.1 General**

#### **2.1.1.1 Purpose**

This section is intended as the basis from which to develop the main body of the JTA (i.e., the JTA Core). As the JTA evolves, the structure of this section will also evolve to be more reflective of the goal of the JTA structure.

#### **2.1.1.2 Scope**

This section of the JTA establishes the minimum set of rules governing information technology within DoD systems. The scope includes standards for information processing, information transfer, the structure of information and data, human-computer interface for information entry and display, and information-system security. Information technology includes any equipment or interconnected system or subsystem of equipment used in the automatic acquisition, storage, manipulation, management, movement, control, display, switching, interchange, transmission, or reception of data or information.

### **2.1.2 Background**

#### **2.1.2.1 DoD Technical Reference Model (DoD TRM)**

The DoD Technical Reference Model Version 1.0, 5 November 1999, and the core set of standards mandated in the JTA define the target technical environment for the acquisition, development, and support of DoD information technology. The purpose of the DoD TRM is to provide a common conceptual framework and define a common vocabulary so that the diverse components within DoD can better coordinate acquisition, development, and support of DoD information technology. Interoperability is dependent on the establishment of a common set of services and interfaces that system developers can use to resolve technical architectures and related issues. The DoD TRM structure is intended to reflect the separation of data from applications, and applications from the computing platform—a key principle in achieving open systems. The JTA has adapted the DoD TRM to serve as the framework for presenting JTA-mandated standards. The JTA's use of the DoD TRM ensures the use of consistent definitions between the services, domains, interfaces, and other elements needed to define architectural and design components. The model identifies service areas (i.e., set of capabilities grouped by functions) and their interfaces. The DoD TRM was chosen as the framework of the JTA because of the model's inherent support of open-system concepts. As illustrated in [Figure 2.1-1](#), the model is partitioned into the following: an Application Software Entity that includes both Mission Area and Support Applications; an Application Platform Entity that contains the system services (e.g., User Interface and Data Management services) and operating-system services; an External Environment; and a number of interfaces. The interfaces provide support for a wide range of applications and configurations and consist of the following: Application Program Interfaces (APIs) and External Environment Interfaces (EEIs).

The following JTA Core services are equivalent to their corresponding DoD TRM system services contained within the Application Platform Entity:

Software-Engineering Services

User Interface Services

Data Management Services

Data Interchange Services

Graphic Services

Communication Services

Internationalization Services

Security Services

System Management Services

Distributed-Computing Services

Operating-System Services

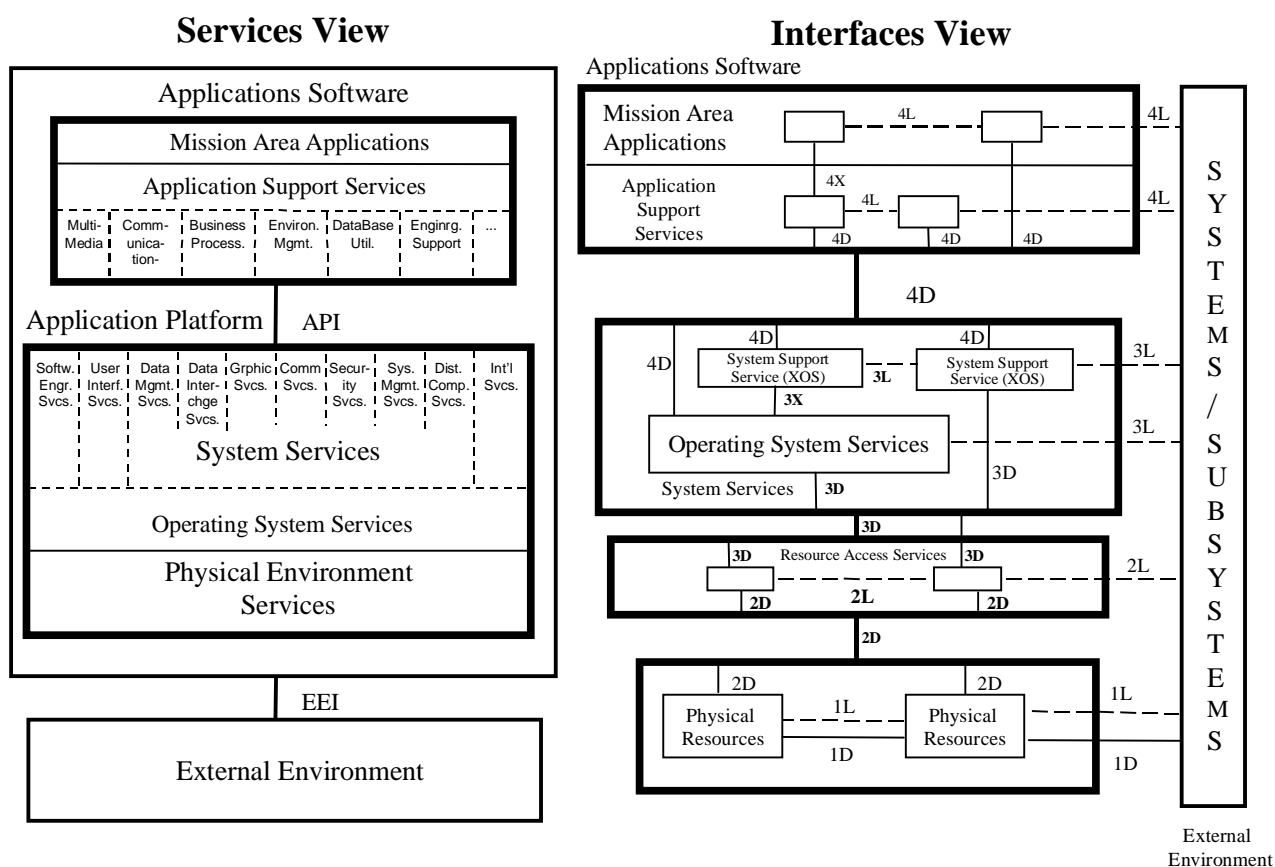


Figure 2.1-1: DoD Technical Reference Model (DoD TRM)



**Table 2.1-1: Interface Translation Table**

Interface Type	Definition
1D	Physical Resources–Direct
1L	Physical Resource–Logical
2D	Resources–Physical–Direct
2L	Resource Access–Logical
3D	System Service – Resource Access Direct
3L	System Service–Logical
3X	Operating System – Extended OS Direct
4D	Applications – System Services Direct
4L	Applications – Peer Logical
4X	Applications – Support Services Direct

The relationship between the sections in the JTA and the DoD TRM service areas are as follows:

[Section 2.2: Information-Processing Standards](#), specifies standards for the User Interface ([2.2.2.2.1.2](#)), Data Management ([2.2.2.2.1.3](#)), Data Interchange ([2.2.2.2.1.4](#)), Graphics ([2.2.2.2.1.5](#)), Communications ([2.2.2.2.1.6](#)), Operating System ([2.2.2.2.1.7](#)), Internationalization ([2.2.2.2.1.8](#)), and Distributed Computing ([2.2.2.2.1.11](#)) service areas, and the latter’s two subordinate paragraphs become [2.2.2.2.1.11.1](#) and [2.2.2.2.1.11.2](#) respectively. This section also references, but does not specify, any standards for the Software Engineering ([2.2.2.2.1.1](#)), Communications ([2.2.2.2.1.6](#)), Security ([2.2.2.2.1.9](#)), and System Management ([2.2.2.2.1.10](#)) service areas.

[Section 2.3: Information-Transfer Standards](#), specifies standards for the Communications ([2.3.2.1](#) through [2.3.2.3](#)) and System Management ([2.3.2.4](#)) service areas applicable to both system and network management.

[Section 2.4: Information-Modeling, Metadata, and Information-Exchange Standards](#), addresses standards for an area that is not currently elaborated, but is supported by engineering support, data management, and software engineering services in the DoD TRM.

[Section 2.5: Human-Computer Interface Standards](#), complements those cited for User Interface Services in [2.2.2.2.1.2 User Interface Services](#).

[Section 2.6: Information-Security Standards](#), specifies security standards that are relevant to the service areas discussed in Sections 2.2, 2.3, and 2.5.


At this time, the JTA does not include standards for all of the services identified in the TRM.

## **2.1.2.2 Policy Mandates**

### **2.1.2.2.1 Year 2000 Compliance**

To ensure proper data interchange beyond the year 2000, it is DoD policy that all new software and data acquired by DoD shall be Year 2000 (Y2K)-compliant. “Year 2000-compliant” means information technology that accurately processes date/time data (including, but not limited to, calculating, comparing, and sequencing) from, into, and between the 20<sup>th</sup> and 21<sup>st</sup> centuries, and

the years 1999 and 2000, and leap-year calculations. Furthermore, Year 2000-compliant information technology, when used in combination with other information technology, shall accurately process date/time data if the other information technology properly exchanges date/time data with it.<sup>1</sup> Refer to JTA Section 2.4 for guidance on specific date data formats to be used.

DoD policy guidance on this matter can be found in the “DoD Year 2000 Management Plan.” The plan is available on the Web at: <http://www.c3i.osd.mil/org/cio/y2k>.

Several systems and standards use windowing as a Year 2000 remediation technique. It is especially important to note that the ACP publication series will be using a pivot year of “05” forcing systems to use a 4-digit year by the year 2006. Otherwise, the year “06” will be interpreted as being 1906 rather than 2006

For procurement and acquisition purposes, the General Services Administration (GSA) has made available the following documents:

- ☐ “Recommended Year 2000 Contract Language” (1997-08-22).
- ☐ “Federal Acquisition Regulation Final Rule on the Year 2000” (1997-08-22), [FAR 39.002, 39.106], Vol.62, Number 163 [Rules & Regulations] [Pg. 44830].

These documents can be used by contracting officers to help ensure that acquired products and services are Y2K-compliant. They are available on the GSA Web site at:

<http://www.itpolicy.gsa.gov>.

#### **2.1.2.2.2 Defense Information Infrastructure Common Operating Environment**

The Common Operating Environment (COE) concept and levels of compliance are described in the Integration and Runtime Specification (I&RTS). The Defense Information Infrastructure COE (DII COE) is implemented with a set of modular software that provides generic functions or services, such as operating-system services. These services or functions are accessed by other software through standard APIs. The DII COE may be adapted and tailored to meet the specific requirements of a domain. COE implementations provide standard, modular software services consistent with the service areas identified in the DoD Technical Reference Model. Application programmers then have access to these software services through standardized APIs. The following standard is mandated:

- [Defense Information Infrastructure Common Operating Environment, Integration and Runtime Specification](#) (I&RTS), Version 3.1, 1 October 1998.

The DII COE, as defined in the DII COE I&RTS, is fundamental to a Joint System Architecture (JSA). In the absence of a JSA, the JTA mandates that at a minimum, all Command and Control (C2), Combat Support, and Intelligence Systems supporting the Joint Task Forces (JTFs) and Combatant Commands will use the DII COE. All applications of a system that must be integrated into a DII platform shall be at least DII COE I&RTS Level 5-compliant (software is segmented, uses DII COE Kernel, and is installed via COE tools) with a goal of achieving Level 8.

---

1. August 22, 1997 Interim FAR Rule on Year 2000 Compliance

Each DII COE version release contains products, which meet the operational requirements of the user community. These products are not necessarily fully compliant with JTA standards. However, the goal of the COE effort is to evolve to be fully compliant with the applicable JTA standards. Additionally, the DII COE does not contain functionality described in a number of JTA service areas. For these service areas, complying with the DII COE does not equate to compliance with the JTA. Additional services not contained in the DII COE must be met by complying with the applicable standards in the JTA. Each DII COE Component Software Requirement Specification (SRS) is being updated to include a profile of applicable JTA mandates.

### 2.1.3 Organization of Section 2

The Information Technology section of the JTA consists of six sections. The first section is the overview. The next sections are: (2.2) Information-Processing Standards; (2.3) Information-Transfer Standards; (2.4) Information-Modeling, Metadata, and Information-Exchange Standards; (2.5) Human-Computer Interface Standards; and (2.6) Information-Systems Security Standards.

- **Information-Processing Standards** – [Section 2.2](#) describes Government and commercial information processing standards DoD uses to develop integrated, interoperable systems that meet the warfighters' information-processing requirements.
- **Information-Transfer Standards** – [Section 2.3](#) describes the information-transfer standards and profiles that are essential for information-transfer interoperability and seamless communications. This section mandates the use of the open-systems standards used for the Internet and the Defense Information System Network (DISN).
- **Information-Modeling, Metadata, and Information-Exchange Standards** – [Section 2.4](#) describes the use of integrated information modeling and mandates applicable standards. Information modeling consists of Activity, Data, and Object Modeling. This section explains the use of the DoD Command and Control (C2) Core Data Model (C2CDM) and the Defense Data Dictionary System (DDDS), formerly the Defense Data Repository System (DDRS). This section also mandates information standards including message formats.
- **Human-Computer Interface Standards** – [Section 2.5](#) provides a common framework for Human-Computer Interface (HCI) design and implementation in DoD systems. The objective is the standardization of user interface implementation options, enabling DoD applications to appear and behave in a reasonably consistent manner. The section specifies HCI design guidance, mandates, and standards.
- **Information-Security Standards** – [Section 2.6](#) prescribes the standards and protocols to be used to satisfy security requirements. This section provides the mandated and emerging security standards that apply to JTA sections 2.2 through 2.5. Section 2.6 is structured to mirror the overall organization of the JTA so that readers can easily link security topics with the related JTA subject areas.

Page intentionally left blank.

## **Section 2.2: Information-Processing Standards**

### **2.2.1 Introduction**

#### **2.2.1.1 Purpose**

The purpose of this section is to specify the Joint Technical Architecture (JTA) Government and commercial information-processing standards DoD will use to develop integrated interoperable systems that directly or indirectly support the warfighter.

#### **2.2.1.2 Scope**

This section applies to mission-area, support application, and application platform service software. This section does not cover communications standards needed to transfer information between systems (defined in [Section 2.3](#)), nor standards relating to information modeling (process, data, and simulation), data elements, or military-unique message set formats (defined in [Section 2.4](#)).

#### **2.2.1.3 Background**

Information-Processing standards provide the data formats and instruction-processing specifications required to represent and manipulate data to meet information-technology (IT) mission needs. The standards in this section are drawn from widely accepted commercial standards that meet DoD requirements. Where necessary for interoperability, profiles of commercial standards are used. Military standards are mandated only when suitable commercial standards are not available.

### **2.2.2 Mandated Standards**

The following sections provide the applicable mandated standards that shall be used for the selection of commercial-off-the-shelf (COTS) or Government off-the-shelf (GOTS) software or in the development of Government software. [Appendix B: List of Mandated Standards and Sources](#), contains a table that summarizes the mandated standards from this section and provides information on how to obtain the standards.

#### **2.2.2.1 Application Software Entity**

The Application Software Entity is one part of DoD Technical Reference Model (TRM) that includes both mission-area applications and support applications. Mission-area applications implement specific users requirements and needs (e.g., personnel, material, management). This application software may be COTS, GOTS, custom-developed software, or a combination of these.

Common support applications (e.g., e-mail and word processing) are those that can be standardized across individual or multiple mission areas. The services they provide can be used to develop mission-area-specific applications or can be made available to the user. The DoD TRM defines six support application categories: Multimedia, Communications, Business Processing, Environment Management, Database Utilities, and Engineering Support. The definitions of these categories are found in the DoD Technical Reference Model, Version 1.0, 15 July 1999.

### 2.2.2.2 Application Platform Entity

The Application Platform Entity is the second layer of the DoD TRM, as shown in [Figure 2.1-1](#), and includes the common system services upon which required information-processing functionality is built. The Application Platform Entity is composed of 11 service areas. The corresponding mandates are provided in the following subsections.

#### 2.2.2.2.1 Service Areas

Eleven primary system services and operating systems services are defined within the Application Platform Entity: Software Engineering, User Interfaces, Data Management, Data Interchange, Graphics, Communications, Operating-System, Internationalization, Security, System Management, and Distributed-Computing Services.




##### 2.2.2.2.1.1 Software-Engineering Services

The software-engineering services provide system developers with the tools that are appropriate to the development and maintenance of applications. There are no mandated standards for this service area.

Language services provide the basic syntax and semantic definition for use by developers to describe the desired software function. “Programming language selections should be made in the context of the system and software engineering factors that influence overall life-cycle costs, risks, and potential for interoperability.”<sup>1</sup> Computer languages should be used in such a way as to minimize changes when compilers, operating systems, or hardware change. To maximize portability, the software should be structured where possible so it can be easily ported.











##### 2.2.2.2.1.2 User Interface Services

User Interface Services control how a user interfaces with an information-technology system. The Common Desktop Environment (CDE) provides a common set of desktop applications and management capabilities for environments similar to the Microsoft Windows desktop environment. CDE supports Open Software Foundation (OSF) Motif-based application execution. Both CDE and Motif applications use the underlying X-Window system. The Win32 Application Program Interface (API) set provides similar services for Microsoft Windows applications. Applications that require user interaction use either Motif/X-Window APIs and are capable of executing in the CDE or the applicable native windowing Win32 APIs. The following standards are mandated for use with Portable Operating System Interface (POSIX)-compliant operating systems running (or intended to run) POSIX-compliant applications:


- [C507](#), Window Management (X11R5): X-Window System Protocol, X/Open CAE Specification, April 1995. 
- [C508](#), Window Management (X11R5): Xlib – C Language Binding, X/Open CAE Specification, April 1995. 
- [C509](#), Window Management (X11R5): X Toolkit Intrinsics, X/Open CAE Specification, April 1995. 

---

1. Additional guidance may be found in the memorandum “Use of the Ada Programming Language” by ASD (C3I), April 29, 1997, DoD 5000.2-R, and DoDD 3405.1.

- [C510](#), Window Management (X11R5): File Formats & Application Conventions, X/Open CAE Specification, April 1995. 
- [M021](#): CDE 2.1/Motif 2.1 User's Guide, ISBN 1-85912-173-X, October 1997. 
- [M027](#): CDE 2.1/Motif 2.1 - Style Guide and Glossary, ISBN 1-85912-104-7, October 1997. 
- [M028](#): CDE 2.1/Motif 2.1 - Style Guide Certification Check List, ISBN 1-85912-109-8, October 1997. 
- [M029](#): CDE 2.1/Motif 2.1 - Style Guide Reference, ISBN 1-85912-114-4, October 1997. 
- [M213](#): Motif 2.1 - Programmer's Guide, ISBN 1-85912-134-9, October 1997. 
- [M214A](#): Motif 2.1 - Programmer's Reference, Volume 1, ISBN 1-85912-119-5, October 1997. 
- [M214B](#): Motif 2.1 - Programmer's Reference, Volume 2, ISBN 1-85912-124-1, October 1997. 
- [M214C](#): Motif 2.1 - Programmer's Reference, Volume 3, ISBN 1-85912-164-0 October 1997. 
- [M216](#): Motif 2.1 - Widget Writer's Guide, ISBN 1-85912-129-2, October 1997. 

The following standard is mandated for use with operating systems running (or intended to run) Win32 Applications:


- [Win32 APIs](#), Window Management and Graphics Device Interface, Volume 1 Microsoft Win32 Programmers Reference Manual, 1993 or later, Microsoft Press. 

Refer to [Section 2.5](#) for Human-Computer Interface (HCI) style guidance and standards.


#### **2.2.2.2.1.3 Data Management Services**

Central to most systems is the sharing of data between applications. The data management services provide for the independent management of data shared by multiple applications.

These services support the definition, storage, and retrieval of data elements from Database Management Systems (DBMSs). Application code using Relational Database Management System (RDBMS) resources and COTS RDBMSs conform to the requirements of Entry Level SQL. The following standard is mandated for any system using an RDBMS:

- [ISO/IEC 9075](#):1992 Information Technology – Database Language – SQL with amendment 1, 1996, as modified by FIPS PUB 127-2:1993, Database Language for Relational DBMSs. (Entry Level SQL). 

In addition, the SQL/Call Level Interface (CLI) addendum to the SQL standard provides a standard CLI between database application clients and database servers. The following API is mandated for both database application clients and database servers:

- [ISO/IEC 9075-3](#):1995 Information Technology – Database Languages – SQL – Part 3: Call-Level Interface (SQL/CLI). 

The ISO/IEC 9075-3 mandate does not preclude the use of Open Database Connectivity (ODBC) 3.0 or Java Database Connectivity (JDBC) extensions in situations where the capabilities supported by ISO/IEC 9075-3 cannot satisfy user-functional requirements. Note that ISO/IEC 9075-3 is a subset of ODBC 3.0.




#### 2.2.2.2.1.4 Data Interchange Services

The data interchange services provide specialized support for the exchange of data and information between applications and to and from the external environment. These services include document, graphics data, geospatial data, still-imagery data, motion-imagery data, multimedia data, product data, atmospheric data, oceanographic data, and time-of-day data.

##### 2.2.2.2.1.4.1 Document Interchange

The Standard Generalized Markup Language (SGML) format supports the production of documents intended for long-term storage and electronic dissemination for viewing in multiple formats. SGML formalizes document mark-up, making the document independent of the production and/or publishing system. SGML is an architecture-independent and application-independent language for managing document structures. SGML is a meta-language, providing the rules for designing and applying a system of markup tags rather than the specific set of tags. The following standard is mandated:

- [ISO 8879](#): 1986, Information processing – Text and office systems – Standard Generalized Markup Language (SGML) with Amendment 1, 1988. 

The Hypertext Markup Language (HTML) is used for hypertext-formatted and navigational-linked documents. For hypertext documents intended to be interchanged via the Web or made available via organizational intranets, the following standard is mandated:

- [HTML 4.0 Specification](#), W3C Recommendation, revised on 24-Apr-1998, REC-html40-19980424 <<http://www.w3.org/TR/1998/REC-html40-19980424>>.

The eXtensible Markup Language (XML) is a meta-language, based on SGML, for describing languages based on name-attribute tuples. This allows new capabilities to be defined and delivered dynamically. For domain- and application-specific markup languages defined through tagged data items, the following is a mandated standard:

- [Extensible Markup Language \(XML\) 1.0](#). W3C Recommendation, 10 February 1998. Reference: REC-xml-19980210, <<http://www.w3.org/TR/1998/REC-xml-19980210>>.

[Table 2.2-1](#) identifies file formats for the interchange of common document types such as text documents, spreadsheets, and presentation graphics. Some of these formats are controlled by individual vendors, but all of these formats are supported by products from multiple companies. In support of the standards mandated in this section, [Table 2.2-1](#) identifies conventions for file name extensions for documents of various types. If an organization has a requirement for a given document type, the following file formats are mandated, but not the specific products mentioned:

- ☐ All applications acquired or developed for the production of documents shall be capable of generating at least one of the formats listed in [Table 2.2-1](#) for the appropriate document type.
- ☐ The organization shall at a minimum be capable of reading and printing all of the formats listed above for the appropriate document type.



Notes: Compound documents contain embedded graphics, tables, and formatted text. OLE linking complicates document interchange. IRV is International Reference Version. Some special fonts, formatting, or features supported in the native file format may not convert accurately.

**Table 2.2-1: Common Document Interchange Formats**

Document Type	Standard/Vendor Format	Recommended File Name Extension	Reference
Plain Text	ASCII Text Format	.txt	ISO/IEC 646:1991 IRV
Compound Documents	Adobe PDF 3.0 Format HTML 4.0 Format MS Word 7.0 Format MS Word 6.0 Format Rich Text Format WordPerfect 5.2 Format	.pdf .htm .doc .doc .rtf .wp5	Vendor W3C Vendor Vendor Vendor Vendor
Briefing - Graphic Presentation	Freelance Graphics 2.1 Format MS PowerPoint 4.0 Format	.pre .ppt	Vendor Vendor
Spreadsheet	Lotus 1-2-3 Release 3.x Format MS Excel 5.0 Format	.wk3 .xls	Vendor Vendor
Database	dBASE 4.0 Format	.dbf	Vendor
Compression	GZIP file Format Zip file Format	.gz .zip	RFC 1952 Vendor
Computer Automated Design	AutoCad 14 Format	.dxf	Vendor

#### 2.2.2.2.1.4.2 Graphics Data Interchange

These services are supported by device-independent descriptions of the picture elements for vector and raster graphics. The International Organization for Standardization (ISO) Joint Photographic Expert Group (JPEG) standard describes several alternative algorithms for the representation and compression of raster images, particularly for imagery; JPEG images may be transferred using the JPEG File Interchange Format (JFIF). Graphics Interchange Format (GIF) and JFIF are de facto standards for exchanging graphics and images over an internet. GIF supports lossless compressed images with up to 256 colors and short animation segments. Note that Unisys owns a related patent, which requires a license for software that writes the GIF format. Portable Network Graphics (PNG) is an extensible file format for the lossless, portable, well-compressed storage of a raster image. Indexed-color, grayscale, and truecolour images are supported, plus an optional alpha channel for transparency. The PNG specification was issued as a W3C Recommendation on 1 October 1996.

For the interchange of very large still-raster images that have no geospatial context and where lossy decompression is acceptable, the mandated standard is:

- [JPEG File Interchange Format](#), Version 1.02, September 1, 1993, C-Cubed Microsystems.

For the interchange of other single raster images that have no geospatial context and where lossy compression is not acceptable, the mandated standard is:


- [PNG \(Portable Network Graphics\) Specification](#), W3C Recommendation REC-png.html <<http://www.w3.org/TR/REC-png>>.

For the lossless interchange of raster images that have no geospatial context and where none of the above cases apply, such as the exchange of still-images that can be viewed in sequence (also referred to as animation), the mandated standard is:

- [Graphics Interchange Format \(GIF\)](#), Version 89a, 31 July 1990, CompuServe Incorporated.

#### **2.2.2.2.1.4.3 Geospatial Data Interchange**

Geospatial services are also referred to as mapping, charting, and geodesy (MC&G) services. Raster Product Format (RPF) defines a common format for the interchange of raster-formatted digital geospatial data among DoD Components. Existing geospatial products that implement RPF include Compressed Arc Digitized Raster Graphics (CADRG), Controlled Image Base (CIB), and Digital Point Positioning Data Base (DPPDB). For raster-based products, the following standard is mandated:

- [MIL-STD-2411](#), Raster Product Format, 6 October 1994; with Notice of Change, Notice 1, 17 January 1995. 


Vector Product Format (VPF) defines a common format, structure, and organization for data objects in large geographic databases based on a georelational data model and intended for direct use. Existing geospatial products that implement VPF include Vector Map (VMap) Levels 0-2, Urban Vector Map (UVMaP), Digital Nautical Chart (DNC), Vector Product Interim Terrain Data (VITD), Digital Topographic Data (DTOP), and World Vector Shoreline Plus (WVS+). For vector-based products, the following standard is mandated:

- [MIL-STD-2407](#), Interface Standard for Vector Product Format (VPF), 28 June 1996. 

WGS 84, a Conventional Terrestrial Reference System (CTRS), is mandated for representation of a reference frame, reference ellipsoid, fundamental constants, and an Earth Gravitational Model with related geoid. Included in the Reference System are parameters for transferring to/from other geodetic datums. The National Imagery and Mapping Agency (NIMA) Technical Report (TR) 8350.2, Third Edition DoD World Geodetic System 1984, Its Definition and Relationships with Local Geodetic Systems, 4 July 1997, defines the technical content of WGS 84. WGS 84 will be used for all joint operations and is recommended for use in multinational and unilateral operations after coordination with allied commands. The following standard is mandated:

- [MIL-STD-2401](#), Department of Defense World Geodetic System (WGS84), 11 January 1994. 






FIPS PUB 10-4 provides a list of the basic geopolitical entities in the world, together with the principal administrative divisions that comprise each entity. For applications involving the interchange of geospatial information requiring the use of country codes, the following standard is mandated:

- [FIPS PUB 10-4](#), Countries, Dependencies, Areas of Special Sovereignty, and Their Principal Administrative Divisions, April 1995. 

Additional information on other geospatial services not identified in the mandated standards is available in NIMAL 805-1A, NIMA GGI&S List of Products and Services, January 1997.

#### 2.2.2.2.1.4.4 Still-Imagery Data Interchange

The National Imagery Transmission Format Standard (NITFS) is a DoD and Federal Intelligence Community suite of standards for the exchange, storage, and transmission of digital-imagery products and image-related products. NITFS provides a package containing information about the image, the image itself, and optional overlay graphics. The standard provides a “package” containing an image(s), subimages, symbols, labels, and text as well as other information related to the image(s). NITFS supports the dissemination of secondary digital imagery from overhead collection platforms. Guidance on applying the suite of standards composing NITFS can be found in MIL-HDBK-1300A. The following standards are mandated for imagery product dissemination:

- [MIL-STD-2500B](#), National Imagery Transmission Format (Version 2.1) for the National Imagery Transmission Format Standard, 22 August 1997 with Notice 1, 2 October 1998. An additional document, titled “CHANGE SUMMARY NITF2.0 to NITF2.1,” 28 Jan 97, describes the changes and additions (including the Y2K fix) made to this standard. 
- [MIL-STD-188-196](#), Bi-Level Image Compression for the National Imagery Transmission Format Standard, 18 June 1993 with Notice 1, 27 June 1996. 
- [MIL-STD-188-199](#), Vector Quantization Decompression for the National Imagery Transmission Format Standard, 27 June 1994 with Notice 1, 27 June 1996. 
- [ISO/IEC 8632:1992](#) Computer Graphics Metafile (CGM) for the Storage and Transfer of Picture Description Information, as profiled by MIL-STD-2301A, Computer Graphics Metafile (CGM) Implementation Standard for the National Imagery Transmission Format Standard, 5 June 1998. 
- [ISO/IEC 10918-1:1994](#), Joint Photographic Experts Group (JPEG) as profiled by MIL-STD-188-198A, Joint Photographic Experts Group (JPEG) Image Compression for the National Imagery Transmission Format Standard, 15 December 1993 with Notice 1, 12 October 1994 and Notice 2, 14 March 1997. Although the NITFS uses the same ISO JPEG algorithm as mandated in [Section 2.2.2.2.1.4.2](#), the NITFS file format is not interchangeable with the JFIF file format. 

Communication protocols for the transmission of imagery over point-to-point tactical data links in high Bit Error Rate (BER), disadvantaged communications environments are specified in [Section 2.3.2.1.4](#).

#### 2.2.2.2.1.4.5 Motion-Imagery Data Interchange

Motion Imagery (MI) is defined as imaging sensors/systems that generate/process sequential or continuous streaming images at specified temporal rates (normally expressed as Frames Per Second [FPS]) within a common field of regard. Motion Imagery defines temporal domains of 1 Hz or higher, and still imagery defines temporal domains of less than 1 Hz.

##### 2.2.2.2.1.4.5.1 Video Systems

Video systems, defined as electro-optical motion imagery whose formats are governed by national and international standards, are divided into four categories:

- ☐ Video Imagery Systems, which create, transmit, edit, store, archive or disseminate digital video for real-time, near-real-time or for other end-user product distribution, usually in support of Intelligence, Surveillance, and Reconnaissance (ISR) activities.

- Video Teleconference Systems, which provide real-time visual interchange between remote locations typically in support of meetings. When video teleconference systems are used for the display of Video Imagery, the standards in the Video Imagery section apply.
- Video Telemedicine Systems, which, provide real-time visual interchange between remote locations in biomedical applications including fiber-optic and video teleconferencing.
- Video Support Systems, which enable end-user applications associated with video-based training news gathering, or other non-critical functions that do not directly support the warfighter. This includes traditional studio and field video productions not associated with DoD warfighter operations.

The standards and use directives for each class of video system are noted in the following sections:




#### **2.2.2.2.1.4.5.1.1 Video Imagery**

The “DoD/IC/USIGS Video Imagery Standards Profile (VISP),” Version 1.4, 8 June 1999, describes a minimum set of standards and guidelines for the acquisition of systems that produce, use, or exchange video imagery information.



For video-imagery distribution and compression, ITU-R BT.601-4 Component (4:2:2) shall be used for baseband (uncompressed) video signal waveforms and for the transitional sampling structure, compressing conversions, and processing of standard definition digital video. The following standard, as profiled in the VISP 1.4, Chapter 2, is mandated:

- [ITU-R BT.601-4](#), Encoding Parameters of Digital Television for Studios, 1994. 


ISO/IEC 13818, commonly known as MPEG-2, supports the compression profile for both standard and high-definition compression video imagery. MPEG-2, 4:2:2 Profile @ Main Level” (4:2:2 P @ ML) supports standard-definition video compression and “MPEG-2, 4:2:2 Profile @ High Level” (4:2:2 P @ HL) supports high-definition video compression for both implementations when origination, acquisition, production, manipulation, exploitation, distribution, and archiving and where further image processing is anticipated. “MPEG-2, 4:2:0 Main Profile @ Main Level” (MP @ ML) supports standard-definition video compression and “MPEG-2, 4:2:0 Main Profile @ High Level” (MP @ HL) supports high-definition video compression for end-user video product distribution, including real-time wide-area transmissions, and where bandwidth limitations preclude use of 4:2:2 P. The following standards, as profiled in the VISP 1.4, Chapter 2 are mandated:

- [ISO/IEC 13818-1](#): 1996 Information Technology – Generic Coding of Moving Pictures and Associated Audio Information – Part 1: Systems (MPEG-2); 1996, with Amendment 1:1997. 
- [ISO/IEC 13818-2](#): 1996 Information Technology – Generic Coding of Moving Pictures and Associated Audio Information – Part 2: Video (MPEG-2); 1996, with Amendment 1:1997 and Amendment 2:1997. 
- [ISO/IEC 13818-4](#): 1996 Information Technology – Generic Coding of Moving Pictures and Associated Audio Information – Part 4: Conformance testing; 1996. 


ANSI/SMPTE 12M, commonly known as Society and Motion Picture and Television Engineers (SMPTE) time code, shall be the standard for time annotation and embedded time references for video systems. Furthermore, within 12M, Vertical Interval Time Code (VITC), Drop Frame shall be used for 29.97 FPS systems, Non-Drop Frame Time Code shall be used for 24, 25, 30, 50, and 60 FPS systems. Note: Analog NTSC systems are based on 29.97 FPS. The following standard, as profiled in the VISP 1.4, Chapter 2, is mandated:

- [ANSI/SMPTE 12M-1998](#), Time and Control Code for Video and Audio Tape for 525 Line/60 Field Television Systems. 
- [ANSI/SMPTE 309M-1998](#), Transmission of Date and Time Zone Information in Binary Groups of Time and Control Code. 


For video imagery interconnection and processing, ANSI/SMPTE 259M (4:2:2) standard definition (270-360 Mbps Serial Digital Interface – SDI), using ITU-R BT.601-4 Component (4:2:2) digital video waveforms, shall be the uncompressed baseband signal transport and processing standard for standard-definition digital video, audio and metadata origination, system interface, production/analysis center processing and manipulation. ANSI/SMPTE 259M will also be used as the video input/output protocol for standard-definition digital videotape recorders, digital video servers, and other similar systems. The following standard, as profiled in the VISP 1.4, Chapter 2, is mandated:

- [ANSI/SMPTE 259M-1997](#), Television - 10 bit 4:2:2 Component (Serial Digital Interface). 


ANSI/SMPTE 292M (1.5 Gb/s Bit-Serial Interface) shall be the uncompressed baseband signal transport and processing standard for high-definition digital video, audio and metadata origination, system interface, production/analysis center processing and manipulation as well as bit-serial interface. The following standard is mandated:

- [ANSI/SMPTE 292M-1998](#), Television – Bit-Serial Digital Interface for High-Definition Television Systems. 


ANSI/SMPTE 293M-1996 supports video sampling structure for progressively scanned digital standard-definition video systems. The following standard, as profiled in the VISP 1.4, Chapter 2, is mandated:

- [ANSI/SMPTE 293M-1996](#), Television – 720 x 483 Active Line at 59.94-Hz Progressive Scan Production – Digital Representation. 

ANSI/SMPTE 296M supports video sampling structure for progressively scanned digital high-definition systems based on 720 vertical scanning lines. The following standard, as profiled in the VISP 1.4, Chapter 2, is mandated:

- [ANSI/SMPTE 296M-1997](#), Television – 1270 x 720 Scanning, Analog and Digital Representation and Analog Interface. 

ANSI/SMPTE 274M supports the video sampling structures for progressively scanned digital high-definition systems based on 1080 vertical scanning lines. The progressive scan elements of the following standard are mandated:

- [ANSI/SMPTE 274M-1995](#), Television – 1920 x 1080 Scanning and Interface. 

The standards for Video Imagery section do not completely define an architecture for interoperability for low bandwidth (below 1.5 Mbps) real-time streaming applications. Standards for such low-bandwidth applications are actively under development. Until such standards are available, users may use “MPEG-1” or “MPEG-2 4:2:0 MP@ML Adaptive Field Frame” standards for low-bandwidth video applications. DoD users who adopt proprietary video compression systems for very low bandwidth applications are cautioned that such systems are generally not supported within DoD and that the interoperability of such systems is not ensured.

#### **2.2.2.2.1.4.5.1.2 Video Teleconference**



Video Teleconferencing (VTC) standards are specified in [Section 2.3.2.1.2](#).

#### **2.2.2.2.1.4.5.1.3 Video Telemedicine**



Video Telemedicine System interchange standards will be addressed in a later version of the JTA.

#### **2.2.2.2.1.4.5.1.4 Video Support**

MPEG-1 is an open international standard for video compression that has been optimized for single- and double-speed CD-ROM data transfer rates. The standard defines a bit-stream representation for synchronized digital video and audio, compressed to fit into a bandwidth of 1.5 Mbps. This corresponds to the data retrieval speed from CD-ROM and Digital Audio Tape (DAT). With 30 FPS video at a display resolution of 352 x 240 pixels, the quality of compressed and decompressed video at this data rate is often described as similar to that of a VHS recording. A major application of MPEG is the storage of audiovisual information on CD-ROM and DAT. MPEG is also gaining ground on the Internet as an interchange standard for video clips because the shell format is interoperable across platforms and considered to be platform-independent. The following standards are mandated:

- [ISO/IEC 11172-1: 1993](#), Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbits/s – Part 1: Systems, 1993; with Technical Corrigendum 1:1995. 
- [ISO/IEC 11172-2: 1993](#), Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbit/s – Part 2 Video; 1993. 



MPEG-2 Main Profile @ Main Level (MP@ML) 4:2:0 systems are fully backward-compatible with the MPEG-1 standard. MPEG-2 MP@ML can be used with all video support systems (storage, broadcast, network) at bit rates from 3 to 10 Mbps, where limited additional processing is anticipated, operating in either progressive or interlaced scan mode, optimally handling the resolution of the ITU-R 601 recommendation (i.e., 720 x 480 pixels for the luminance signal and 360 x 480 pixels for the color space). The following video support standards for compressed video are mandated:

- [ISO/IEC 13818-1: 1996](#), Information Technology – Generic Coding of Moving Pictures and Associated Audio Information – Part 1: Systems (MPEG-2); 1996, with Amendment 1:1997). 
- [ISO/IEC 13818-2: 1996](#) – Generic Coding of Moving Pictures and Associated Audio Information – Part 2: Video (MPEG-2); 1996, with Amendment 1:1997 and Amendment 2:1997. (The identical text is also published as ITU-T Rec. H.262). 



#### 2.2.2.2.1.4.6 Audio Data Interchange

Effective compression of audio data depends not only upon data compression techniques but also upon the application of a psycho-acoustic model that predicts which sounds humans are likely to be able to hear or not hear in given situations. The sounds selected for elimination depend on the bit rate available for streaming the audio data when the file is decoded and played. Therefore, the best selection of a file format depends upon the bandwidth assumed to be available on the platform that will decode the file. For audio files intended to be decoded in an environment with a target bit rate of about 56 to 64 kilobits per second (Kbps) per audio channel, the following standards are mandated.

- [ISO/IEC 11172-1](#): 1993 Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbit/s – Part 1: Systems, 1993; with Technical Corrigendum 1:1995. 
- [ISO/IEC 11172-3](#): 1993, Information technology – Encoding of moving pictures and associated audio for digital storage media at up to about 1.5 Megabits per second (Mbit/s) – Part 3 (Audio Layer-3 only); with Technical Corrigendum 1:1996. 

#### 2.2.2.2.1.4.6.1 Audio Associated with Video

The classes of audio in support of video have been subdivided into four categories:


- ☐ **Audio for Video Imagery Systems**, which create, transmit, edit, store, archive, or disseminate audio for real-time, near-real-time, and other end-user product distribution, usually in support of Intelligence, Surveillance, and Reconnaissance (ISR) activities.
- ☐ **Audio for Video Teleconference Systems**, which provide real-time verbal interchange between remote locations, typically in support of meetings. When video teleconference systems are used for the display of Video Imagery, the standards in the Audio for Video Imagery section apply.
- ☐ **Audio for Video Telemedicine Systems**, which provide real-time visual interchange between remote locations in support of biomedical applications including fiber-optic and video teleconferencing.
- ☐ **Audio for Video Support Systems**, which enable end-user applications associated with video/audio-based training, news gathering, or other non-critical functions that do not directly support the warfighter. This includes traditional studio and field productions not associated with DoD warfighting operations.

The standards and use directives for each category of audio application are given in the following sections.

##### 2.2.2.2.1.4.6.1.1 Audio for Video Imagery

For audio systems associated with Video Imagery applications, the audio sub-sections of the “USIGS Video Imagery Standards Profile (VISP),” Version 1.4, 8 June 1999, apply. The following standards are mandated:

- [ANSI S4.40-1992/AES3-1992](#), AES (Audio Engineering Society) Recommended Practice for Digital Audio Engineering - Serial transmission format for two-channel linearly represented digital audio data, 1992 (reaffirmed and amended 1997).

- [ISO/IEC 13818-3:1995](#), Information technology - Generic coding of moving pictures and associated audio information, with Amendment 1:1996. Used for compressed digital audio systems, MPEG-2 Part 3: Audio. 

#### **2.2.2.2.1.4.6.1.2 Audio for Video Teleconference**


Video Teleconferencing (VTC) standards are specified in [Section 2.3.2.1.2](#).

#### **2.2.2.2.1.4.6.1.3 Audio for Video Telemedicine**

Audio for Video Telemedicine system interchange standards will be addressed in a later version of the JTA.

#### **2.2.2.2.1.4.6.1.4 Audio for Video Support**

Effective compression of audio data depends not only upon data compression techniques but also upon the application of a psycho-acoustic model that predicts which sounds humans are likely to be able to hear or not hear in given situations. The sounds selected for elimination depend on the bit rate available for streaming the audio data when the file is decoded and played. Therefore, the best selection of a file format depends upon the bandwidth assumed to be available on the platform that will decode the file. For audio files intended to be decoded in an environment with a target bit rate of about 56 to 64 Kbps per audio channel, the following standard is mandated:


- [ISO/IEC 11172-3: 1993](#), Information technology - Encoding of moving pictures and associated audio for digital storage media at up to about 1.5 Megabits per second (Mbit/s) - Part 3 (Audio Layer-3 only); with Technical Corrigendum 1:1996. 

#### **2.2.2.2.1.4.6.2 Audio Not Associated with Video Systems**

Formats for the exchange of stand-alone audio will be addressed in a later version of the JTA.

#### **2.2.2.2.1.4.7 Data Interchange Storage Media**

MIL-HDBK-9660B, 1 September 1997, provides additional guidance in the use of Compact Disc-Read Only Memory (CD-ROM) technology. In cases where CD-ROM/CD-RW media is used, the following file system format (at a minimum) is mandated:

- [ISO 9660:1988](#), Information processing – Volume and file structure of CD-ROM for information interchange. 


Additional standards used for the exchange of multimedia data can be found in [Section 2.3.2.1.2](#).

#### **2.2.2.2.1.4.8 Atmospheric and Oceanographic Data Interchange**


The following formats are established by the World Meteorological Organization (WMO) Commission for Basic Systems (CBS) for atmospheric and oceanographic data. The WMO Format for the Storage of Weather Product Information and the Exchange of Weather Product Messages in Gridded Binary (GRIB) Form was developed for the transfer of gridded data fields, including spectral model coefficients, and of satellite images. A GRIB record (message) contains values at grid points of an array, or a set of spectral coefficients, for a parameter at a single level or layer as a continuous bit stream. It is an efficient vehicle for transmitting large volumes of gridded data to



automated centers over high-speed telecommunication lines using modern protocols. It can serve as a data storage format. While GRIB can use predefined grids, provisions have been made for a grid to be defined within the message. The following standard is mandated:


- [FM 92-X Ext. GRIB WMO No. 306](#), Manual on Codes, International Codes, Volume 1.2 (Annex II to WMO Technical Regulations) Parts B and C. 

The WMO Binary Universal Format for Representation (BUFR) is used for interchange of atmospheric and oceanographic data. Besides being used for the transfer of data, BUFR is used as an online storage format and as a data-archiving format. A BUFR record (message) containing observational data of any sort also contains a complete description of what those data are: the description includes identifying the parameter in question (height, temperature, pressure, latitude, date, and time); the units (any decimal scaling that may have been employed to change the precision from that of the original units); data compression that may have been applied for efficiency; and the number of binary bits used to contain the numeric value of the observation. BUFR is a purely binary or bit-oriented form. The following standard is mandated:

- [FM 94-X Ext. BUFR WMO No. 306](#), Manual on Codes, International Codes, Volume 1.2 (Annex II to WMO Technical Regulations) Parts B and C. 

#### **2.2.2.2.1.4.9 Time-of-Day Data Interchange**



Coordinated Universal Time (UTC), traceable to UTC (USNO) maintained by the U.S. Naval Observatory (USNO), shall be used for time-of-day information exchanged among DoD systems. Time-of-day information is exchanged for numerous purposes including time-stamping events, determining ordering, and synchronizing clocks. Traceability to UTC (USNO) may be achieved by various means depending on system-specific accuracy requirements. These means may range from a direct reference via a GPS time code receiver to a manual interface involving an operator, wristwatch, and telephone-based time service. The UTC definition contained in the following standard, traceable to UTC (USNO), is mandated:

- [ITU-R Recommendation TF.460-4](#), Standard-frequency and Time-signal Emissions, International Telecommunications Union, July 1986. 

Note that the Global Positioning System (GPS) provides time-of-day information traceable to UTC (USNO). Also, note that leap seconds are inserted or deleted when necessary in UTC to keep the time-of-day system synchronized with the Earth's rotation. See Paragraph [2.3.2.1.5](#) for a GPS discussion, required standards, and guidelines.

#### **2.2.2.2.1.5 Graphic Services**

These services support the creation and manipulation of graphics. The following standards are mandated for non-COTS graphics development:

- [ANSI/ISO/IEC 9636-1,2,3,4,5,6:1991 \(R1997\)](#), Information Technology Computer Graphics Interfacing (CGI) Techniques for Dialogue with Graphics Devices. 
- [OpenGL Graphics System](#): A Specification (Version 1.1) 25 June 1996 (for three-dimensional graphics). 

#### 2.2.2.2.1.6 Communications Services

These services support the distributed applications that require data access and applications interoperability in networked environments. The mandated standards are provided in [Section 2.3](#).






#### 2.2.2.2.1.7 Operating-System Services

These core services are necessary to operate and administer a computer platform and to support the operation of application software. They include kernel operations, shell, and utilities. The operating system controls access to information and the underlying hardware. These services shall be accessed by applications through either the standard Portable Operating System Interface (POSIX) or Win32 APIs.

When requiring real-time operating systems, the IEEE 1003.13:1998 Standardized Application Environment Profile – POSIX Realtime Application Support standard should be considered for use. It has been designed to satisfy a wide range of real-time system requirements based upon the Application Platform's size and function. It identifies four real-time application environment profiles based on the ISO/IEC 9945-1 series of standards including: Minimal Realtime System Profile (PSE51), Realtime Controller System Profile (PSE52), Dedicated Realtime System Profile (PSE53), and Multi-Purpose Realtime System Profile (PSE54).


Not all operating-system services are required to be implemented, but those that are used shall comply with the standards listed below. The following standards are mandated:

Note: References to “C language” and “Ada language” are part of the formal titles of some standards in this section, denoting the language used to define the standard. The following standards are mandated for use with POSIX-compliant operating systems running (or intended to run) POSIX-compliant applications:

- [ISO/IEC 9945-1:1996](#), Information Technology - Portable Operating System Interface (POSIX) - Part 1: System Application Program Interface (API) [C language] (Mandated Services). 
- [ISO/IEC 9945-1:1996](#), (Real-time Extensions) to ISO/IEC 9945-1:1996, Information Technology - Portable Operating System Interface (POSIX) - Part 1: System Application Program Interface (API) [C language] (Real-time Optional Services). 
- [ISO/IEC 9945-1:1996](#), (Thread Extensions) to ISO/IEC 9945-1:1996, Information Technology - Portable Operating System Interface (POSIX) - Part 1: System Application Program Interface (API) [C language] (Thread Optional Services). 
- [ISO/IEC 9945-2:1993](#), Information Technology Portable Operating System Interface (POSIX) - Part 2: Shell and Utilities, as profiled by FIPS PUB 189:1994, Information Technology - Portable Operating System Interface (POSIX) - Recommendations (Section 12) and Implementation Guidance (Section 13). 
- [IEEE 1003.2d:1994](#), POSIX - Part 2: Shell and Utilities - Amendment: Batch Environment. 
- [ISO/IEC 14519:1999](#), Information Technology – POSIX Ada Language Interfaces – Binding for System Application Program Interface (API) – Realtime Extensions.
- [IEEE 1003.5g:1999](#), IEEE Standard for Information Technology – POSIX Ada Language Interfaces – Part 1: Binding for System Application Program Interface (API) – Amendment g: Realtime Extensions.
- [IEEE 1003.13](#): IEEE Standard for Information Technology – Standardization Applications Environment Profile – POSIX Realtime Application Program Interface (API)

- [IEEE 1003.5b](#):1996, IEEE Standard for Information Technology – POSIX Ada Language Interfaces – Part 1: Binding for System Application Programming Interface (API) – Amendment 1: Realtime Extensions (Incorporates 1003.5:1992)



The following standard is mandated for use with operating systems running (or intended to run) Win32 applications:

- [Win32 APIs](#), Window Management and Graphics Device Interface, Volume 1 Microsoft Win32 Programmers Reference Manual, 1993 or later, Microsoft Press. 

#### **2.2.2.2.1.8 Internationalization Services**

The internationalization services provide a set of services and interfaces that allow a user to define, select, and change between different culturally related application environments supported by the particular implementation. These services include character sets, data representation, cultural convention, and native-language support.

In order to interchange text information between systems, it is fundamental that systems agree on the character representation of textual data. The following character set coding standards, which build upon the ASCII character set, are mandated for the interchange of 8-bit and 16-bit textual information respectively:

- [ANSI/ISO 8859-1:1987](#), Information Processing - 8-Bit Single Byte Coded Graphic Character Sets - Part 1: Latin Alphabet No. 1. 
- [ISO/IEC 10646-1:1993](#), Information Technology - Universal Multiple-Octet Coded Character Set (UCS) - Part 1: Architecture and Basic Multilingual Plane with Technical Corrigendum 1:1996. 

#### **2.2.2.2.1.9 Security Services**

These services assist in protecting information and computer platform resources. They must often be combined with security procedures, which are beyond the scope of the information-technology service areas, to fully meet security requirements. Security services include security policy, accountability, and assurance. (Note: Security Service standards have been consolidated in [Section 2.6](#))

#### **2.2.2.2.1.10 System Management Services**





These services provide capabilities to manage an operating platform and its resources and users. System management services include configuration management, network management, fault management, and performance management.

#### **2.2.2.2.1.11 Distributed-Computing Services**

These services allow various tasks, operations, and information transfers to occur on multiple physically or logically dispersed computer platforms. These services include, but are not limited to: global time; data, file, and name services; thread services; and remote-process services. There are two categories of Distributed-Computing Services: Remote-Procedure Computing and Distributed-Object Computing.

### 2.2.2.2.1.11.1 Remote-Procedure Computing

The mandated standards for remote-procedure computing are identified in the Open Group Distributed Computing Environment (DCE) Version 1.1. The mandated standards are:

- [C310, DCE 1.1](#): Time Services Specification, X/Open CAE Specification, November 1994. 
- [C311, DCE 1.1](#): Authentication and Security Services, Open Group CAE Specification, August 1997. 
- [C705, DCE 1.1](#): Directory Services, Open Group CAE Specification, August 1997. 
- [C706, DCE 1.1](#): Remote Procedure Call, Open Group CAE Specification, August 1997. 


The C311 specification is included here to provide the complete definition of the DCE. Section 2.6, Information-Systems Security Standards, specifies the other security requirements that must be met.

When used in conjunction with the POSIX Threads Extensions, the recommendations of the Open Group's Single UNIX Specification Version 2 – 6 Vol Set for UNIX 98 are expected to integrate the DCE thread model with the POSIX thread model.


### 2.2.2.2.1.11.2 Distributed-Object Computing





The mandate for distributed-object computing is interworking with the Object Management Group (OMG) Object Management Architecture (OMA), composed of the Common Object Request Broker Architecture (CORBA), CORBAservices, and CORBAfacilities. The CORBA specification defines the interfaces and services for Object Request Brokers, including an Interface Definition Language (IDL) and the Internet Inter-ORB Protocol (IIOP). CORBAservices define interfaces and semantics for services required to support distributed objects, such as naming, security, transactions, and events. CORBAfacilities defines interfaces and semantics for services required to support functions such as compound document manipulation. Interworking is the exchange of meaningful information between computing elements (semantic integration). Application-Level Interworking, for CORBA, results in CORBA clients interacting with non-CORBA servers and non-CORBA clients interacting with CORBA servers. For OLE/COM, Application-Level Interworking results in COM/OLE clients interacting with non-COM/OLE servers and non-COM/OLE clients interacting with COM/OLE servers.

The CORBA interoperability mandate does not preclude the use of other distributed-object technologies, such as ActiveX/DCOM or Java, as long as the capability for interworking with CORBA applications and objects is maintained by the non-CORBA system. Products are available that allow interworking among distributed-object techniques. Interworking with the following specification is mandated:

- [OMG document formal/98-12-01](#), Common Object Request Broker: Architecture and Specification, Version 2.3, June 1999. 

When a CORBA Object Request Broker (ORB) is used, the following specifications are mandated:



- [OMG document formal/97-12-10](#), CORBAservices Naming Service Specification, March 1995. 

- [OMG document formal/97-12-11](#), CORBAServices Event Service Specification, March 1995. 
- [OMG document formal/97-12-17](#), CORBAServices Transaction Service Specification, November 1997. 
- [OMG document formal/97-12-21](#), CORBAServices Time Service Specification, July 1997. 
- [OMG document formal/97-12-23](#), CORBAServices Trading Object Service Specification, March 1997. 

For DCE users that need to interwork with CORBA, the following standard is mandated:

- [OMG document orbos/98-06-01](#), CORBAServices DCE/CORBA Interworking Service. 

For COM users that need to interwork with CORBA, the following standards are mandated:

- [OMG document orbos/97-09-06](#), COM/CORBA Part B, Interworking, November 19, 1997. 
- [OMG document orbos/97-09-07](#), COM/CORBA Part A Revision November 19, 1997. 

### 2.2.3 Emerging Standards

Emerging standards are expected to be elevated to mandatory status when implementations of the standards mature and the standards meet all criteria in [Section 1.6](#).

#### 2.2.3.1 Data Management


The emerging SQL3 specification contains a number of data abstraction facilities, including user-defined data types and methods. The emerging SQL3 specification also contains facilities for defining and referencing object identifiers. Lastly, the emerging SQL3 specification supports knowledge-based data management and remote data access capabilities. The following SQL3 standards are emerging:

- [ISO/IEC DIS 9075-1](#) Information technology – Database languages – SQL – Part 1: Framework (SQL/Framework).
- [ISO/IEC DIS 9075-2](#) Information technology – Database languages – SQL – Part 2: Foundation (SQL/Foundation).
- [ISO/IEC DIS 9075-3](#) Information technology – Database languages – SQL – Part 3: Call-Level Interface (for SQL3).
- [ISO/IEC DIS 9075-4](#) Information technology – Database languages – SQL – Part 4: Persistent Stored Modules (SQL/PSM).
- [ISO/IEC DIS 9075-5](#) Information technology – Database languages – SQL – Part 5: Host Language Bindings (SQL/Bindings).
- [ISO/IEC DIS 9075-10](#) Information technology – Database languages – SQL – Part 10: Object Language Bindings (SQL/OLB).

SQL Multimedia (SQL/MM) is a set of extensions to the SQL3 specification and will specify packages of SQL abstract data type (ADT) definitions using the facilities for ADT specification and invocation provided in the SQL3 specification. SQL/MM intends to standardize class libraries for science and engineering; full-text and document processing; and methods for the management of multimedia objects such as image, sound, animation, music, and video. The emerging standard for SQL/MM is:

- [ISO/IEC DIS 13249-3](#) Information technology – Database languages – SQL Multimedia and Application Packages – Part 3: Spatial.

The SQL - RDA standard specifies a message format for remote communication of SQL database language statements (query and update) to a remote database. The specification defines uses of the message fields and other implementation information including sequencing and how SQL statements map to the Remote Database Access (RDA) protocol, a TCP/IP-compatible communications protocol that enables a database client to gain access to database servers. The emerging standard for SQL - RDA is:

- [ISO/IEC 9579:1999](#) Information technology – Remote Database Access for SQL. 

The Object Database Management Group (ODMG) has published a second version of their standard for an Object Storage API that can work with any DBMS or tool. The ODMG has defined a comprehensive object model, added a meta-object interface, defined an object interchange format, and worked to make the programming language bindings consistent with the ODMG model. The ODMG specification is published as a hard-cover book. The following standard is emerging:

- [The Object Database Standard: ODMG 2.0](#), Edited by R.G.G. Cattell et al. The Morgan Kaufmann Series in Data Management, 1997, ISBN 1-55860-463-4.


## 2.2.3.2 Data Interchange

### 2.2.3.2.1 Document Interchange

The next generation of HTML (currently known as XHTML) will not be independent as it is now, but will be built into XML so that a single XML data stream can be used by variety of applications, each of which might have different display characteristics associated with it. Thus, the same XML data stream can be interpreted and appropriately displayed on a variety of devices, such as a cellular telephone, a hand-held computer, a lap-top computer, a Web-enabled television, and an embedded application simply by processing the appropriate XHTML tags in the XML data stream. This emerging standard is:

- [XHTML™ 1.0: The Extensible HyperText Markup Language](#): A Reformulation of HTML 4.0 in XML 1.0, W3C Working Draft 5th May 1999 <<http://www.w3.org/TR/1999/xhtml11-19990505>>. 

Resource Description Framework (RDF) Model and Syntax Specification defines a mechanism for describing resources that makes no assumptions about a particular application domain, nor defines (a priori) the semantics of any application domain. RDF uses eXtensible Markup Language (XML) for encoding its interchange syntax. RDF is a model for representing named properties (attributes of resources), property values, and relationships between properties. An RDF model can resemble an entity-relationship diagram or virtually any other information structure that can be depicted as a directed graph. The following standard is emerging:


- [Resource Description Framework \(RDF\) Model and Syntax Specification](#), REC-rdf-syntax-19990222 <<http://www.w3.org/TR/1999/REC-rdf-syntax-19990222>>. 



The RDF Schema specification provides a machine-understandable system for defining “schemas” for descriptive vocabularies like the Dublin Core, a set of 15 metadata elements believed to be broadly applicable to describing Web resources to enable their discovery. It allows designers to specify classes of resource types and properties to convey descriptions of those classes, and constraints on the allowed combinations of classes, properties, and values within a data stream. This has the effect of providing a machine-understandable means of exchanging structured and structural information with respect to various persistent entities, such as DBMSs with XML. The following standard is emerging:

- [Resource Description Framework \(RDF\) Schema Specification](http://www.w3.org/TR/1999/PR-rdf-schema-19990303), W3C Recommendation PR-rdf-schema-19990303 <<http://www.w3.org/TR/1999/PR-rdf-schema-19990303>>. 


A Working Draft of the Extensible Stylesheet Language (XSL) Version 1.0 (Ref: WD-xsl-19981216, 16 December 1998) is being defined in the World Wide Web Consortium. XSL will be used where powerful formatting capabilities are required or for formatting highly structured information such as XML-structured data or XML documents that contain structured data. The new capabilities provided by the XSL proposal include: the formatting of source elements based on ancestry/descendancy, position, and uniqueness; the creation of formatting constructs including generated text and graphics; the definition of reusable formatting macros; direction-writing, independent stylesheets; and extensible set of formatting objects.

XSL uses XML syntax and combines formatting features from Document Style and Semantics Specification Language (DSSSL). More information about XSL can be found at <<http://www.w3c.org/Style/XSL>>. 

#### **2.2.3.2.2 Graphics Data Interchange**

##### **2.2.3.2.2.1 Virtual Reality Modeling Language**

The Virtual Reality Modeling Language (VRML) is a commercial standard with capabilities for 3-D representation of data. The following standard is emerging:

- [ISO/IEC 14772-1:1998](http://www.iso.org/iso/14772-1-1998), Information Technology – Computer graphics and Image Processing – The Virtual Reality Modeling Language – Part 1: Functional specification and UTF-8 encoding. 

##### **2.2.3.2.3 Geospatial Data Interchange**

The Digital Geographic Information Exchange Standard (DIGEST) 2.0, June 1997, has been developed by the DGI Working Group (DGIWG) to support the transfer of DGI between GISs in DoD, U.S., NATO, and co-producer countries. The DIGEST is evolving to supersede many of the MIL-STDs, such as MIL-STD-2407, Vector Product Format, currently maintained by DoD.

- [Digital Geographic Information Exchange Standard \(DIGEST\)](http://www.dgiwg.org/digest/): Edition 2.0, June 1997. 

##### **2.2.3.2.4 Still-Imagery Data Interchange**

ISO/IEC International Standard 12087-5:1998, Part 5: Basic Image Interchange Format (BIIF), is an international standard, now approved but awaiting publication. It provides a commercial/international foundation for interoperability in the interchange of imagery and imagery-related data among applications. BIIF provides a data format container for image, symbol, and text, along with

a mechanism for including image-related support data. A DoD profile of BIIF, technically equivalent to the NITFS 2.1 standard, will be created with the expectation that this profile will eventually supersede MIL-STD-2500B as a DoD Imagery standard in 2000.


#### **2.2.3.2.5 Motion-Imagery Data Interchange**

##### **2.2.3.2.5.1 Video Systems**

###### **2.2.3.2.5.1.1 Video Imagery**

The DoD/IC/USIGS Video Imagery Standards Profile (VISP), Version 1.4, dated 8 June 1999, Chapter 2, outlines emerging Standards, Profiles, and Recommended Practices for Video Imagery applications. In VISP's Chapter 2, emerging video imagery standards include profiles of Video Metadata System, including Intelligence Video Index and Content Description Metadata; Advanced Video Index; Ancillary Data; Advanced Video Index Encoding; Ancillary Data, Encoding into MPEG-2 Private Data Streams; Ancillary Data, Encoding into AES3 Data Streams; Time Code Embedding; Time Reference Synchronization; and completion of all levels of the Video Systems (Spatial and Temporal) Matrix (VSM).

It is also anticipated that MPEG-4 may be used for very low data rate video dissemination applications (such as VSM 1 and VSM 2). The following standard is emerging for advanced television applications:

- [ATSC A/52 \(Audio\)](#), Dolby Digital AC3 is an emerging standard for advanced television applications. 

###### **2.2.3.2.5.1.2 Video Teleconference**


Emerging standards for video teleconferencing are covered in the Information Transfer section of the JTA, [Section 2.3.3.1.2](#).

#### **2.2.3.2.6 Multimedia Data Interchange**

The Draft DoD Guide to Selecting Computer-Based Multimedia Standards, Technologies, Products, and Practices,” dated 15 February 1998, defines emerging standards for DoD systems employing Multimedia. In this context, interactivity is a key distinguishing characteristic, in which “two or more media types (audio, video, imagery, text, and data) are electronically manipulated, integrated, and reconstructed in synchrony, where interactivity indicates an ability of a user to make decisions or selections that (can) alter the type and sequence of information or communication.”

#### **2.2.3.3 Binary Floating-Data Interchange**

ANSI/IEEE 754-1985 defines formats and functional requirements for processing binary floating-point numbers including infinities and Not-a-Number values. A few standards with a larger scope define their own specialized binary floating-point format for use within the scope of that standard. Where not addressed by another standard within JTA (e.g., TADIL J and JVMF), the basic single and double formats are defined in the following emerging standard for transferring binary floating-point data:

- [ANSI/IEEE 754-1985](#), IEEE standard for Binary Floating-Point Arithmetic, March 21, 1985. 



### 2.2.3.4 Operating Systems

#### 2.2.3.4.1 POSIX

The following POSIX standards are emerging:

- [P1003.1a](#) Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) [C Language] – Amendment, Draft 16, December 1998. 
- [P1003.1d D13](#), April 1999: Standard for Information Technology - Portable Operating System Interface (POSIX) Part 1: System Application Program Interface (API) – Amendment d: Additional Realtime Extensions [C Language], Draft 11, May 1998. 
- [P1003.1g](#) Information Technology – Portable Operating System Interface (POSIX) – Part xx: Protocol Independent Interfaces (PII) Draft 6.6, March 1997. 
- [P1003.1h](#) D9, July 1999: Services for Reliable, Available, Serviceable Systems. 
- [P1003.1j](#) D9, July 1999: Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) – Amendment j: Advanced Realtime Extensions [C Language], Draft 7, October 1998. 
- [P1003.1m](#) Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) – Amendment m: Checkpoint/Restart Interface [C Language], Draft 2, November 1998. 
- [P1003.1q](#) Draft Standard for Information Technology – Portable Operating System Interface (POSIX) Part 1: System Application Program Interface (API) – Amendment q: Trace [C Language], Draft 5, July 1999. 
- [P1003.5g/D1.0](#), Standard for Information Technology - Portable Operating System Interface (POSIX) - Ada Language Interfaces – Part 1: Binding for System Application Program Interface (API) –Amendment g: Realtime Extensions, September 1999. 
- [P1003.13a/D1](#), Standard for Information Technology – Standardized Application Environment Profile – POSIX Realtime Application Support (AEP) – Amendment a: Realtime Extension, September 1999. 
- [P1003.21](#) Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: Realtime Distributed Systems Communication Application Program Interface (API) [Language-Independent], V2.0, August 1998. 


In addition, the sponsor committee for POSIX standards (Portable Application Standards Committee), the international POSIX standards working group (JTC1/SC22/WG15), and The Open Group (TOG) are seeking to approve a new IEEE and ISO standards project to revise and consolidate those standards that make up ISO/IEC 9945-1:1996 and ISO/IEC 9945-2:1993 plus any additional supplements to those standards that are already IEEE standards or become IEEE standards by 31 December 1999.

Once this revision is approved by all three bodies, the ISO POSIX standard, the IEEE POSIX standards, and the SUS will be identical in all respects. For more information, see:

<[http://www.opengroup.org/austin/docs/austin\\_9r2.txt](http://www.opengroup.org/austin/docs/austin_9r2.txt)>. 

#### 2.2.3.4.2 Virtual Machines

The Java Virtual Machine (JVM) and supporting libraries are an emerging standard. The JVM may be used to support applications executed through a Web browser or to support development of portable applications. The following standard is emerging:

- The [Java Virtual Machine \(JVM\)](http://java.sun.com/docs/books/vmspec/index.html) is defined in “The Java Virtual Machine Specification” by Tim Lindholm and Frank Yellin, Addison-Wesley, 1997, ISBN 0-201-63452-X. It is also available at: [<http://java.sun.com/docs/books/vmspec/index.html>](http://java.sun.com/docs/books/vmspec/index.html). 

An overview of Java libraries and their status is available on the Web at:

[<http://java.sun.com/products/api-overview/index.html>](http://java.sun.com/products/api-overview/index.html). 

### **2.2.3.5 Distributed Computing Services**







#### **2.2.3.5.1 Remote-Procedure Computing**

The following adopted specification from the Open Group is emerging:

- [OSF-DCE Version 1.2.2](#) was issued to developers by the Open Group in November 1997. 

#### **2.2.3.5.2 Distributed-Object Computing**

The following adopted specifications from the Object Management Group (OMG) are emerging:

- [OMG document orbos/98-05-10](#), Persistent State Service 2.0. 
- [OMG document orbos/98-03-04](#), CORBAservices Interoperable Name Service. 
- [OMG document orbos/98-05-04](#), CORBAservices CORBA/Firewall Security. 
- [OMG document ad/97-08-14](#), Meta Object Facility (MOF). 
- [OMG document ec/98-02-04](#), Negotiation Facility.
- [OMG document bom/99-03-01](#), Workflow Management Facility, 9 March 1999. 
- [OMG document mfg/98-06-06](#), Distributed Simulation Service. 
- [OMG document orbos/99-02-12](#), Joint Revised Realtime CORBA submission.
- [OMG document orbos/99-03-29](#), Errata for the Realtime CORBA joint/revised submission orbos/99-02-12.

### **2.2.3.6 Support Application Services**





#### **2.2.3.6.1 Environment Management**

DoD 5015.2-STD, Design Criteria Standard for Electronic Records Management Software Applications, Sections 2.2.1 through 2.2.11, provides a mandatory baseline set of requirements for Records Management Application (RMA) software. RMA software may be used by DoD Components in the implementation of records management programs. Each official Component record is defined by an approved Records Control Schedule (RCS). If a Component chooses to maintain official records in an electronic form, those records must be managed by application(s) consistent with this standard. Future versions of this standard will address interoperability requirements. The following standard is emerging:





- [DoD-5015.2-STD](#), Design Criteria Standard for Electronic Records Management Software Applications, November 1997 (Sections 2.2.1-2.2.1.1 only).

### 2.2.3.6.2 Learning Technology

“Learning Technology” standards provide for an integrated environment for education, training, and decision support and are considered a subset of the Environment Management services within the DoD TRM. A growing number of technical standards for this field are in varying stages of development by standards bodies including the following, each of which can be accessed on the Web at the URL indicated:

- ☐ Educom Instructional Management System is linked to/from:  
<<http://www.imsproject.org>>. 
- ☐ Aviation Industry CBT Committee is linked to/from:  
<<http://www.aicc.org/pages/down-docs-index.htm#AGR>>. 
- ☐ Alliance of Remote Instructional Authoring and Distribution Networks for Europe (ARIADNE). This is located on the Web at: <<http://ariadne.unil.ch/main.htm>>. 
- ☐ IEEE Learning Technology Standards Committee is linked to/from:  
<<http://grouper.ieee.org/groups/ltsc/>>. 

The following standards are being tracked as Learning Technology emerging standards:

- [IEEE 1484.1](#), Architecture and Reference Model. Base Document entitled, “Learning Technology Systems Architecture (LTSA),” Version 4.00, 1998-05-21, is linked to/from:  
<<http://grouper.ieee.org/groups/ltsc/ltscdocs/>>. 
- [IEEE P1484.2](#), Learner Model. Base Document entitled, “Personal and Performance Information (PAPI) Specification,” Draft Version 5, 15 January 1999, is linked to/from:  
<<http://grouper.ieee.org/groups/ltsc/ltscdocs/>>. 
- [IEEE P1484.12](#) Learning Object Metadata (LOM), Version 2.5a December 1998, is linked to/from: <<http://grouper.ieee.org/groups/ltsc/ltscdocs/>>. 
- [AICC AGR 006](#) Computer Managed Instruction (CMI), V2.0, 1998 May 19, (See <<http://www.aicc.org/pages/down-docs-index.htm>>) is an emerging standard for non-Web-based training. Additionally, this specification is being further developed by IEEE P1484.11 Standard for Computer-Managed Instruction (CMI) linked to/from:  
<<http://grouper.ieee.org/groups/ltsc/ltscdocs/>>. 

Page intentionally left blank.

## **Section 2.3: Information-Transfer Standards**

### **2.3.1 Introduction**

#### **2.3.1.1 Purpose**

Information-transfer standards and profiles are described in this section. These standards promote seamless communications and information-transfer interoperability for DoD systems.

#### **2.3.1.2 Scope**

This section identifies the information-transfer standards required for interoperability between DoD information-technology systems. These standards support access for end-systems including host, Video Teleconferencing (VTC), facsimile, Global Positioning System (GPS), and secondary imagery dissemination. Networking and internetworking standards are identified. Transmission media standards for MILSATCOM, Synchronous Optical Network (SONET), and radio links as well as network and systems management standards for data communications and telecommunications are identified. Finally, emerging technologies that should be monitored for future extension of information-transfer capabilities are identified. This section includes the Communications Services depicted in [Figure 2.1-1](#), DoD Technical Reference Model. Security standards are addressed in [Section 2.6.2.3](#).

#### **2.3.1.3 Background**

The standards are drawn from widely accepted commercial standards that meet DoD requirements. Where necessary for interoperability, profiles of commercial standards are used. Military standards are mandated only when suitable commercial standards are not available. For example, the JTA makes use of the open-systems architecture used by the Internet and the Defense Information System Network (DISN). System components are categorized here as end-systems, networks, and transmission media. End-systems (e.g., host computers, terminals) generally execute applications on behalf of users and share information with other end-systems via networks. Networks may be relatively simple (e.g., point-to-point links or subnetworks that are homogenous in protocol stacks) or have complex internal structures of diverse subnetworks. Routers interconnect two or more subnetworks and forward packets across subnetwork boundaries. Routers are distinct from hosts in that they are normally not the destination of data traffic. End-systems and networks are connected by transmission media.

### **2.3.2 Mandated Standards**

This subsection identifies the mandatory standards, profiles, and practices for information transfer. Each mandated standard or practice is clearly identified on a separate bulleted line and includes a formal reference that can be included within Requests for Proposals (RFPs) or Statements of Work (SOWs). Appendix B contains a table that summarizes the mandated standards from this section and provides information on how to obtain the standards.

#### **2.3.2.1 End-System Standards**

This section addresses standards for the following types of end-systems: host, VTC, facsimile, imagery dissemination, and GPS.

### 2.3.2.1.1 Host Standards

Hosts are computers that generally execute application programs on behalf of users and share information with other hosts. Internet Engineering Task Force (IETF) Standard-3 is an umbrella standard that references other documents and corrects errors in some of the referenced documents. Standard-3 also adds additional discussion and guidance for implementers. The following standard is mandated:



- [IETF Standard 3/RFC-1122/RFC-1123](#), Host Requirements, October 1989. 

#### 2.3.2.1.1.1 Application-Support Services




For Year 2000 remediation issues, including ACP publications, see [Section 2.1.2.2.1](#).

##### 2.3.2.1.1.1.1 Electronic Mail

The standard for official organizational-messaging traffic between DoD organizations is the Defense Message System's (DMS) X.400-based suite of military messaging standards defined in Allied Communication Protocol (ACP) 123. The ACP 123 annexes contain standards profiles for the definition of the DMS "Business Class Messaging" (P772) capability and the Message Security Protocol (MSP). Organizational messaging is considered a high-assurance messaging service that requires authentication, delivery confirmation, and encryption. See Section 2.6 for security standards. Since X.400 is not an Internet standard, see Section 2.3.2.1.1.2.2 for operation over Internet Protocol (IP)-based networks. The following standards are mandated:

- [ACP 123, Common Messaging Strategy and Procedures](#), November 1994. 
- [ACP 123, U.S. Supplement No. 1](#), Common Messaging Strategy and Procedures, November 1995. 

DMS has expanded its baseline to include a medium-assurance messaging service. The requirements for medium-assurance messaging are less stringent than organizational messaging and can be met by existing IP-based mail standards. This allows the augmentation of DMS to include the use of the Simple Mail Transfer Protocol (SMTP) for medium-assurance messaging. For SMTP, the following standards are mandated:


- [IETF Standard 10/Internet Engineering Task Force \(IETF\):RFC-821/RFC-1869/RFC-1870](#), Simple Mail Transfer Protocol (SMTP) Service Extensions, November 1995. 
- [IETF Standard 11/RFC-822/RFC-1049](#), Standard for the Format of ARPA Internet Text Messages, 13 August 1982. 
- [IETF RFCs 2045-2049](#), Multipurpose Internet Mail Extensions (MIME) Parts 1-5, November 1996. 

##### 2.3.2.1.1.1.2 Directory Services

###### 2.3.2.1.1.1.2.1 X.500 Directory Services

International Telecommunications Union (ITU) X.500 provides directory services that may be used by users or host applications to locate other users and resources on the network. While it is appropriate for all grades of service, it must be used for high-grade service where standards-based access control, signed operations, replication, paged results, and server-to-server communication are required. It provides the security services used by DMS-compliant X.400 implementations and

is mandated for use with DMS. See [Section 2.6](#) for security standards. Since X.500 is not an Internet standard, see [Section 2.3.2.1.1.2.2](#) for operation over IP-based networks. The following standard is mandated:

- [ITU-T X.500](#), The Directory – Overview of Concepts, Models, and Services – Data Communication Networks Directory, 1993. 

#### **2.3.2.1.1.1.2.2 Lightweight Directory Access Protocol**

Lightweight Directory Access Protocol (LDAP) (Version 2) is an Internet protocol for accessing online directory services. It runs directly over Transmission Control Protocol (TCP). LDAP derives from the X.500 Directory Access Protocol (DAP). It is appropriate for systems that need to support a medium grade of service in which security is not an issue, and access is only needed to a centralized server. The following standard is mandated:

- [IETF RFC-1777](#), Lightweight Directory Access Protocol, March 1995. 

#### **2.3.2.1.1.1.2.3 Domain Name System**

Domain Name System (DNS) is a hierarchical host management system that has a distributed database. It provides the look-up service of translating between host names and IP addresses. DNS uses TCP/User Datagram Protocol (UDP) as a transport service when used in conjunction with other services. The following standard is mandated:

- [IETF Standard 13/RFC-1034/RFC-1035](#), Domain Name System, November 1987. 

#### **2.3.2.1.1.1.3 File Transfer**

Basic File Transfer is accomplished using the File Transfer Protocol, which provides a reliable file transfer service for text or binary file. FTP uses TCP as a transport service. The following standard is mandated:

- [IETF Standard 9/RFC-959](#), File Transfer Protocol, October 1985, with the following FTP commands mandated for reception: Store unique (STOU), Abort (ABOR), and Passive (PASV).


#### **2.3.2.1.1.1.4 Remote Terminal**

For ASCII text-oriented remote-terminal services, Telecommunications Network (TELNET) provides a virtual terminal capability that allows a user to “log on” to a remote system as though the user’s terminal were directly connected to the remote system. The following standard is mandated:

- [IETF Standard 8/RFC-854/RFC-855](#), TELNET Protocol, May 1983. 




#### **2.3.2.1.1.1.5 Network Time Synchronization**

Network Time Protocol (NTP) provides the mechanisms to synchronize time and coordinate time distribution in a large, diverse internet. The following standard is mandated:

- [IETF RFC-1305](#), Network Time Protocol (Version 3) Specification, Implementation, and Analysis, March 1992. 

### 2.3.2.1.1.1.6 Bootstrap Protocol

Bootstrap Protocol (BOOTP) is used to provide address determination and bootfile selection. It assigns an IP address to workstations with no IP address. The following standards are mandated:

- [IETF RFC-951](#), Bootstrap Protocol, September 1985. 
- [IETF RFC-2132](#), DHCP Options and BOOTP Vendor Extensions, March 1997. 
- [IETF RFC-1542](#), Clarifications and Extensions for the Bootstrap Protocol, October 1993. 

### 2.3.2.1.1.1.7 Configuration Information Transfer


The Dynamic Host Configuration Protocol (DHCP) provides an extension of BOOTP to support the passing of configuration information to Internet hosts. DHCP consists of two parts: a protocol for delivering host-specific configuration parameters from a DHCP server to a host, and a mechanism for automatically allocating IP addresses to hosts. The following standard is mandated:

- [IETF RFC-2131](#), Dynamic Host Configuration Protocol, March 1997. 

### 2.3.2.1.1.1.8 Web Services



#### 2.3.2.1.1.1.8.1 Hypertext Transfer Protocol

Hypertext Transfer Protocol (HTTP) is used for search and retrieval within the Web. HTTP uses TCP as a transport service. The following standard is mandated:

- [IETF RFC-2616](#), Hypertext Transfer Protocol – HTTP/1.1, June 1999. 


#### 2.3.2.1.1.1.8.2 Uniform Resource Locator

A Uniform Resource Locator (URL) specifies the location of, and access methods for, resources on the Internet. The following standards are mandated:

- [IETF RFC-1738](#), Uniform Resource Locators (URL), 20 December 1994. 
- [IETF RFC-1808](#), Relative Uniform Resource Locators, June 1995. 

#### 2.3.2.1.1.1.9 Connectionless Data Transfer

The Connectionless Data Transfer Application Layer Standard allows Variable Message Format (VMF) messages to be used in connectionless applications. This standard uses TCP/UDP as a transport service. The following standard is mandated:

- [MIL-STD-2045-47001B](#), Connectionless Data Transfer Application Layer Standard, 20 January 1998. 

### 2.3.2.1.1.2 Transport Services



The transport services provide host-to-host communications capability for application support services. The following sections define the requirements for this service.



### **2.3.2.1.1.2.1 Transmission Control Protocol/User Datagram Protocol Over Internet Protocol**


#### **2.3.2.1.1.2.1.1 Transmission Control Protocol**

Transmission Control Protocol (TCP) provides a reliable connection-oriented transport service. The following standards are mandated:

- [IETF Standard 7/RFC-793](#), Transmission Control Protocol, September 1981. In addition, PUSH flag and the NAGLE Algorithm, as defined in IETF Standard 3, Host Requirements, are mandated. 
- [IETF RFC-2001](#), TCP Slow Start, Congestion Avoidance, Fast Retransmit, and Fast Recovery Algorithms, January 1997. 


#### **2.3.2.1.1.2.1.2 User Datagram Protocol**

User Datagram Protocol (UDP) provides an unacknowledged, connectionless datagram transport service. The following standard is mandated:


- [IETF Standard 6/RFC-768](#), User Datagram Protocol, 28 August 1980. 

#### **2.3.2.1.1.2.1.3 Internet Protocol**

Internet Protocol (IP) is a basic connectionless datagram service. All protocols within the IP suite use the IP datagram as the basic data transport mechanism. Two other protocols are considered integral parts of IP: the Internet Control Message Protocol (ICMP) and the Internet Group Management Protocol (IGMP). ICMP is used to provide error reporting, flow control, and route redirection. IGMP provides multicast extensions for hosts to report their group membership to multicast routers. The following standard is mandated:

- [IETF Standard 5/RFC-791/RFC-950/RFC-919/RFC-922/RFC-792/RFC-1112](#), Internet Protocol, September 1981. In addition, all implementations of IP must pass the 8-bit Type-of-Service (TOS) byte transparently up and down through the transport layer as defined in IETF Standard 3, Host Requirements. 

Furthermore, for hosts that transmit or receive multi-addressed datagrams over Combat Net Radio (CNR), the multi-addressed IP option field must be used. The following standard is mandated:

- [IETF Informational RFC 1770](#), IPv4 Option for Sender Directed Multi-Destination Delivery, 28 March 1995. 

#### **2.3.2.1.1.2.2 Open-Systems Interconnection Transport Over IP-based Networks**

This protocol provides the interworking between Transport Protocol Class 0 (TP0) and TCP transport service necessary for Open-Systems Interconnection (OSI) applications to operate over IP-based networks. The following standard is mandated:

- [IETF Standard 35/RFC 1006](#), ISO Transport Service on top of the TCP, May 1987. 

### 2.3.2.1.2 Video Teleconferencing Standards

The ASD (C3I) mandated Federal Telecommunications Recommendation (FTR) 1080A-1998 Video Teleconferencing Profile identifies ITU-T H.320 as the key standard to provide interoperability between VTC terminal equipment, both point-to-point and multipoint configurations operating at data rates of 56-1,920 Kilobits per second (Kbps). ITU-T H.320, Narrow Band Visual Telephone Systems and Terminal Equipment, July 1997, is an umbrella standard of recommendations addressing audio, video, signaling, and control. Also in the FTR is ITU-T T.120, Transmission Protocols for Multimedia Data, July 1996, which references a family of standards for applications implementing the features of audiographic conferencing, facsimile, still-image transfer, annotation, pointing, whiteboard, file transfer, audiovisual control, and application sharing.

For VTC units (VTUs) and Multipoint Control Units (MCUs) operating at data rates of 56-1,920 Kbps, except for operation over packet-based TCP/IP networks, the standards contained in FTR 1080A-1998, Appendix A (See Table 2.3-1) are mandated:

- [FTR 1080A-1998](#), Appendix A, Video Teleconferencing Profile, October 1998.

**Table 2.2-2: ITU-T/EIA Standards Mandated in FTR 1080A-1998, Appendix A**

Standard	Description	Usage
H.221	Frame structure for 64 to 1920 Kbit/s channel in audiovisual services	VTU/MCU General
H.230	Frame-synchronous control and indication signals for audiovisual systems	VTU/MCU General
H.242	System for establishing communication between audio visual terminals using digital channels up to 2 Mbits/s	VTU/MCU General
H.261	Video CODEC for audiovisual services at px64 Kbps	VTU/MCU Video
H.320	Narrow-band visual telephone systems and telephone equipment	VTU/MCU General
T.120	Transmission protocols for multimedia data	VTU/MCU Multimedia
T.122	Multipoint communications service for audiographic and audiovisual conferencing service definition	VTU/MCU Multimedia
T.123	Protocol stacks for audiographic and audiovisual teleconferencing applications	VTU/MCU Multimedia
T.124	Generic conference control for audiographic and audiovisual terminals and multipoint control units	VTU/MCU Multimedia
T.125	Multipoint communications service protocol specification	VTU/MCU Multimedia
T.126	Multipoint still image and annotation conferencing protocol specification	VTU Multimedia
T.127	Multipoint binary file transfer protocol	VTU Multimedia


**Table 2.2-2: ITU-T/EIA Standards Mandated in FTR 1080A-1998, Appendix A**

Standard	Description	Usage
T.128	Multipoint application sharing	VTU Multimedia
T.4	Group 3 facsimile - hardcopy representation	VTU Multimedia
T.82	Softcopy image compression (Joint Bi-level Image Experts Group [JBIG])	VTU Multimedia
T.81	Softcopy color image compression (Joint Photographic Experts Group [JPEG])	VTU Multimedia
H.224	Real-time control protocol for simplex applications using the H.221 LSD/HSD/MLP channels	VTU Multimedia
H.281	Far-end camera control protocol for video conferences using H.224	VTU Multimedia
G.711	Pulse code modulation 3.1 KHz to 48, 56, and 64 (narrowband speech mode)	VTU Audio
G.722	Audio CODEC, 7 KHz at 48, 56, and 64 Kbps (wideband speech)	VTU/MCU Audio
G.728	Audio CODEC 3.1 KHz at 16 Kbps (narrowband speech mode)	VTU/MCU Audio
H.231	Multipoint control unit functional description	MCU General
H.243	Procedure for establishing communication between three or more audiovisual terminals using digital channels up to 2 Mbit/s	MCU General
EIA-422B	Electrical characteristics of balanced voltage digital interface circuits	VTU/MCU Encryption Interface
EIA-449	General-purpose 37-position and 9-position interface for data terminal equipment and data circuit-terminating equipment employing serial binary data interchange	VTU/MCU Encryption Interface


For applications implementing the features of audiographic conferencing, facsimile, still-image transfer, annotation, pointing, whiteboard, file transfer, audiovisual control, and application sharing, over LANs and at low bit rates (9.6-28.8 Kbps), the following standard is mandated:

- [ITU-T T.120](#), Transmission Protocols for Multimedia Data, July 1996. 


For VTC terminals operating within Local Area Networks, the following standard is mandated:

- [ITU-T H.323](#), Packet-based Multimedia Communications Systems, January 1998. For all other implementations of H.323, such as used over wide area networks where bandwidth, quality of service, and scalability may not be sufficient for IP-based video conferencing, see emerging standards paragraph [2.3.3.1.2](#). 

For VTC terminals operating at low bit rates (9.6 to 28.8 Kbps) the following standard is mandated:

- [ITU-T H.324](#), Terminal for Low Bit Rate Multimedia Communications, January 1998. 

For inverse multiplexers connected to VTC terminals, and for VTC terminals with built-in inverse multiplexers, the following standard is mandated:



- [ITU-T H.244](#), Synchronized Aggregation of Multiple 64 or 56 Kbps channels, July 1995. 

For information on the ASD (C3I) VTC guidance and the Federal Telecommunications Recommendation FTR 1080A-1998 Video Teleconferencing Profile, see URL:  
<<http://www.ncs.gov/n6> and URL: [disavtc.spawars.navy.mil](mailto:disavtc.spawars.navy.mil)>.

### **2.3.2.1.3 Facsimile Standards**


#### **2.3.2.1.3.1 Analog Facsimile Standards**

For Facsimile (analog output) standards that comply with the ITU-T Group 3 specifications, the following standards are mandated:

- [EIA/TIA-465-A](#), Group 3 Facsimile Apparatus for Document Transmission, 21 March 1995. 
- [EIA/TIA-466-A](#), Procedures for Document Facsimile Transmission, 27 September 1996. 


#### **2.3.2.1.3.2 Digital Facsimile Standards**

Digital Facsimile equipment standards for Type I and/or Type II modes are used for digital facsimile terminals operating in tactical, high Bit Error Rate (BER) environments and for facsimile transmissions utilizing encryption or interoperability with NATO countries. The following standard is mandated:

- [MIL-STD 188-161D](#), Interoperability and Performance Standards for Digital Facsimile Equipment, 10 January 1995. 

#### **2.3.2.1.4 Imagery Dissemination Communications Standards**

The Tactical Communications Protocol 2 (TACO2) is the communications component of the National Imagery Transmission Format Standard (NITFS) suite of standards used to disseminate secondary imagery. TACO2 is used over point-to-point tactical data links in high-BER disadvantaged communications environments. TACO2 is used to transfer secondary imagery and related products in which JTA transfer protocols in [Section 2.3.2.1.1.2](#) fail (e.g., TACO2 only applies to users having simplex and half-duplex links as their only means of communications). MIL-HDBK-1300A, NITFS, provides guidance to implement various Technical Interface Specifications (TISs) to connect the TACO2 host to specific cryptographic equipment. The following standard is mandated:

- [MIL-STD-2045-44500](#), National Imagery Transmission Format Standard (NITFS) Tactical Communications Protocol 2 (TACO2), 18 June 1993; with Notice of Change 1, 29 July 1994; and Notice of Change 2, 27 June 1996. 

#### **2.3.2.1.5 Global Positioning System**


The CJCS (CJCSI 6130.01A, 1998 CJCS Master Positioning, Navigation, and Timing Plan) has declared that the GPS will be the primary radionavigation system source of positioning, navigation and timing (PNT) for the DoD. GPS is a space-based, worldwide, precise positioning, velocity, and timing system. It provides an unlimited number of suitably equipped passive users with a force-

enhancing, common-grid, all-weather, continuous, three-dimensional PNT capability. The NAVSTAR GPS provides two levels of service—a Standard Positioning Service (SPS) and a Precise Positioning Service (PPS). The following standard is mandated:

- [ICD-GPS-200C](#), NAVSTAR GPS Space Segment/Navigation User Interfaces, 16 October 1997.

The PPS was designed primarily for U.S. military use, and the DoD will control access to the PPS through cryptography. DoD GPS users with combat, combat support, or combat service support missions must acquire and use PPS-capable GPS receivers. The U.S. will enter into special arrangements with military users of allied and friendly governments to allow them use of the PPS. The following standards are mandated:

- [ICD-GPS-222A](#), NAVSTAR GPS UE Auxiliary Output Chip Interface (U), 26 April 1996.
- [ICD-GPS-225A](#), NAVSTAR GPS Selective Availability/Anti-spoofing Host Application Equipment Design Requirements with the Precise Positioning Service Security Module (U), 12 March 1998.





For additional information associated with the acquisition and use of PPS-capable GPS receivers, including End-of-Week Rollover compliance, and Year 2000 compliance for GPS receivers, consult the GPS JPO at the following Web site: <http://gps.losangeles.af.mil>. 

### 2.3.2.2 Network Standards

Networks are made up of subnetworks, and the internetworking (router) elements needed for information transfer. This section identifies the standards needed to access certain subnetworks and for routing and interoperability between the subnetworks.

#### 2.3.2.2.1 Internetworking (Router) Standards

Routers are used to interconnect various subnetworks and end-systems. Protocols necessary to provide this service are specified below. RFC-1812 is an umbrella standard that references other documents and corrects errors in some of the referenced documents. In addition, some of the standards mandated for hosts in [Section 2.3.2.1.1](#) also apply to routers. The following standards are mandated:

- [IETF RFC-1812](#), Requirements for IP Version 4 Routers, 22 June 1995. 
- [IETF Standard 6/RFC-768](#), User Datagram Protocol, 28 August 1980. 
- [IETF Standard 7/RFC-793](#), Transmission Control Protocol, September 1981. 
- [IETF Standard 8/RFC-854/RFC-855](#), TELNET Protocol, May 1983.
- [IETF Standard 13/RFC-1034/RFC-1035](#), Domain Name System, November 1987.
- [IETF RFC-951](#), Bootstrap Protocol, September 1985.
- [IETF RFC-2132](#), DHCP Options and BOOTP Vendor Extensions, March 1997.
- [IETF RFC-2131](#), Dynamic Host Configuration Protocol, March 1997.
- [IETF RFC-1542](#), Clarifications and Extensions for the Bootstrap Protocol, October 1993.
- [IETF Standard 33/RFC-1350](#), The TFTP Protocol (Revision 2), July 1992, to be used for initialization only. 


Security requirements are addressed in [Section 2.6](#).

#### **2.3.2.2.1.1 Internet Protocol**

IP is a basic connectionless datagram service. All protocols within the IP suite use the IP datagram as the basic data transport mechanism. IP was designed to interconnect heterogeneous networks and operates over a wide variety of networks. Two other protocols are considered integral parts of IP: ICMP and IGMP. ICMP is used to provide error reporting, flow control, and route redirection. IGMP provides multicast extensions for hosts to report their group membership to multicast routers. The following standard is mandated:

- [IETF Standard 5/RFC-791/RFC-950/RFC-919/RFC-922/RFC-792/RFC-1112](#), Internet Protocol, September 1981. 

In addition, in all implementations of IP routers that transmit or receive multi-addressed datagrams over CNR, the multi-addressed IP option field must be used. The following standard is mandated:

- [IETF Informational RFC-1770](#), IPv4 Option for Sender Directed Multi-Destination Delivery, March 1995. 

#### **2.3.2.2.1.2 Internet Protocol Routing**

Routers exchange connectivity information with other routers to determine network connectivity and adapt to changes in the network. This enables routers to determine, on a dynamic basis, where to send IP packets.



##### **2.3.2.2.1.2.1 Interior Routers**

Routes within an autonomous system are considered local routes that are administered and advertised locally by means of an interior gateway protocol. For unicast interior gateway routing, the following standard is mandated:

- [IETF Standard 54/RFC-2328](#), Open Shortest Path First Routing Version 2, April 1998. 

##### **2.3.2.2.1.2.2 Exterior Routers**

Exterior gateway protocols are used to specify routes between autonomous systems. For exterior gateway routing, Border Gateway Protocol 4 (BGP-4) uses TCP as a transport service. The following standards are mandated:

- [IETF RFC-1771](#), A Border Gateway Protocol 4 (BGP-4), 21 March 1995. 
- [IETF RFC-1772](#), Application of the Border Gateway Protocol in the Internet, March 1995. 





#### **2.3.2.2.2 Subnetworks**

This section identifies the standards needed to access subnetworks used in joint environments.

##### **2.3.2.2.2.1 Local Area Network Access**






While no specific Local Area Network (LAN) technology is mandated, the following is required for interoperability in a joint environment. This requires provision for a LAN interconnection. Ethernet, the implementation of Carrier Sense Multiple Access with Collision Detection (CSMA/

CD), is the most common LAN technology in use with TCP/IP. The hosts use a CSMA/CD scheme to control access to the transmission medium. An extension to Ethernet, Fast Ethernet provides interoperable service at both 10 Mbps and 100 Mbps. Higher-speed interconnections are provided by 100BASE-TX (two pairs of Category 5 unshielded twisted pair, with 100BASE-TX Auto-Negotiation features employed to permit interoperability with 10BASE-T). For platforms physically connected to a Joint Task Force LAN, the following standards are mandated as the minimum set for operation in a Joint Task Force:



- [ISO/IEC 8802-3:1996](#), Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications, 10BASE-T Medium-Access Unit (MAU). 
- [IEEE 802.3u-1995](#), Supplement to ISO/IEC 8802-3:1993, Local and Metropolitan Area Networks: Media Access Control (MAC) Parameters, Physical Layer, Medium Attachment Units, and Repeater for 100 Mbps Operation, Type 100BASE-T (Clauses 21-30). 
- [IETF Standard 41/RFC-894](#), Standard for the Transmission of IP Datagrams Over Ethernet Networks, April 1984. 
- [IETF Standard 37/RFC-826](#), An Ethernet Address Resolution Protocol, November 1982. 

#### 2.3.2.2.2 Point-to-Point Standards

For full duplex, synchronous or asynchronous, point-to-point communication, the following standards are mandated:


- [IETF Standard 51/RFC-1661/RFC-1662](#), Point-to-Point Protocol (PPP), July 1994. 
- [IETF RFC-1332](#), PPP Internet Protocol Control Protocol (IPCP), May 1992. 
- [IETF RFC-1989](#), PPP Link Quality Monitoring (LQM), August 1996. 
- [IETF RFC-1994](#), PPP Challenge Handshake Authentication Protocol (CHAP), August 1996. 
- [IETF RFC-1570](#), PPP LCP Extensions, January 1994. 

For the serial line interface, one of the following is mandated:

- [EIA/TIA-232-F](#), Interface Between Data Terminal Equipment and Data Circuit Terminating Equipment Employing Serial Binary Data Interchange, October 1997. 
- [EIA/TIA-530-A](#), High Speed 25-Position Interface for Data Terminal Equipment and Data Circuit Terminating Equipment, Including Alternative 26-Position Connector, December 1998. (This calls out EIA/TIA-422-B and -423-B). 

#### 2.3.2.2.3 Combat Net Radio Networking

Combat Net Radios (CNRs) are a family of radios that allow voice or data communications for mobile users. These radios provide a half-duplex broadcast transmission media with potentially high BERs. The method by which IP packets are encapsulated and transmitted is specified in MIL-STD-188-220B. With the exception of High Frequency (HF) networks, MIL-STD-188-220B shall be used as the standard communications net access protocol for CNR networks. The following standard is mandated:


- [MIL-STD-188-220B](#), Interoperability Standard for Digital Message Transfer Device (DMTD) Subsystems, 20 January 1998. 




#### 2.3.2.2.2.4 Integrated Services Digital Network

Integrated Services Digital Network (ISDN) is an international standard used to support integrated voice and data over standard twisted-pair wire. ISDN defines a Basic Rate Interface (BRI) and Primary Rate Interface (PRI) to provide digital access to ISDN networks. These interfaces support both circuit-switched and packet-switched services. It should be noted that deployable systems might additionally be required to support other non-North American ISDN standards when accessing region-specific international infrastructure for ISDN services. The JTA recognizes that this is a critical area affecting interoperability but does not recommend specific solutions in this version. The following standards are mandated:


For BRI physical layer:

- [ANSI T1.601](#), ISDN Basic Access Interface for Use on Metallic Loops for Application on the Network Side of the NT, Layer 1 Specification, 1992. 
- [ANSI T1.605](#), ISDN Basic Access Interface for S and T Reference Points - Layer 1 Specification, 1991.





For PRI physical layer:

- [ANSI T1.408](#), ISDN Primary Rate - Customer Installation Metallic Interfaces, Layer 1 Specification, 1990. 





For the data-link layer:

- [ANSI T1.602](#), ISDN Data Link Signaling Specification for Application at the User Network Interface, 1996. 



For signaling at the user-network interface:

- [ANSI T1.607](#), Digital Subscriber Signaling System No. 1 (DSS1) - Layer 3 Signaling Specification for Circuit Switched Bearer Service, 1998. 
- [ANSI T1.610](#), DSS1 - Generic Procedures for the Control of ISDN Supplementary Services, 1994. 
- [ANSI T1.619](#), Multi-Level Precedence and Preemption (MLPP) Service, ISDN Supplementary Service Description, 1992. 
- [ANSI T1.619a](#), Supplement, 1994. 


For signaling at node-to-node interface:

- [ANSI T1.111](#), Signaling System No. 7, Message Transfer Part, 1996. 
- [ANSI T1.112](#), Signaling System No. 7, Signaling Connection Control Part Functional Description, 1996. 
- [ANSI T1.113](#), Signaling System No. 7, ISDN User Part, 1995. 
- [ANSI T1.114](#), Signaling System No. 7, Transaction Capability Application Part, 1996. 



For signaling at the user-network interface, ANSI mandates are as profiled by the following National ISDN documents as adopted by the North American ISDN User's Forum (NIUF):

- [SR-3875](#), National ISDN 2000, Telcordia (formerly Bellcore), May 1999. 
- [SR-4620](#), 1999 Version of National ISDN Basic Rate Interface Customer Premise Equipment Generic Guidelines, Telcordia, December 1998. 




- [SR-4619](#), 1999 Version of National ISDN Primary Rate Interface Customer Premise Equipment Generic Guidelines, Telcordia, December 1998. 

For addressing:

- [ITU-T E.164](#), Numbering Plan for the ISDN Era, May 1997. 
- [DISA Circular \(DISAC\) 310-225-1](#), Defense Switched Network (DSN) User Services Guide, 2 April 1998. 

For transmitting IP packets when using ISDN packet-switched services:


- [IETF RFC-1356](#), Multiprotocol Interconnect on X.25 and ISDN in the Packet Mode, 6 August 1992. 

For transmitting IP packets using Point-to-Point Protocol (PPP) over ISDN:

- [IETF RFC-1618](#), PPP over ISDN, 13 May 1994. 

#### **2.3.2.2.5 Asynchronous-Transfer Mode**

Asynchronous-Transfer Mode (ATM) is a high-speed switched data transport technology that takes advantage of primarily low bit error rate transmission media to accommodate intelligent multiplexing of voice, data, video, and composite inputs over high-speed trunks and dedicated user links. ATM is a layered type of transfer protocol with the individual layers consisting of an ATM Adaptation Layer (AAL), the ATM layer, and the Physical Layer. The function of the AAL layer is to adapt any traffic (video streams, data packets from upper layer protocols) into the ATM format of 48-octet payload. It also receives the cells from the ATM layer and reassembles the protocol data units. The ATM Layer adds the necessary header information used by switches and end-systems alike to transfer cells across the ATM network. The Physical Layer converts the cell information to the appropriate electrical/optical signals for the given transmission medium. The ATM Forum's User-Network Interface (UNI) Specification defines the primary specification for end-system connection to ATM networks. The Private Network-Network Interface (PNNI) Specification defines the PNNI protocol for use between private ATM switches, and between groups of private ATM switches. The PNNI supports the distribution of topology information between switches and clusters of switches to allow paths to be computed through the network. The PNNI also defines the signaling to establish point-to-point and point-to-multipoint connections across the ATM network. ATM Forum's Local Area Network Emulation supports the emulation of Ethernet, allowing ATM Networks to be deployed without disruption of host network protocols and applications. For information on the ASD (C3I) ATM guidance, see URL: <http://www.disa.mil>. ▶

The standards below are mandated. For information on ATM Forum approved specifications, see URL: <http://www.atmforum.com/atmforum/specs/specs.html>. 

For Physical Layer:

- [ATM Forum, af-phy-0040.000](#), Physical Interface Specification for 25.6 Mbps over Twisted Pair Cable, November 1995.
- [ATM Forum, af-uni-0010.002](#), ATM UNI Specification V 3.1, Section 2.1 and 2.4, September 1994.
- [ATM Forum, af-phy-0015.000](#), ATM Physical Medium Dependent Interface for 155 Mbps over Twisted Pair Cable, September 1994.

- [ATM Forum, af-phy-0016.000](#), DS1 Physical Layer Specification, September 1994.
- [ATM Forum, af-phy-0054.000](#), DS3 Physical Layer Interface Specification, January 1996.
- [ATM Forum, af-phy-0046.000](#), 622.08 Mbps Physical Layer Specification, January 1996.
- [ATM Forum, af-phy-0064.000](#), E1 Physical Interface Specification, September 1996.
- [ATM Forum, af-phy-0043.000](#), A Cell-based Transmission Convergence Sublayer for Clear Channel Interfaces, November 1995.

For User to Network Interface:

- [ATM Forum, af-uni-0010.002](#), ATM UNI Specification V3.1, September 1994.
- [ATM Forum, af-sig-0061.000](#), ATM UNI Signaling Specification, Version 4.0, July 1996.

For Layer Management Capabilities:

- [ATM Forum, af-ilmi-0065.000](#), Integrated Local Management Interface (ILMI) Specification, Version 4.0, September 1996.
- [ATM Forum, af-uni-0010.002](#), ATM UNI Specification V 3.1, (Section 4:ILMI for UNI 3.1) September 1994.



For Traffic Management Functions:

- [ATM Forum, af-tm-0056.000](#), Traffic Management Specification, Version 4.0, April 1996.

For Circuit Emulation Functions:

- [ATM Forum, af-vtoa-0078.000](#), Circuit Emulation Service Interoperability Specification, Version 2.0, January 1997.

For AAL1 and AAL5 Functions:

- [ITU-T I.363.1](#), B-ISDN ATM Adaptation Layer Specification: Type 1 ATM Adaptation Layer (AAL1), August 1996. 
- [ITU-T I.363.5](#), B-ISDN ATM Adaptation Layer Specification: Type 5 ATM Adaptation Layer (AAL5), August 1996. 

For Private Network-to-Network Interfaces:

- [ATM Forum, af-pnni-0055.000](#), Private Network to Network Interface (PNNI) Specification, Version 1.0, March 1996.
- [ATM Forum, af-pnni-0066.000](#), PNNI Specification, Version 1.0 Addendum (Soft PVC MIB), September 1996.

For Local Area Network Emulation and IP Over ATM:

- [ATM Forum, af-lane-0021.000](#), Local Area Network Emulation (LANE) Over ATM, Version 1.0, January 1995.
- [ATM Forum, af-lane-0038.000](#), LAN Emulation Client Management Specification, September 1995.
- [ATM Forum, af-lane-0050.00](#), LANE Over ATM, Version 1.0 Addendum, December 1995.
- [ATM Forum, af-lane-0057.000](#), LANE Servers Management Specification 1.0, March 1996.
- [ATM Forum, af-mpoa-0087.000](#), Multi-Protocol Over ATM, Version 1.0, July 1997.

For ATM Addressing Format:

- [DoD ATM Addressing Plan](#), 17 April 1998.

### **2.3.2.3 Transmission Media**


#### **2.3.2.3.1 Military Satellite Communications**

Military Satellite Communications (MILSATCOM) systems include those systems owned or leased and operated by DoD and those commercial satellite communications (SATCOM) services used by DoD. The basic elements of satellite communications are a space segment, a control segment, and a terminal segment (air, ship, ground, etc.). An implementation of a typical satellite link will require the use of satellite terminals, a user communications extension, and military or commercial satellite resources.

##### **2.3.2.3.1.1 Ultra High Frequency Satellite Terminal Standards**


###### **2.3.2.3.1.1.1 5-KHz and 25-KHz Service**

For 5-KHz or 25-KHz single-channel access service supporting the transmission of either voice or data, the following standard is mandated:

- [MIL-STD-188-181B](#), Interoperability Standard for Single Access 5-Khz and 25-Khz UHF Satellite Communications Channels, 20 March 1999. 


###### **2.3.2.3.1.1.2 5-KHz Demand Assigned Multiple Access Service**

For 5-KHz Demand Assigned Multiple Access (DAMA) service, supporting the transmission of data at 75 to 2400 bps and digitized voice at 2400 bps, the following standard is mandated:

- [MIL-STD-188-182A](#), Interoperability Standard for 5-Khz UHF DAMA Terminal Waveform, 31 March 1997, with Notice of Change 1, 9 September 1998; and Notice of Change 2, 22 January 1999. 


###### **2.3.2.3.1.1.3 25-KHz Time Division Multiple Access/Demand Assigned Multiple Access Service**

For 25-KHz Time Division Multiple Access (TDMA)/DAMA service, supporting the transmission of voice at 2,400, 4,800, or 16,000 bps and data at rates of 75 to 16,000 bps, the following standard is mandated:

- [MIL-STD-188-183A](#), Interoperability Standard for 25-Khz TDMA/DAMA Terminal Waveform, 20 March 1998; with Notice of Change 1, 9 September 1998. 


###### **2.3.2.3.1.1.4 Data Control Waveform**

For data controllers operating over single-access 5-KHz and 25-KHz UHF SATCOM channels, the following standard (a robust link protocol that can transfer error-free data efficiently and effectively over channels that have high error rates) is mandated:

- [MIL-STD-188-184](#), Interoperability and Performance Standard for the Data Control Waveform, 20 August 1993, with Notice of Change 1, 9 September 1998. 

#### **2.3.2.3.1.1.5 Demand Assigned Multiple Access Control System**


For the minimum mandatory interface requirements for MILSATCOM equipment that control access to DAMA UHF 5-KHz and 25-KHz MILSATCOM channels, the following standard is mandated:

- [MIL-STD-188-185](#), DoD Interface Standard, Interoperability of UHF MILSATCOM DAMA Control System, 29 May 1996, with Notice of Change 1, 1 December 1997; and Notice of Change 2, 9 September 1998. 

#### **2.3.2.3.1.2 Super High Frequency Satellite Terminal Standards**


##### **2.3.2.3.1.2.1 Earth Terminals**

For minimum mandatory Radio Frequency (RF) and Intermediate Frequency (IF) requirements to ensure interoperability of SATCOM Earth terminals operating over C-, X-, and Ku-band channels, the following standard is mandated:

- [MIL-STD-188-164](#), Interoperability and Performance Standards for C-Band, X-Band, and Ku-Band SHF Satellite Communications Earth Terminals, 13 January 1995; with Notice of Change 1, 9 September 1998. 

##### **2.3.2.3.1.2.2 Phase-Shift Keying Modems**


For minimum mandatory requirements to ensure interoperability of Phase-Shift Keying (PSK) modems operating in Frequency Division Multiple Access (FDMA) mode, the following standard is mandated:

- [MIL-STD-188-165](#), Interoperability and Performance Standards for SHF Satellite Communications PSK Modems (Frequency Division Multiple Access (FDMA) Operations), 13 January 1995, with Notice of Change 1, 9 September 1998. 

#### **2.3.2.3.1.3 Extremely High Frequency Satellite Payload and Terminal Standards**

##### **2.3.2.3.1.3.1 Low Data Rate**

For waveform, signal processing, and protocol requirements for acquisition, access control, and communications for Low Data Rate (LDR) (75 to 2,400 bps) Extremely High Frequency (EHF) satellite data links, the following standard is mandated:

- [MIL-STD-1582D](#), EHF LDR Uplinks and Downlinks, 30 September 1996; with Notice of Change 1, 14 February 1997; and Notice of Change 2, 17 February 1999. 

##### **2.3.2.3.1.3.2 Medium Data Rate (MDR)**

For waveform, signal processing, and protocol requirements for acquisition, access control, and communications for Medium Data Rate (MDR) (4.8 Kbps to 1.544 Mbps) EHF satellite data links, the following standard is mandated:

- [MIL-STD-188-136A](#), EHF MDR Uplinks and Downlinks, 8 June 1998. 

### **2.3.2.3.2 Radio Communications**

#### **2.3.2.3.2.1 Low Frequency and Very Low Frequency**


For radio subsystem requirements operating in the Low Frequency (LF)/Very Low Frequency (VLF) frequency bands, the following standard is mandated:

- [MIL-STD-188-140A](#), Equipment Technical Design Standards for Common Long Haul/Tactical Radio Communications in the LF Band and Lower Frequency Bands, 1 May 1990. 

#### **2.3.2.3.2.2 High Frequency**


##### **2.3.2.3.2.2.1 High Frequency and Automatic Link Establishment**

For both Automatic Link Establishment (ALE) and radio subsystem requirements operating in the High Frequency (HF) bands, the following standard is mandated:

- [MIL-STD-188-141B](#), Interoperability and Performance Standards for Medium and High Frequency Radio Systems, 1 March 1999. 


##### **2.3.2.3.2.2.2 Anti-Jamming Capability**

For anti-jamming capabilities for HF radio equipment, the following standard is mandated:

- [MIL-STD-188-148A](#), Interoperability Standard for Anti-Jam Communications in the HF Band (2-30 Mhz), 18 March 1992. 


##### **2.3.2.3.2.2.3 Data Modems**

For HF data modem interfaces, the following standard is mandated:

- [MIL-STD-188-110A](#), Data Modems, Interoperability and Performance Standards, 30 September 1991. 

##### **2.3.2.3.2.3 Very High Frequency**


For radio subsystem requirements operating in the Very High Frequency (VHF) frequency bands, the following standard is mandated:

- [MIL-STD-188-242](#), Tactical Single Channel (VHF) Radio Equipment, 20 June 1985. 

##### **2.3.2.3.2.4 Ultra High Frequency**

###### **2.3.2.3.2.4.1 Ultra High Frequency Radio**

For radio subsystem requirements operating in the Ultra High Frequency (UHF) frequency bands, the following standard is mandated:

- [MIL-STD-188-243](#), Tactical Single Channel (UHF) Radio Communications, 15 March 1989. 


###### **2.3.2.3.2.4.2 Anti-Jamming Capability**

For anti-jamming capabilities for UHF radio equipment, the following standard is mandated:

- [STANAG 4246](#), Edition 2, HAVE QUICK UHF Secure and Jam-Resistant Communications Equipment, 17 June 1987; with Amendment 3, August 1991.

#### 2.3.2.3.2.5 Super High Frequency

For radio subsystem requirements operating in the Super High Frequency (SHF) frequency bands, the following standard is mandated:

- [MIL-STD-188-145](#), Digital Line-of-Sight (LOS) Microwave Radio Equipment, 7 May 1987; with Notice of Change 1, 28 July 1992. 




#### 2.3.2.3.2.6 Link 16 Transmission Standards

For communicating with the Joint Tactical Information Distribution System (JTIDS)/Multi-Functional Information Distribution System (MIDS) radios, the following standard is mandated:

- [STANAG 4175](#), Edition 1, Technical Characteristics of the Multifunctional Information Distribution System (MIDS), 29 August 1991.

#### 2.3.2.3.3 Synchronous Optical Network Transmission Facilities

SONET is a telecommunications transmission standard for use over fiber-optic cable. SONET is the North American subset of the ITU standardized interfaces, and includes a hierarchical multiple structure, optical parameters, and service mapping. The following standards are mandated:

- [ANSI T1.105](#), Telecommunications – Synchronous Optical Network (SONET) Basic Description Including Multiplex Structure, Rates and Formats (ATIS) (Revision and Consolidation of ANSI T1.105-1991 and ANSI T1.105A-1991), 1995. 
- [ANSI T1.107](#) Digital Hierarchy – Formats Specifications, 1995. 
- [ANSI T1.117](#), Digital Hierarchy – Optical Interface Specifications (SONET) (Single Mode – Short Reach), 1991. 

The citation of applicable ANSI standards for SONET does not ensure C4I interoperability in regions outside North America where standards for these services differ. The JTA recognizes that this is a critical area affecting interoperability but does not recommend specific solutions in this version.

#### 2.3.2.4 Network and Systems Management







Network and Systems Management (NSM) provides the capability to manage designated networks, systems, and information services. This includes: controlling the network's topology; dynamically segmenting the network into multiple logical domains; maintaining network routing tables; monitoring the network load; and making routing adjustments to optimize throughput. NSM also provides the capability to review and publish addresses of network and system objects; monitor the status of objects; start, restart, reconfigure, or terminate network or system services; and detect loss of network or system objects in order to support automated fault recovery. A management system has four essential elements: management stations; management agents; management information bases (MIBs); and management protocols, to which these standards apply.

#### 2.3.2.4.1 Data Communications Management

Data communications management stations and management agents (in end-systems and networked elements) shall support the Simple Network Management Protocol (SNMP). The following SNMP-related standard is mandated:









- [IETF Standard 15/RFC-1157](#), Simple Network Management Protocol (SNMP), May 1990. 

To standardize the management scope and view of end-systems and networks, the following standards are mandated for MIB modules of the management information base:

- [IETF Standard 16/RFC-1155/RFC-1212](#), Structure of Management Information, May 1990. 
- [IETF Standard 17/RFC-1213](#), Management Information Base, March 1991. 
- [IETF RFC-1514](#), Host Resources MIB, September 1993. 
- [IETF Standard 50/RFC-1643](#), Definitions of Managed Objects for the Ethernet-like Interface Types, July 1994. 
- [IETF RFC-1757](#), Remote Network Monitoring Management Information Base, (RMON Version 1), February 1995. 
- [IETF RFC-1850](#), Open Shortest Path First (OSPF) Version 2 Management Information Base, November 1995. 

#### 2.3.2.4.2 Telecommunications Management

Telecommunications management systems for telecommunications switches will implement the Telecommunications Management Network (TMN) framework. To perform information exchange within a telecommunications network, the following TMN framework standards are mandated:

- [ANSI T1.204](#), OAM&P – Lower Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements, 1997. 
- [ANSI T1.208](#), OAM&P – Upper Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements, 1997. 
- [ITU-T M.3207.1](#), TMN management service: maintenance aspects of B-ISDN management, 1996. 
- [ITU-T M.3211.1](#), TMN management service: Fault and performance management of the ISDN access, 1996. 
- [ITU-T M.3400](#), TMN Management Functions, 1997. 
- [ISO/IEC 9595:1998](#), Information Technology – Open Systems Interconnection Common Management Information Services (CMIS). 
- [ISO/IEC 9596-1:1998](#), Information Technology – Open Systems Interconnection – Common Management Information Protocol (CMIP) – Part 1: Specification. 
- [ISO/IEC 9596-2:1993](#), Information Technology – Open Systems Interconnection – Common Management Information Protocol (CMIP): Protocol Implementation Conformance Statement (PICS) proforma. 



### 2.3.3 Emerging Standards

Commercial communications standards and products will evolve over time. The JTA must also evolve to benefit from these standards and products. The purpose of this section is to provide notice of those standards expected to be elevated to mandatory status when implementations of the standards mature.


#### 2.3.3.1 End-System Standards

##### 2.3.3.1.1 Internet Standards

**IP Next Generation/Version 6 (IPv6).** IPv6 is being designed to provide better internetworking capabilities than are currently available within IP (Version 4). IPv6 will include support for the following: expanded addressing and routing capabilities, authentication and privacy, auto-configuration, and increased quality of service capabilities. IPv6 is described by proposed and draft IETF standards including:

- [IETF RFC 2374](#), IPv6 Aggregatable Global Unicast Address Format, July 1998.
- [IETF RFC 2452](#), IP Version 6 Management Information Base for the Transmission Control Protocol, December 1998.
- [IETF RFC 2454](#), IP Version 6 Management Information Base for the User Datagram Protocol, December 1998.
- [IETF RFC 2460](#), Internet Protocol, Version 6 (IPv6) Specification, December 1998.
- [IETF RFC 2461](#), Neighbor Discovery for IP Version 6, (IPv6), December 1998.
- [IETF RFC 2462](#), IPv6 Stateless Address Autoconfiguration, December 1998.
- [IETF RFC 2463](#), Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification, December 1998.
- [IETF RFC 2464](#), Transmission of Ipv6 Packet Over Ethernet Networks, December 1998.
- [IETF RFC 2466](#), Management Information Base for IP Version 6: ICMPv6 Group, December 1998.
- [IETF RFC 2472](#), IPv6 Over PPP, December 1998.
- [IETF RFC 2492](#), IPv6 Over ATM Networks, January 1999.

**Internet Group Management Protocol Version 2 (IGMPv2).** IGMPv2, RFC-2236, is an IETF-proposed standard used by IP hosts to report their multicast group memberships to routers. It updates IETF Std 5 (RFC -1112). IGMPv2 allows group membership termination to be quickly reported to the routing protocol, which is important for subnets with highly volatile group membership and high-bandwidth multicast groups.




**Dynamic Domain Name System.** The Dynamic Domain Name System (DDNS) protocol defines extensions to the Domain Name System (DNS) to enable DNS servers to accept requests to update the DNS database dynamically. DDNS is referenced in RFC 2136. 

**Lightweight Directory Access Protocol 3 (LDAPv3).** The proposed standard for LDAPv3, IETF RFC-2251, supports standards-based authentication, referrals, and all protocol elements of LDAP (IETF RFC 1777). Other features still under development include standards-based access control, signed operations, replication, knowledge references, and paged results.






**Mobile Host Protocol (MHP).** This protocol allows the transparent routing of IP datagrams to mobile nodes in the Internet. Each mobile node is always identified by its home address, regardless of its current point of attachment to the Internet. A mobile IP protocol is currently available as an IETF-proposed standard, RFC-2002, entitled IP Mobility Support.

**Quality of Service.** Quality of Service (QoS) is the ability of a network to ensure that the predetermined traffic and service requirements of a network element (e.g., end-system, router, application) can be satisfied. Multiple fora including the IETF and IEEE are engaged in this evolving end-to-end networking effort to enhance the current networking architecture with support for QoS. To provide services over the LAN/WAN beyond the current best-effort IP-based service, the protocols currently under development to enable end-to-end QoS include:

- Resource Reservation Protocol (RSVP) - Communicates the QoS requirements for a given application to a device in the path of the transmission. A reservation for the required bandwidth is allowed or denied depending on the current network conditions. RSVP is expected to be utilized predominantly in the campus-level networks. The following standards are emerging:
  - [IETF RFC 2205](#), Resource ReSerVation Protocol RSVP Version 1, September 1997. 
  - [IETF RFC 2207](#), RSVP Extensions for IPSEC Data Flows, September 1997. 
  - [IETF RFC 2380](#), RSVP over ATM Implementation Requirements, August 1998. 
  - [IEEE 802.1p](#) and [IEEE 802.1q](#) - These IEEE standards specify the traffic classification method used by Ethernet switches, to expedite delivery of time critical traffic. IEEE 802.1p governs the prioritization of packets, offering eight discrete priority levels from the default (best effort) through reserved (highest priority). IEEE 802.1q defines an additional 4-octet field in the LAN header to support Virtual LANs.

#### 2.3.3.1.2 Video Teleconferencing Standards

There are three emerging standards for VTC over ATM:

- [ITU-T H.310](#) includes underlying standards for video (MPEG2) and audio (MPEG1, MPEG2). H.310 can be used for high-quality VTC requiring > 2 Mbps infrastructure, but does not currently have much industry support. 
- [ITU-T H.321](#) specifies the operation of H.320 codecs over ATM using AAL-1 or AAL-5. H.321 uses Quality of Service to manage videoconferencing quality. It lacks industry wide support. 
- [ITU-T H.323](#) has the most industry support for VTC over ATM. It provides for two modes of operation over ATM: 1) IP over ATM media stream and 2) Real-Time Protocol (RTP) over ATM media stream transport (H.323 Annex C). Implementation of H.323 over non-LAN media (e.g., Metropolitan Area Networks [MANs] and WANs, such as the Internet, SIPRNET, JWICS) is still evolving. 

#### 2.3.3.1.3 Space Communication Protocol Standards

DoD joined a cooperative effort with the National Aeronautics and Space Administration (NASA) and the National Security Agency (NSA) to develop the Space Communication Protocol Standards (SCPS), September 1997. The cognizant DoD office is SMC/AXE. The SCPS protocol suite will increase the reliability of data transfer, increase interoperability with both DoD and non-DoD

assets, and decrease the cost of operating our space systems. The suite consists of the following of four protocols that operate at and above the network layer of the Open Systems Interconnect (OSI) model:





The File Handling Protocol (FP) is an application-layer protocol (Layer 7 in the OSI model) derived from the Internet file transfer protocol (FTP). FP is more capable than FTP in that individual records within a file can be updated in addition to the entire file. Another important feature of FP is that a file transfer can be automatically restarted after an interruption.

The Transport Protocol (TP) is a transport-layer protocol (Layer 4 in the OSI model) derived from the Internet Transmission Control Protocol (TCP). TP can provide better end-to-end throughput in the space environment because it can respond to corruption in addition to congestion, it implements a TCP window-scaling option, and it uses selective negative acknowledgments.

The Security Protocol (SP) is based on the security protocol at Layer 3 (SP3) and the network-layer security protocol (NLSP) with reduced overhead. SP does not have a corresponding layer in the OSI sense. It operates between the network and transport layers (Layers 3 and 4).

The Network Protocol (NP) is a network-layer protocol (Layer 3 in the OSI model) developed to be a bit-efficient, scalable protocol for a broad range of spacecraft environments. Among other things, NP provides for a selectable routing method, connectionless and managed-connection operations, corruption and congestion signaling to TP, and handling of packet precedence.

Four MIL-STDs have been developed and approved for the SCPS protocol suite. The emerging MIL-STDs include:

- [MIL-STD-2045-44000](#): Department of Defense Interface Standard: Transport Protocol for High-Stress, Resource-Constrained Environments, 30 September 1997. 
- [MIL-STD-2045-43000](#): Department of Defense Interface Standard: Network Protocol for High-Stress, Resource-Constrained Environments, 30 September 1997. 
- [MIL-STD-2045-47000](#): Department of Defense Interface Standard: File and Record Transfer Protocol for Resource-Constrained Environments, 30 September 1997. 
- [MIL-STD-2045-43001](#): Department of Defense Interface Standard: Network Security Protocol for Resource-Constrained Environments, 30 September 1997. 

### 2.3.3.2 Network Standards

**Wireless LAN.** The IEEE 802.11 Wireless LAN protocol was finalized in June 1997 as IEEE 802.11-1997 Part II: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications. It provides a common set of operational rules for airwave interoperability of wireless LAN products from different vendors. It specifies both direct-sequence spread-spectrum and frequency-hopping spread-spectrum physical layers for wireless radio-based LANs. Also, it includes infrared connectivity technologies. An Inter Access Point protocol is being developed to provide a standardized method for communications between wireless LAN access points.

**ATM-Related Standards.** The ATM Forum has developed new Version 4.0 standards for signaling ABR addendum (af-sig-0076.000), and traffic management ABR addendum (af-tm-0077.000). Since ATM is essentially a packet- rather than circuit-oriented transmission technology,

it must emulate circuit characteristics in order to provide support for CBR or “circuit” (voice and telephony) traffic over ATM. For voice and telephony, ATM trunking using AAL1 for narrowband Services Version 1.0, af-vtoa-0089.000 was approved. For ATM security services, af-sec-0096.000, ATM Security Framework Specification, V1.0 was recently approved. For voice applications requiring bandwidth efficiency, af-vtoa-0113.000, ATM Trunking Using AAL2 for Narrowband Services was recently approved. For bandwidth limited tactical interfaces, the following standard is emerging:

- [af-vtoa-0119.00](#), Low Speed Circuit Emulation Service, May 1999.

LANE Version 2.0 LANE UNI (LUNI) specification was recently approved by the ATM Forum. The LANE Version 2.0 LUNI, af-lane-0084.000, standardizes the interface between the LANE client (the LEC) and the LANE Server (the LES, LECS, and BUS).

ATM Conformance Testing: ATM Forum’s conformance test suites—Protocol Information Conformance Statement (PICS) pro forma and the Protocol Implementation Extra Information for Testing (Pixit) pro forma—are available to demonstrate interoperability between vendor products.

**Gigabit Ethernet.** Gigabit Ethernet provides service at 1,000 Mbps. For physical layer and framing requirements, IEEE 802.3-1998, Local and Metropolitan Area Networks-Specific Requirements-Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications, and IEEE 802.3z-1998, Media Access Control (MAC) Parameters, Physical Layers, Repeater, and Management Parameters for 1000Mbps Operation, Type 1000BASE-X (Clauses 34-42) should be employed. The approved standard includes physical media types 1000Base-SX multimode fiber, 1000Base-LX single mode fiber, and 1000Base-CX. Work is continuing on 1000Base-T.

**Personal Communications Services and Mobile Cellular.** Personal Communications Services (PCS) will support both terminal mobility and personal mobility. Terminal mobility is based on wireless access to the public switched telephone network (PSTN). Personal mobility allows users of telecommunications services to gain access to these services from any convenient terminal (either wireline or wireless). Mobile cellular radio can be regarded as an early form of “personal communications service” allowing subscribers to place and receive telephone calls over the PSTN wherever cellular service is provided. The three predominant competing worldwide methods for digital PCS and Mobile Cellular access are: Code Division Multiple Access (CDMA), Time Division Multiple Access (TDMA), and Global System for Mobile Communications (GSM). Of these three, CDMA offers the best technical advantages for military applications based on its utilization of Direct Sequence Spread Spectrum (DSSS) techniques for increased channel capacity, low probability of intercept (LPI), and protection against jamming. CDMA’s low transmission power requirements should also reduce portable power consumption. The PCS standard for CDMA is J-STD-008. The Mobile Cellular standard for CDMA is EIA/TIA-95-B. In North America, the standard signaling protocol for CDMA and TDMA mobile cellular is EIA/TIA-41-D. It should be recognized that for Operations-Other-Than-War (OOTW), a user may require support of multiple protocols to access region-specific international digital PCS/Mobile Cellular infrastructures.

**International Mobile Telecommunications – 2000.** *International Mobile Telecommunications – 2000* (IMT-2000) defines third-generation mobile systems scheduled to start service around the year 2000, subject to market conditions. Also known as Future Public Land Mobile Telecommunications Systems (FPLMTS), these systems will provide access by means of one or more radio links to a wide variety of telecommunication services supported by the fixed and mobile telecommunications networks (e.g., PSTN/ISDN) and to other services that may be unique to IMT-2000. A range of mobile terminal types, designed for mobile and fixed use, is envisaged linking to terrestrial- and/or satellite-based networks. A goal for third-generation mobile systems is to provide global coverage and to enable terminals to be capable of seamless roaming between multiple networks. The ability to coexist and work with pre-IMT-2000 systems is required. Evaluation of the submitted IMT-2000 Radio Transmission Technologies (RTT) was completed 17 March 1999 and resulted in Recommendation ITU-R M.(IMT-RKEY) containing the key technical characteristics to be used in the IMT-2000 radio standard. IMT-RKEY was then used as input to begin developing Recommendation ITU-R M.(IMT-RSPC) on the radio interfaces for IMT-2000. The work is proceeding with the view of seeking a single standard for the terrestrial component of IMT-2000 encompassing two high-level technology groupings: CDMA and TDMA. Determination of IMT-RSPC is expected by the end of 1999.

**Point-to-Point Standards.** IETF draft standard IETF RFC 1990, PPP Multilink Protocol, allows for aggregation of bandwidth via multiple simultaneous dial-up connections. It proposes a method for splitting, recombining, and sequencing datagrams across multiple PPP links connecting two systems.

### 2.3.3.3 Military Satellite Communications

**SHF Satellite Terminal Standards.** The following draft standards are under development: MIL-STD-188-166 (Interface Standard, Interoperability and Performance Standard for SHF SATCOM Link Control), MIL-STD-188-167 (Interface Standard, Message Format for SHF SATCOM Link Control), and MIL-STD-188-168 (Interface Standard, Interoperability and Performance Standards for SHF Satellite Communications Multiplexers and Demultiplexers).

### 2.3.3.4 Radio Communications

**Link 22 Transmission Standards.** Link 22 Transmission media will be used to exchange Link 22 messages. Link 22 messages, composed of F-Series formats, will be used for the exchange of maritime operational data between tactical data systems using line of sight (UHF) and beyond line of sight (HF) bands. The standard for Link 22 waveform is under development.















**VHF.** MIL-STD-188-241, RF Interface Requirements for VHF Frequency Hopping Tactical Radio Systems, is a classified document currently under development. This standard identifies the anti-jamming capabilities for VHF radio systems.

### 2.3.3.5 Network Management

**Simple Network Management Protocol Version 3 (SNMPv3).** The SNMPv3 Management Framework is described in IETF-Proposed Standard RFCs 2271-2275. SNMPv3 builds on the mandate SNMPv1 and addresses the deficiencies in SNMPv2 relating to security (e.g., authentication and privacy) and administration (e.g., naming of entities, usernames and key

management, and proxy relationships). Implementations of the RFCs are undergoing interoperability tests as part of the process to advance these specifications from Proposed to Draft state.

**Network Management Systems for Data Communications.** The following SNMP MIB modules are identified as emerging IETF standards for implementation within systems that manage data communications networks:

- [IETF RFC-1695](#), Definitions of Management Objects for ATM Management version 8.0 using SMIV2, August 1994. 
- [IETF RFC-1657](#), Definitions of Management Objects for the Fourth Version of the Border Gateway Protocol (BGP-4) using SMIv2, July 1994. 
- [IETF RFC 1611](#), DNS Server MIB Extensions, May 1994. 
- [IETF RFC 1612](#), DNS Resolver MIB Extensions, May 1994.
- [IETF RFCs 2006](#), Definitions of Managed objects for IP Mobility Support using SMIv2, October 1996. 
- [IETF RFC 2011](#), SNMPv2 Management Information Base for the Internet Protocol, November 1996.
- [IETF RFC-1471](#), Definitions of Managed Objects for the Link Control Protocol of the Point-to-Point Protocol, June 1993. 
- [IETF RFC-1472](#), Definitions of Managed Objects for the Security Protocol of the Point-to-Point Protocol, June 1993. 
- [IETF RFC 1473](#), Definitions of Managed Objects for the IP Network Control Protocol of the Point-to-Point Protocol, June 1993. 
- [IETF RFC 1474](#), Definitions of Managed Objects for the Bridge Network Control Protocol of the Point-to-Point Protocol, June 1993. 
- [IETF RFC-2021](#), Remote Network Monitoring Management Information Base Version 2, using SMIv2, January 1997. 
- [IETF RFC 2012](#), SNMPv2 Management Information Base for the Transmission Control Protocol (TCP), November 1996. 
- [IETF RFC-2013](#), SNMPv2 Management Information Base for the User Datagram Protocol (UDP), November 1996. 
- [IETF RFC-1567](#), X.500 Directory Monitoring MIB, January 1994. 
- [IETF RFC-2248](#), Network Services Monitoring MIB, January 1998. 
- [IETF RFC-2249](#), Mail Monitoring MIB, January 1998. 

Page intentionally left blank.

## Section 2.4: Information-Modeling, Metadata, and Information-Exchange Standards

### 2.4.1 Introduction

#### 2.4.1.1 Purpose

This section specifies the minimum information-modeling, metadata, and information-exchange standards DoD will use to develop or upgrade integrated, interoperable systems that directly or indirectly support the warfighter.

#### 2.4.1.2 Scope

This section applies to activity models, data models, object models and data definitions used to define physical databases, and formatted messages used to exchange information among systems.

Security standards related to this section are in [Section 2.6.2.4](#).

#### 2.4.1.3 Background

An information model is a representation at one or more levels of abstraction of a set of real-world activities, products, and/or interfaces. Within the Information System (IS) domain, there are three basic types of models frequently created: activity, data, and object.

**Activity Models** are representations of mission-area applications, composed of one or more related activities. The primary product of each activity model is the definition of a measurable set of products and services required to support the mission area function. An activity model is also referred to as a function or process model.

**Data Models**, developed from the information requirements documented in the activity model, define entities, their data elements, and illustrate the interrelationships among the entities. A data model identifies the logical information requirements and metadata, applicable to persistently stored data, which form a basis for physical database schemata and standard data elements within a relational database.

**Object Models** define the combined information and process requirements within a domain needed to accomplish a particular capability or set of capabilities, for example, as defined by activity models. Such models form the basis of object-oriented system implementations. They also model system interoperability by combining the metadata for shared data with the allowable interfaces for sharing that data. Such models show associations and dependencies between system interfaces and the essential business rules for exercising those relationships.

In order to provide an authoritative source for DoD data standards, DoD created the Defense Data Dictionary System (DDDS). The DDDS, managed by DISA, is a DoD-wide central database that includes standard names and definitions for data entities and data elements (i.e., attributes). The DDDS server also provides password-protected access to DoD standard data models. The DDDS is used to collect individual data standards derived from the DoD data model (DDM) and to document content and format for data elements. A classified version of the DDDS, known as the

Secure Intelligence Data Repository (SIDR), has been developed to support standardization of classified data elements and domains. System developers use these repositories as a primary source of data element standards.

Information-exchange is accomplished for the most part by sending formatted messages. The definition and documentation of these exchange mechanisms are provided by various messaging standards. Each message standard provides a means to define message form and functions (i.e., transfer syntax), which includes the definition of the message elements contained in each message. The message fields, which are currently defined in the various message standards, are not necessarily mutually consistent, nor are they consistently based on any activity or data models either within a message system or across message systems. Newer techniques provide more direct exchange of data without the user following a rigid format. A model-based structure will provide definitions that will be data element-based and will be compliant with DoD data element standards established in accordance with DoD Directive (DoDD) 8320.1, Data Administration, and associated DoD 8320.1 manuals.

Efficient execution of information exchange requirements (IERs) throughout the joint battlespace is key to evolving DoD toward the ultimate goal of seamless information exchange. The primary component of this infrastructure is the Tactical Data Link (TDL), composed of message elements/messages and physical media. However, due to the diversity of warfighter requirements, no single data link is applicable to every platform and weapon system.

Tactical Digital Information Links (TADILs), structured on bit-oriented message standards, evolved to meet critical real-time and near-real-time message requirements. The United States Message Text Format (USMTF), designed primarily for non-real-time exchange, is based on a character-oriented message format and is the standard for human-readable and machine-processable information exchange. The goal of TDLs, character-oriented/human-readable (USMTF messages), imagery, voice, and video standards is to provide a timely, integrated, and coherent picture for joint commanders and their operational forces.

Disparate data link message formats and communications media have resulted in late delivery of crucial battlefield information. This causes significant interoperability problems among the Commanders-in-Chief (CINCs), Services, Agencies (C/S/A), and allied nations. Currently, it is difficult to establish seamless information flow among diverse data-link units. Future joint operations, such as ballistic missile defense and battlefield digitization, will place greater emphasis on the need for automated C4I functions. Tomorrow's battlefields will vastly increase the burden on networks.

## **2.4.2 Mandated Standards**

This subsection identifies the mandatory standards, profiles, and practices for information-modeling, metadata, and information-exchange standards.

### **2.4.2.1 Activity Modeling**

Activity models are used to document/model the activities, processes, and data flows supporting the requirements of process improvement and system development activities. Prior to system development or major system update, an activity model is prepared to depict the mission-area



function to a level of detail sufficient to identify each entity in the data model that is involved in an activity. The activity model can form the basis for data and/or object model development or refinement. It is validated against the requirements and doctrine, and approved by the operational sponsor. IEEE P1320.1, IDEF0 Function Modeling, is the standard that describes the IDEF0 modeling language semantics and syntax, as well as associated rules and techniques, for developing structured graphical representations of a system or enterprise.


The mandated standard for activity modeling is:

- [IEEE 1320.1-1998](#), IEEE Standard for Functional Modeling Language-Syntax and Semantics for IDEF0.


#### **2.4.2.2 Data Modeling**

Relational data models are used in software requirements analyses and design activities as a logical basis for physical data exchange and shared data structures that can benefit from a relational schema definition, including message formats and schema for shared databases. Object-oriented systems use data models to design relational data structures when there is a requirement to maintain persistent data storage for that system in a relational database. IDEF1X is used to produce a graphical information model, which represents the structure and semantics of information within an environment or system. FIPS PUB 184 is the standard that describes the IDEF1X modeling language (semantics and syntax) and associated rules and techniques for developing a logical model of data. Use of this standard permits the construction of semantic data models, which support the management of data as a resource, the integration of information systems, and the building of relational databases.

System engineering methodology internal to a system is unrestricted. The mandated standard for Data Modeling is:

- [FIPS PUB 184](#), Integration Definition For Information Modeling (IDEF1X), December 1993. 

#### **2.4.2.3 DoD Data Model Implementation**

The DoD Data Model (DDM) is a Department-wide logical data model, which provides the standard definition and use of specific data elements to the developers of all DoD systems. Tactical systems must incorporate applicable C2 Core Data Model (C2CDM) elements. The C2CDM is a subset of the DDM. Implementation of the DDM will be interpreted to mean that the DDM will serve as the logical reference model database schema defining the names, representations, and generalized relations of data within DoD systems. System developers comply by using this reference model database schema as a guide to reusable data structures that can form the basis of their own physical database schemas. Developers of new and existing systems will maintain traceability between data structures used in their physical database schemas and the DDM, by registering both the reuse of the data standards in the DDDS and the development/adoption of additional data structures. Information regarding access to the DDM can be obtained from the DoD Data Administration Web home page at <http://www-datadmin.itsi.disa.mil/>. 



Adherence to the DDM for shared or sharable data will aid DoD Agencies in developing interoperability among all information systems. The shared or sharable information requirements of a new or major system upgrade that are to be persistently stored in a relational or object-relational database will be documented within a data model based on the DDM. New information requirements for shared data are submitted by DoD Components and approved by functional data stewards in accordance with DoD Manual 8320.1-M-1, DoD Data Standardization Procedures. These information requirements will be used to extend the DDM, as appropriate. System engineering methodology internal to a system is unrestricted. The following standard for DDM implementation is mandated:

- [DoD Manual 8320.1-M-1](#), DoD Data Standardization Procedures, April 1998. 

#### 2.4.2.4 DoD Data Definitions




The Defense Data Dictionary System (DDDS) is a central database that includes standard data entities, data elements, and provides access to DDM files from the DDDS server. The procedures for preparing and submitting data definitions and data models for standardization are covered in DoD Manual 8320.1-M-1. A classified version of the DDDS, Secure Intelligence Data Repository (SIDR), has been developed to support standardization of classified data elements and domains. System developers shall use these repositories as a primary source of data element standards.

The mandated standards for DoD Data Definitions are

- [DoD Manual 8320.1-M-1](#), DoD Data Standardization Procedures, April 1998. 
- [Defense Data Dictionary System \(DDDS\)](#). 
- [Secure Intelligence Data Repository \(SIDR\)](#).

##### 2.4.2.4.1 DoD Date Standards

In order to ensure the unambiguous exchange of date data between systems before, during, and past the year 2000, database design and data modeling shall adhere to DoD date data standards. For external exchange of character dates between systems not using a standardized message or transaction format, the mandated standards are:

- [Calendar Date](#): DDDS Counter ID # 195  
Format: YYYYMMDD (8-digit contiguous)  
Where: YYYY = year; MM = month; DD = day  
(Also referenced in ISO 8601, ANSI X3.30, and FIPS 4-1). 
- [Ordinal Date](#): DDDS Counter ID # 165  
Format: YYYYDDD (7-digit contiguous)  
Where: YYYY = year; DDD = ordinal day within year  
(Also referenced in ISO 8601). 
- [Year Date](#): DDDS Counter ID #166  
Format: YYYY (4-digit contiguous)  
Where: YYYY = year  
(Also referenced in ISO 8601). 

### 2.4.2.5 Information-Exchange Standards

#### 2.4.2.5.1 Information-Exchange Standards Applicability

Information-Exchange Standards refer to the exchange of information among mission-area applications within the same system or among different systems. The scope of information-exchange standards follows:

- The exchange of information among applications using shared databases or formatted message structures shall be based on the logical data models developed from identifying information requirements through activity models, where appropriate. The data model identifies the logical information requirements, which shall be developed into physical database schemata and standard data elements.
- The standard data elements shall be exchanged using the data-management, data interchange, and distributed-computing services of application platforms. (Refer to [Section 2.2](#) for further guidance on these services.) The goal is to exchange information directly between information systems, subject to security classification considerations.
- Information exchange between systems using object-oriented interface definitions can be based on object models depicting those interfaces and the functional dependency of those interfaces. With object models, standard data elements are typically associated with the atomic data attributes that represent shared data.

Interchange standards help form the Defense Information Infrastructure (DII) Common Operating Environment (COE), ensuring the use of system or application formats that can share data. Key references include [Section 2.2.2.2.1.3](#), for SQL standards in Data Management Services and [Section 2.2.2.2.1.4](#) for Data Interchange Services.

In distributed databases, other types of data messaging may be used as long as they remain DDDS-compliant.

#### 2.4.2.5.2 Tactical Information-Exchange Standards




The message standards below are joint/combined message standards that provide for the formatted transfer of information between systems. Although it must be recognized that the J-Series Family of TDLs and the USMTF Standards are not model-based and therefore do not meet the goals of standard information exchange, they must be recognized as existing standards. As more systems are developed using logical data models and standard data elements, these message standards must evolve to be data model-based if they are to continue to support joint automated systems. In distributed databases, other types of data messaging may be used as long as they remain DDDS-compliant.


##### 2.4.2.5.2.1 Bit-Oriented Formatted Messages

The J-Series Family of TADILs allows information exchange using common data element structures and message formats that support time-critical information. They include Air Operations/Defense Maritime, Fire Support, and Maneuver Operations. These are the primary data links for exchange of bit-oriented information. The family consists of LINK 16, LINK 22, and the

Joint Variable Message Format (VMF), and interoperability is achieved through use of J-Series family messages and data elements. The policy and management of this family are described in the Joint Tactical Data Link Management Plan (JTDLMP), dated 6 June 1996.

New message requirements shall use these messages and data elements or use the message construction hierarchy described in the JTDLMP. The mandated standards for information exchange are:

- [MIL-STD-6016A](#), Tactical Digital Information Link (TADIL) J Message Standard, 30 April 1999. 
- [STANAG 5516](#), Edition 1, Tactical Data Exchange – LINK 16, Ratified 15 January 1997. 
- [Variable Message Format \(VMF\)](#), Technical Interface Design Plan (Test Edition) Reissue 3, 17 June 1998. 

Note: Between publications of the above mandated standards, the TADIL Interface Change Proposals (ICPs) status report lists changes to the standards. Once a TADIL ICP has the status “approved and awaiting incorporation,” it is approved for implementation. The TADIL ICP Status Report is located at: <http://www-tadil.itsi.disa.mil/index.htm>. 

#### **2.4.2.5.2.2 Character-Based Formatted Messages**

United States Message Text Format (USMTF) messages are jointly agreed, fixed-format, character-oriented messages that are human-readable and machine-processable. USMTFs are the mandatory standard for record messages when communicating with the Joint Staff, Combatant Commands, and Service Components. The mandated standard for USMTF Messages is:

- [MIL-STD-6040](#), United States Message Text Format (USMTF), 31 March 1999. 

Note: Per Service agreement, the next version of USMTF will take effect again in March 2000.

### **2.4.3 Emerging Standards**

The emerging standards listed in this subsection are expected to be elevated to mandatory status when implementations of the standards mature.

#### **2.4.3.1 Object Modeling**

Object-oriented modeling techniques are used in the specification and development of object-oriented systems and to model and design the interoperability requirements of distributed components.

The emerging standards for object modeling are IDEF1X97, Conceptual Schema Modeling and the Unified Modeling Language (UML) Version 1.3.

IDEF1X97 is being developed by the IEEE IDEF1X Standards Working group of the IEEE 1320.2 Standards Committee. The standard describes two styles of the IDEF1X model. The *key-style* is used to produce information models that represent the structure and semantics of data within an enterprise and is backward-compatible with the U.S. Government’s Federal Standard for IDEF1X, FIPS 184. The *identity-style* is a wholly new language that provides system designers and

developers with a robust set of modeling capabilities covering all static and many dynamic aspects of the emerging object model. This identity-style can, with suitable automation support, be used to develop a model that is an executable prototype of the target object-oriented system. The identity-style can be used in conjunction with emerging dynamic modeling techniques to produce full object-oriented models. The following standard is emerging:

- [IEEE 1320.2-1998](#), IEEE Standard Conceptual Modeling Language-Syntax and Semantics for IDEF1X97 (IDEFObject).

UML is a language for specifying, constructing, visualizing, and documenting the artifacts of a software-intensive system. In an elaborative approach, developers develop models and increasingly add details until the model becomes the actual system being developed. Information may be obtained from the Web at <http://www.omg.org>. The following standard is emerging:


- [Object Management Group \(OMG\) Unified Modeling Language \(UML\) Specification](#), Version 1.3, June 1999.

#### 2.4.3.2 DoD Data Definitions

The DISA Joint Information Engineering Organization (JIEO), in coordination with the Standards Coordinating Committee (SCC) and the Change Control Board (CCB), will develop the strategy/policy for migration from many tactical data-link (bit-oriented) and character-oriented joint message standards to a minimal family of DoD 8320.1-compliant information-exchange standards. A normalized unified data/message element dictionary will be developed based on normalized Data Model and associated data element standards. The dictionary will support both character- and bit-oriented representation of the standard data and their domain values. Message standards will then establish the syntax for standard data packaging to support mission requirements (e.g., character- or bit-oriented, fixed or variable format, etc.). The unified data dictionary will ensure that multiple representations are minimized and transformation algorithms are standardized. The Data Model basis for the data elements will ensure that the information is normalized.

#### 2.4.3.3 Information-Exchange Standards

The emerging standards for information exchange are:

- [Multi-functional Information Distribution System \(MIDS\)](#). MIDS is a planned replacement for the Joint Tactical Information Distribution System (JTIDS). MIDS will provide secure jam-resistant communications, utilizing tactical digital data and voice. Message format standards for MIDS will not change from those of the JTIDS.
- [STANAG 5522](#), Edition 1, Tactical Data Exchange – LINK 22 (Undated) is the Multinational Group (MG) agreed Configuration Management (CM) baseline document as of 15 September 1995. It is distributed as ADSIA(DLWG)-RCU-C-74-95. 

Page intentionally left blank.

## **Section 2.5: Human-Computer Interface Standards**

### **2.5.1 Introduction**

#### **2.5.1.1 Purpose**

This section provides a common framework for Human-Computer Interface (HCI) design and implementation in DoD automated systems. The objective is to standardize user interface design and implementation options thus enabling DoD applications within a given domain to appear and behave consistently. The standardization of HCI appearance and behavior within DoD will result in higher productivity; shorter training time; and reduced development, operation, and support costs.

#### **2.5.1.2 Scope**

This section addresses the presentation and dialogue of the Human-Computer Interface. [Section 2.2](#) addresses the API definitions and protocols. See JTA [Section 2.6.2.5](#) and Appendix A of the DoD HCI Style Guide, Security Presentation Guidelines, and other applicable portions of the DoD HCI Style Guide for HCI Security.

#### **2.5.1.3 Background**

The objective of system design is to ensure system reliability and effectiveness. To achieve this objective, the human must be able to effectively interact with the system. Humans interact with automated systems using the HCI. The HCI includes the appearance and behavior of the interface, physical interaction devices, graphical interaction objects, and other human-computer interaction methods. A good HCI is both easy to use and appropriate to the operational environment. It exhibits a combination of user-oriented characteristics such as intuitive operation, ease and retention of learning, facilitation of user task performance, and consistency with user expectations.

The need to learn the appearance and behavior of different HCIs used by different applications and systems increases both the training burden and the probability of operator error. What is required are interfaces that exhibit a consistent appearance and behavior both within and across applications and systems.

### **2.5.2 Mandated Standards**

This subsection identifies the mandatory standards, profiles, and practices for human-computer interfaces. Each mandated standard or practice is clearly identified on a separate bulleted line and includes a formal reference that can be included within Requests for Proposals (RFPs) or Statements of Work (SOWs). Appendix B contains a table that summarizes the mandated standards from this section and provides information on how to obtain the standards.

#### **2.5.2.1 General**

The predominant types of HCIs include graphical user interfaces (GUIs) and character-based interfaces. For all DoD automated systems, the near-term goal is to convert character-based interfaces to GUIs. Although GUIs are the preferred user interface, some specialized devices may require use of character-based interfaces due to operational, technical, or physical constraints.



These specialized interfaces shall be defined by domain-level style guides and further detailed in system-level user interface specifications. In order to present a consistent interface to the user, application software shall not mix command line user interfaces and GUIs.

#### 2.5.2.1.1 Character-Based Interfaces

The following, found at <http://www-library.itsi.disa.mil/tafim.html> is mandated for systems with an approved requirement for a character-based interface:

- [DoD Human-Computer Interface Style Guide](#), 30 April 1996. 

While not mandated, additional guidance for developing character-based interfaces can be found in ESD-TR-86-278, Guidelines for Designing User Interface Software (Smith and Mosier 1986).

#### 2.5.2.1.2 Graphical User Interface

When developing DoD automated systems, the graphical user interface shall be based on one commercial user interface style guide consistent with Section 2.5.2.2.1. Hybrid GUIs that mix user interface styles (e.g., Motif with Microsoft Windows) shall not be created. A hybrid GUI is composed of toolkit components from more than one user interface style. When selecting commercial off-the-shelf (COTS)/Government off-the-shelf (GOTS) applications for integration with developed DoD automated systems, maintaining consistency in the user interface style is highly recommended. An application delivers the user interface style that matches the host platform (i.e., Motif on a UNIX platform and Windows on an NT platform). This style conforms to commercial standards, with consistency in style implementation regardless of the development environment used to render the user interface. Applications that use platform-independent languages such as Java deliver the same style as the native application on the host platform.

See [Section 2.2.2.2.1.2](#) for mandated GUI standards.

#### 2.5.2.2 GUI Style Guides

An HCI style guide is a document that specifies design rules and guidelines for the look and behavior of the user interaction with a software application or a family of software applications. The goal of a style guide is to improve human performance and reduce training requirements by ensuring consistent and usable design of the HCI across software modules, applications, and systems. The style guide represents “what” user interfaces should do in terms of appearance and behavior and can be used to derive HCI design specifications defining “how” the rules are implemented in the application code.

[Figure 2.5-1](#) illustrates the hierarchy of style guides that shall be followed to maintain consistency and good HCI design within DoD. This hierarchy, when applied according to the process mandated in DoD’s HCI Style Guide, provides a framework that supports iterative prototype-based HCI development. The process starts with top-level general guidance and uses prototyping activities to develop system-specific design rules.



The interface developer shall use the selected commercial GUI style guide and the appropriate domain-level style guide for specific style decisions, along with input of human factors specialists to create the system-specific HCI. The following paragraphs include specific guidance regarding the style guide hierarchy levels.

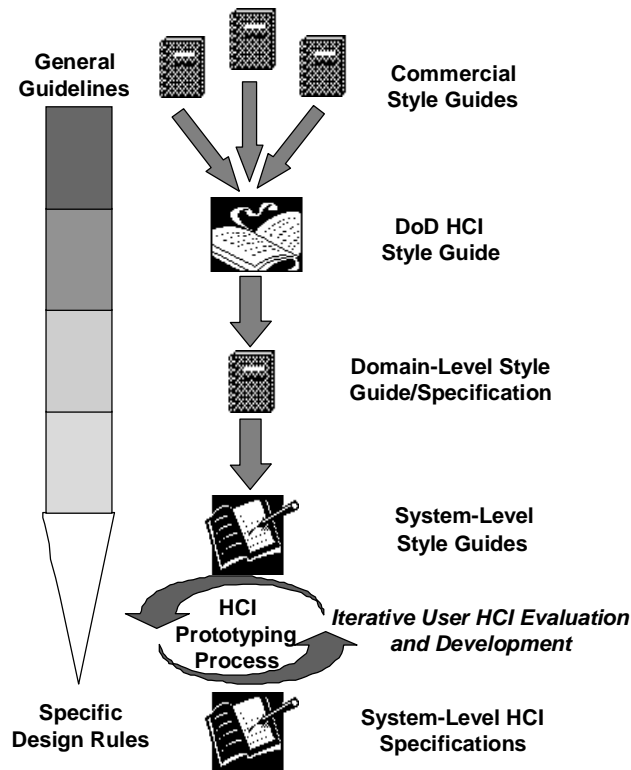


Figure 2.5-1: HCI Development Guidance

#### 2.5.2.2.1 Commercial Style Guides

A commercial GUI style shall be selected as the basis for user interface development. The GUI style selected is usually driven by the mandates specified in [Section 2.2](#) (User Interface Services and Operating System Services).

##### 2.5.2.2.1.1 X-Window Style Guides

If an X-Windows-based environment is selected, the style guide corresponding to the selected version of Motif is mandated. The following Motif style guides are mandated:

- [Open Software Foundation \(OSF\) M027](#): CDE 2.1/Motif 2.1 – Style Guide and Glossary, ISBN 1-85912-104-7, October 1997.
- [Open Software Foundation \(OSF\) M028](#): CDE 2.1/Motif 2.1 – Style Guide Certification Check List, ISBN 1-85912-109-8, October 1997.
- [Open Software Foundation \(OSF\) M029](#): CDE 2.1/Motif 2.1 – Style Guide Reference, ISBN 1-85912-114-4, October 1997.

#### 2.5.2.2.1.2 Windows Style Guide

If a Windows-based environment is selected, the following is mandated:

- “The [Windows Interface Guidelines](#) for Software Design,” Microsoft Press, 1995. 

#### 2.5.2.2.2 DoD Human-Computer Interface Style Guide


The DoD HCI Style Guide is a high-level document providing consistency across DoD systems without undue constraint on domain- and system-level implementation. The DoD HCI Style Guide was developed as a guideline document presenting recommendations for good Human-Computer Interface design. This document focuses on Human-Computer behavior and concentrates on elements or functional areas that apply to DoD applications. These functional areas include such things as security classification display, mapping display and manipulation, decision aids, and embedded training. This style guide, while emphasizing commercial GUIs, contains guidance that can be used for all types of systems including those employing character-based interfaces. Although the DoD HCI Style Guide is not intended to be strictly a compliance document, it does represent DoD policy. The following guideline is mandated and can be found at <http://www-library.itsi.disa.mil/tafim/tafim.html>:

- [DoD Human-Computer Interface Style Guide](#), 30 April 1996. 

The general principles given in this document apply to all interfaces; some specialized areas, however, require separate consideration. Specialized interfaces, such as those used in hand-held devices, have interface requirements that are beyond the scope of the DoD HCI Style Guide. These systems should comply with their domain-level style guide and follow the general principles and HCI design guidelines presented in the DoD HCI Style Guide.

#### 2.5.2.2.3 Domain-Level Style Guides

The JTA allows for the development of domain-level HCI style guides. These styles, when developed, will reflect the consensus on HCI appearance and behavior for a particular domain within DoD. The domain-level style guide will be the compliance document and may be supplemented by a system-level style guide. Domain-level style guides that make use of commercial standards, COTS products, graphical user interfaces, windows, and/or conventional displays should be developed as extensions to the User Interface Specification for the DII. Domain-level style guides should be complementary and nonconflicting with DoD HCI Interface and applicable commercial standards. The following domain-level style guide is mandated for HTML, Motif, and Windows-based systems:


- [User Interface Specification](#) for the Defense Information Infrastructure (DII), Version 3.0, February 1998. 

#### 2.5.2.2.4 System-Level Style Guides

System-level style guides provide the special tailoring of commercial, DoD, and domain-level style guides. These documents include explicit design guidance and rules for the system, while maintaining the appearance and behavior provided in the domain-level style guide. If needed, the Motif-based system-level style guide will be created in accordance with the User Interface Specification for the DII.


### 2.5.2.3 Symbolology

The following standard is mandated for the display of common warfighting symbology:

- [MIL-STD-2525B](#), Common Warfighting Symbology, 30 January 1999. 

### 2.5.3 Emerging Standards

The Geospatial Symbols for Digital Displays (GeoSym) specification defines the format and content of symbol graphics and symbol assignment tables. GeoSym symbols were created for use with VPF products and are designed to complement Common Warfighting Symbology (MIL-STD-2525B). For nonwarfighting, geospatial symbology, the following standard is emerging:

- [MIL-PRF-89045](#), DoD Performance Specification Geospatial Symbols for Digital Displays (GeoSym™), 20 February 1998. 

Currently, research is underway to investigate nontraditional user interfaces. Such interfaces may be gesture-based and may involve processing multiple input sources, such as voice and spatial monitors. Ongoing research and investigation includes the use of virtual reality and interface agents. Interface agents autonomously act on behalf of the user to perform various functions, thus allowing the user to focus on the control of the task domain. DoD will integrate standards for nontraditional user interfaces as research matures and commercial standards are developed.

Work to standardize data labeling for classified electronic and hardcopy documents is in progress. The results of this effort will replace the labeling standards currently appearing in Appendix A of the DoD HCI Style Guide, 30 April 1996.

Page intentionally left blank.

## **Section 2.6: Information-Security Standards**

### **2.6.1 Introduction**

#### **2.6.1.1 Purpose**

This section provides the information-security standards necessary to implement security at the required level of protection.

#### **2.6.1.2 Scope**

The standards mandated in this section apply to all DoD information-technology systems. This section provides the security standards applicable to information processing, transfer, modeling, metadata, exchange, and Human-Computer Interfaces (HCI). This section also addresses standards for security audit and key management mechanisms. [Section 2.6.2](#) addresses mandated security standards, and [Section 2.6.3](#) addresses emerging security standards.

#### **2.6.1.3 Background**

Interoperability requires seamless information flow at all levels of information classification without compromising security. The goal is to protect information at multiple levels of security, recognizing that today's DoD systems are "islands" of system-high solutions.

The concept of security assurance provides confidence that the security features do what they are supposed to do, and that they do not do what they are not supposed to do. While assurance has been largely associated with product security, it is an equally important concept applied to system security since it is unlikely that integrated products will retain their individual assurance characteristics.

Systems that process sensitive data must be certified and accredited before use. Certification is the technical evaluation of security features and other safeguards, made in support of the accreditation. Accreditation is the authorization by the Designated Approving Authority (DAA) that an information system may be placed into operation. By authorizing a system to be placed into operation, the DAA is declaring that the system is operating under an "acceptable level of risk." Therefore, system developers should open dialog with the Certifier and DAA concurrently with their use of the Joint Technical Architecture (JTA), as DAA decisions can affect the applicability of standards within specific environments. The DoD Information Technology Security Certification and Accreditation Process (DITSCAP) is DODI 5200.40, dated 30 December 1997.

DoD systems should have adequate safeguards to enforce DoD security policies and system security procedures. System safeguards should provide adequate protection from user attempts to circumvent system access control, accountability, or procedures for the purpose of performing unauthorized system operations.

Security requirements and engineering should be determined in the initial phases of design. The determination of security services to be used and the strength of the mechanisms providing the services are primary aspects of developing the specific security architectures to support specific

domains. Section 2.6 of the JTA is used after operational architectural decisions are made regarding the security services needed and the required strengths of protection of the mechanisms providing those services.

The proper selection of standards can also provide a basis for improved information protection. Although few specific standards for the general topic of “information protection” exist within Defensive Information Warfare, selecting standards with security-relevant content contributes to the overall improvement of the security posture of information systems.

## **2.6.2 Mandated Standards**

This subsection identifies the mandatory standards, profiles, and practices for information-security standards. Each mandated standard or practice is clearly identified on a separate bulleted line and includes a formal reference that can be included within Requests for Proposals (RFPs) or Statements of Work (SOWs). Appendix B contains a table summarizing the mandated standards from this section, as well as providing information on how to obtain the standards.

### **2.6.2.1 Introduction**



This section contains the mandatory information-systems security standards and protocols that shall be implemented in systems that have a need for the corresponding interoperability-related services. If a service is to be implemented, then it shall be implemented at the required level of protection using the associated security standards in this section. If a service is specified by more than one standard, the appropriate standard should be selected based on system requirements. Section 2.6.2 is structured to mirror the overall organization of the JTA so that readers can easily link security topics with the related subject area in the sections of the JTA (information processing; information transfer; information modeling, metadata, and information exchange; and human-computer interface) and their sub-sections.

### **2.6.2.2 Information-Processing Security Standards**



Technical evaluation criteria to support information-processing security policy, and evaluation and approval, disapproval, and accreditation responsibilities are promulgated by DoD Directive (DoDD) 5200.28.

#### **2.6.2.2.1 Application Software Entity Security Standards**

The following standards are mandated for the development and acquisition of application software consistent with the required level of trust:

- [DoD 5200.28-STD](#), The DoD Trusted Computer System Evaluation Criteria, December 1985. 
- [NCSC-TG-021](#), Version 1, Trusted Database Management System Interpretation, April 1991. 

If FORTEZZA services are used, the following standards are mandated:


- [FORTEZZA Application](#) Implementers' Guide, MD4002101-1.52, 5 March 1996. 
- [FORTEZZA Cryptologic](#) Interface Programmers' Guide, MD4000501-1.52b, 20 October 1997. 

#### 2.6.2.2.2 Application Platform Entity Security Standards

For the application platform entity, security standards are mandated for data-management services and operating-system services. Security is an important part of other application platform service areas, but there are no standards for the other service areas.


##### 2.6.2.2.2.1 Data Management Services

The following standard is mandated for data management services consistent with the required level of trust:

- [NCSC-TG-021](#), Version 1, Trusted Database Management System Interpretation, April 1991. 

##### 2.6.2.2.2.2 Operating-System Services Security


For the application platform entity, the following standard is mandated for the acquisition of operating systems consistent with the required level of trust in accordance with DoDD 5200.28:

- [DoD 5200.28-STD](#), The DoD Trusted Computer System Evaluation Criteria, December 1985. 

##### 2.6.2.2.2.2.1 Security-Auditing and Security-Alarm Reporting Standards


Security auditing is a review or examination of records and activities to test controls, ensure compliance with policies and procedures, detect breaches in security, and indicate changes in operation. Security-alarm reporting is the capability to receive notifications of security-related events; alerts of any misoperations of security services and mechanisms; alerts of attacks on system security; and information as to the perceived severity of any misoperation, attack, or breach of security.

The following standard is mandated for security auditing or alarm reporting:

- [DoD 5200.28-STD](#), The DoD Trusted Computer System Evaluation Criteria, December 1985. 

##### 2.6.2.2.2.2.2 Authentication Security Standards

Authentication supports tracing security-relevant events to individual users. If Open Software Foundation DCE Version 1.1 is used, the following authentication standard is mandated:

- [IETF RFC-1510](#), The Kerberos Network Authentication Service, Version 5, 10 September 1993. 

If DCE Version 1.1 is not used, the following authentication standard is mandated:

- [\[Federal Information-Processing Standard Publications\] \(FIPS-PUB 112\)](#), Password Usage, 30 May 1985. 

Additional guidance documents: NCSC-TG-017 – A Guide to Understanding Identification and Authentication in Trusted Systems: CSC-STD-002 DoD Password Management Guidance.

### 2.6.2.3 Information-Transfer Security Standards

This section discusses the security standards that shall be used when implementing information-transfer security services. Security standards are mandated for the following information-transfer areas: end-system (host standards), and network (internetworking standards).



#### 2.6.2.3.1 End-System Security Standards

Security standards for host end-systems are included in the following subsections.

##### 2.6.2.3.1.1 Host Security Standards

Host end-system security standards include security algorithms, security protocols, and evaluation criteria. The first-generation FORTEZZA Cryptographic Card is designed to protect information in messaging and other applications.

For systems required to interface with Defense Message System for Organizational Messaging, the following standards are mandated:

- [FORTEZZA Interface](#) Control Document, Revision P1.5, 22 December 1994. 
- [FIPS-PUB 140-1](#), Security Requirements for Cryptographic Modules, 11 January 1994. 

##### 2.6.2.3.1.1.1 Security Algorithms

To achieve interoperability, products must support a common transport protocol. Transport protocols must agree on a common cryptographic message syntax, cryptographic algorithms, and modes of operations (e.g., cipher block chaining). Transport protocols support negotiation mechanisms for selecting common syntax, algorithms, and modes of operation.


The following paragraphs identify security standards that shall be used for the identified types of cryptographic algorithms. If message digest or hash algorithms are required, Key Recovery will be implemented in a certificate management hierarchy. In FORTEZZA applications the following standards are mandated. Note: The Hash function provides a check for data integrity.

- [FIPS PUB 180-1](#), Secure Hash Algorithm-1, April 1995.
- [FIPS PUB 186-1](#), Digital Signature Standard (DSS) Digital Signature Algorithm (DSA), December 1998. 
- [FIPS PUB 185](#), SKIPJACK algorithm, February 1994, NSA, R21-TECH-044-91, 21 May 1991. 
- [R21-TECH-23-94](#), Key Exchange Algorithm (KEA), NSA, 12 July 1994.

Note: Both the Key Exchange Algorithm (KEA) and the SKIPJACK Algorithm (FIPS-185) were declassified on 23 June 1998.


##### 2.6.2.3.1.1.2 Security Protocols

The following standard is mandated for DoD systems required to exchange security attributes; for example, sensitivity labels:


- [MIL-STD-2045-48501](#), Common Security Label, 25 January 1995. 



Establishment of a certificate and key management infrastructure for digital signature is required for the successful implementation of the security architecture. This infrastructure is responsible for the proper creation, distribution, and revocation of end-users' public-key certificates. The following standard is mandated:

- [ITU-T Rec. X.509](#) (ISO/IEC 9594-8.2), Version 3, The Directory: Authentication Framework, 1997. 

The Message Security Protocol (MSP) Version 4.0 has been revised to accommodate, in part, Allied requirements. All of MSP 4.0 features have been incorporated into ACP-120, Allied Communications Publication 120, Common Security Protocol. The following messaging security protocol is mandated for DoD message systems required to exchange sensitive but unclassified and classified information:



- [ACP-120](#), Allied Communications Publication 120, Common Security Protocol (CSP), Rev A, 7 May 1998. 

The following key management protocol is mandated:

- [SDN.903](#), revision 3.2, Secure Data Network System (SDNS) Key Management Protocol (KMP), 1 August 1989.

#### **2.6.2.3.1.3 Evaluation Criteria Security Standards**

The following standards are mandated consistent with the required level of trust:

- [DoD 5200.28-STD](#), The DoD Trusted Computer System Evaluation Criteria, December 1985. 
- [NCSC-TG-005](#), Version 1, Trusted Network Interpretation, July 1987. 


#### **2.6.2.3.2 Network Security Standards**

Systems processing classified information must use Type 1 NSA-approved encryption products to provide both confidentiality and integrity security services within the network.

When network-layer security is required, the following security protocol is mandated:

- [SDN.301](#), Revision 1.5, Secure Data Network System (SDNS) Security Protocol 3 (SP3), 1989.

The following standard is mandated for DoD systems required to exchange security attributes; for example, sensitivity labels:

- [MIL-STD-2045-48501](#), Common Security Label, 25 January 1995. 

#### **2.6.2.3.3 Transmission Media Security Standards**

There are currently no security standards mandated for transmission media.

#### **2.6.2.4 Information-Modeling, Metadata, and Information-Exchange Security Standards**

At this time, no information-modeling, metadata, and information-exchange standards are mandated. Process models and data models produced should be afforded the appropriate level of protection.

#### **2.6.2.5 Human-Computer Interface Security Standards**

DoD 5200.28-STD, DoD Trusted Computer System Evaluation Criteria (TCSEC), December 1985, specifies the minimal security requirements associated with a required level of protection for DoD automated systems. HCI security-related requirements may include authentication, screen classification display, and management of access control workstation resources.

For systems employing graphical user interfaces, the following guideline is mandated and can be found at <http://www-library.itsi.disa.mil/tafim.html>:

- [DoD Human-Computer Interface Style Guide](#), 30 April 1996. 

#### **2.6.2.6 Web Security Standards**

The Secure Sockets Layer (SSL) protocol allows client/server applications to communicate in a way designed to prevent eavesdropping, tampering, or message forgery. It is currently the de facto standard used by most browsers and popular e-mail packages that are associated with the browser. RFC 2246, The TLS Protocol Version 1.0, January 1999, is an Internet Engineering Task Force (IETF) Proposed Standard and is expected to supersede SSL as a mandated standard within 2 years. Since Netscape is supporting TLS development, it is expected that there will be no further development of the SSL protocol by Netscape. The following standard is mandated:

- [Secure Sockets Layer \(SSL\) Protocol](#) Version 3.0, 18 November 1996.

### **2.6.3 Emerging Standards**

The emerging standards listed in this subsection are expected to be elevated to mandatory status when implementations of the standards mature.

#### **2.6.3.1 Introduction**

The emerging security standards described in this section are drawn from work being pursued by ISO, IEEE, IETF, Federal standards bodies, and consortia such as the Object Management Group (OMG). Section 2.6.3 is structured to mirror the overall organization of the JTA so that readers can easily link security topics with the related subject area in the sections of the JTA (information processing; information transfer; information modeling, metadata, and information exchange; and human-computer interface) and their subsections.

#### **2.6.3.2 Information-Processing Security Standards**


Information-processing security standards are emerging in applications software and application platform entity areas.

### **2.6.3.2.1 Application Software Entity Security Standards**

Emerging application software entity standards include evaluation criteria and Web security-related standards.



#### **2.6.3.2.1.1 Evaluation Criteria Security Standards**

The Evaluation Criteria for Information Technology Security (Common Criteria) represents the outcome of efforts to develop criteria for evaluation of IT security that are widely useful within the international community. It is an alignment and development of a number of the existing European, U.S., and Canadian criteria (ITSEC, TCSEC, and CTCPEC respectively). The Common Criteria resolves the conceptual and technical differences between the source criteria. It is a contribution to the development of an international standard, and it opens the way to worldwide mutual recognition of evaluation results. The following standards are emerging:

- [ISO/IEC JTC1/SC27/WG3 N304](#), 23 April 1996. 
- [FDIS 15408](#), Common Criteria, Version 2.0, October 1998.

#### **2.6.3.2.1.2 Web Security Standards**

RFC 2246, The Transport Layer Security (TLS) Protocol Version 1.0, January 1999, is an Internet Engineering Task Force (IETF)-Proposed Standard that provides communications privacy over the Internet. The protocol allows client/server applications to communicate in a way designed to prevent eavesdropping, tampering, or message forgery. It is based on the SSL 3.0 Protocol Specification as published by Netscape. The differences between this protocol and SSL 3.0 are not dramatic, but they are significant enough that TLS 1.0 and SSL 3.0 do not interoperate (although TLS 1.0 does incorporate a mechanism by which a TLS implementation can back down to SSL 3.0). TLS runs above the transport layer. TLS is expected to supersede SSL as a mandated standard within 2 years. Since Netscape is supporting TLS development, it is expected that there will be no further development of the SSL protocol by Netscape. The following standards are emerging:

- [IETF-RFC 2246](#), The Transport Layer Security (TLS) Protocol Version 1.0, January 1999. 
- [IETF-RFC 2487](#), SMTP Service Extension for Secure SMTP over TLS, January 1999. 

### **2.6.3.2.2 Application Platform Entity Security Standards**

For the application platform entity, security standards are emerging for software engineering, operating systems, and distributed-computing services.


#### **2.6.3.2.2.1 Software-Engineering Services Security**

For software-engineering services, security standards are emerging for Generic Security Service (GSS)-Application Program Interface (API) and POSIX areas.

##### **2.6.3.2.2.1.1 Generic Security Service-Application Program Interface Security**

The Generic Security Service-Application Program Interface (GSS-API), as defined in RFC-1508, September 1993 (IETF), provides security services to callers in a generic fashion, supportable with a range of underlying mechanisms and technologies and hence allowing source-level portability of applications to different environments. RFC-1508 defines GSS-API services and primitives at a level independent of an underlying mechanism and programming language environment. RFC-

2078, “GSS-API, Version 2.0,” J. Linn, January 1997, revises RFC-1508, making specific, incremental changes in response to implementation experience and liaison requests. The following standard is emerging:

- [IETF RFC 2078](#), Generic Security Service Application Program Interface, Version 2, January 1997. 


The IETF Draft, “Independent Data Unit Protection Generic Security Service Application Program Interface (IDUP-GSS-API),” C. Adams, 25 March 1997, <draft-ietf-cat-idup-gss-07.txt>, extends the GSS-API (RFC-1508) for non-session protocols and applications requiring protection of a generic data unit (such as a file or message) independent of the protection of any other data unit and independent of any concurrent contact with designated “receivers” of the data unit. An example application is secure electronic mail in which data needs to be protected without any online connection with the intended recipient(s) of that data. Subsequent to being protected, the data unit can be transferred to the recipient(s)—or to an archive—perhaps to be processed as unprotected days or years later. The following standard is emerging:

- [Independent Data Unit Protection Generic Security Service Application Program Interface \(IDUP-GSS-API\), <draft-ietf-cat-idup-gss-07.txt>](#), 25 March 1997.

#### **2.6.3.2.2.2 Operating-System Services Security**

Operating-system services security standards are emerging in the following areas: evaluation criteria and authentication.

##### **2.6.3.2.2.2.1 Evaluation-Criteria Security Standards**

See [Section 2.6.3.2.1.1](#) for a description of the emerging Common Criteria. It is expected that the evolving Common Criteria Protection Profiles will replace those references to the Orange Book (e.g., Orange Book Class C2 would equate to a specific Common Criteria Protection Profile). More information on Common Criteria Protection Profiles is available on NIST’s Web home page at <<http://csrc.nist.gov/nistpubs/cc>>. 

##### **2.6.3.2.2.2.2 Authentication Security Standards**

IETF-RFC-2289, “A One-Time Password System,” February 1998, provides authentication for system access (login)—and other applications requiring authentication—that is secure against passive attacks based on replaying captured reusable passwords. The One-Time Password System evolved from the S/KEY One-Time Password System released by Bellcore. The following standard is emerging:

- [IETF RFC-2289](#), A One-Time Password System, February 1998. 


When Remote Dial-In Authentication is required, the following standard is emerging:

- [IETF RFC 2138](#), “Remote Authentication Dial In User Service (RADIUS),” April 1997. 

##### **2.6.3.2.2.3 Distributed-Computing Services Security Standards**

DCE Authentication and Security Specification C311, August 1997, is a draft Open-Group Specification for DCE.

The Common Object Request Broker Architecture (CORBA) Security Services define a software infrastructure that supports access control, authorization, authentication, auditing, delegation, non-repudiation, and security administration for distributed-object-based systems. This infrastructure can be based on existing security environments and can be used with existing permission mechanisms and login facilities. The key security functionality is confined to a trusted core that enforces the essential security policy elements. Since the CORBA Security Services are intended to be flexible, two levels of conformance may be provided. Level 1 provides support for a default system security policy covering access control and auditing. Level 1 is intended to support applications that do not have a default policy. Level 2 provides the capability for applications to control the security provided at object invocation and also for applications to control the administration of an application-specific security policy. Level 2 is intended to support multiple security policies and to provide the capability to select separate access control and audit policies. The following standards are emerging:

- [C311](#), DCE Authentication and Security Specification, August 1997. 
- [OMG document formal/98-12-10](#), CORBA Security Service 1.2, December 1998.

### **2.6.3.3 Information-Transfer Security Standards**

Security standards are emerging for the following information-transfer areas: end-systems (host standards) and network (internetworking standards).

#### **2.6.3.3.1 End-System Security Standards**

Emerging end-system security standards include host standards discussed in the following subsection.

##### **2.6.3.3.1.1 Host Security Standards**



Emerging security standards for host end-systems in security protocols are discussed in the following subsection.

###### **2.6.3.3.1.1.1 Security Protocols**

In mid-1996, some significant improvements were proposed to the Secure/Multipurpose Internet Mail Extensions (S/MIME) messaging security protocol and the underlying encapsulation protocol, PKCS#7. With these improvements, S/MIME will provide a business-quality security protocol for both the Internet and X.400 messaging environments. The improvements include: (1) algorithm independence, (2) support for digitally signed receipts, (3) support for mail lists, and (4) support for sensitivity labels in signed and unsigned/encrypted messages. This effectively merges S/MIME and Message Security Protocol (MSP) 4.0/ACP-120. In November 1997, the IETF formed the S/MIME security protocol working group to create Internet standards based on S/MIME and these improvements.

It is expected that the Trusted Systems Interoperability Group (TSIG), Trusted Information for Exchange for Restricted Environments (TSIX (RE) 1.1) will adopt MIL-STD-2045-48501 as a replacement for its Common Internet Protocol Security Options (CIPSO) labeling standard.

The following are emerging standards for Local Area Network (LAN) security and Metropolitan Area Networks (MANs) security:

- [IEEE 802.10](#), Standards for Local and Metropolitan Networks: Interoperable LAN/MAN Security (SILS) 1998. This IEEE standard provides specification for an interoperable data link layer security protocol and associated security services. It discusses services, protocols, data formats, and interfaces to allow IEEE products confidentiality. A security label option is specified that enables rule-based access control to be implemented using the Security Data Exchange (SDE) protocol. 
- [IEEE 802.10c-1998](#), Interoperable LAN/MAN Security (SILS) Key Management (Clause 3). Key management on IEEE 802 Local Area Networks (LANs) and Metropolitan Area Networks (MANs) is described and published separately as IEEE 802.10c-1998. This is a supplement to IEEE 802.10-1992 and is still recognized as valid in the 1998 version of 802.10-1998. Clause 3 specifies a cryptographic key management model and Key Management Protocol (KMP). 

### **2.6.3.3.1.1.2 Medium-Assurance Public-Key Infrastructure Security Standards**

#### **2.6.3.3.1.1.2.1 Background**

A public-key infrastructure (PKI) comprises the people, policies, procedures, and computing/telecommunications resources needed to manage public keys used by information systems. A PKI supports the following security services: authentication, data integrity, non-repudiation, confidentiality, and (optionally) authorization.

A PKI supports “X.509 public-key certificates,” as defined in International Telecommunications Union - Telecommunications (ITU-T) Recommendation X.509. A public-key certificate is a data structure that binds a subject (people, applications programs, machines, etc.) and the subject’s public key. A public-key certificate may contain additional attributes of the subject, such as address, phone number, and authorization (access control) data.

A PKI may support X.509 attribute certificates. An attribute certificate binds a subject and the subject’s authorization data, such as group membership, roles, clearances, privileges, and restrictions. The authorization data does not guarantee access to information resources, as the decision to grant or deny access is made by the application that uses the certificate. Attribute certificates do not contain public keys.

A private key is used to digitally sign data, such as messages, files, and transactions. The corresponding public key is used to verify the signature. A private key can also be used to decrypt data encrypted with the corresponding public key. In the DOD medium-assurance PKI, the public/private-key pairs used for non-repudiation or digital signature services will be distinct from the pairs used for encryption/decryption services. Public/private-key pairs are also used in algorithms that automatically distribute symmetric, secret keys.

X.509 public-key certificates are signed and issued by a special user called a certification authority (CA). A CA may also revoke certificates. X.509 attribute certificates are signed, issued, and revoked by an attribute certificate issuer.

The DoD medium-assurance PKI is authorized to protect unclassified and certain types of sensitive but unclassified (SBU) information, in accordance with the DoD Class 3 level of information assurance. The DoD medium-assurance PKI may also be used for digital signature services, user



authentication, and community of interest separation within certain types of classified networks protected by Type I cryptography. The U.S. DoD X.509 Certificate Policy specifies the permitted uses of a medium-assurance (Class 3) PKI in encrypted and unencrypted networks.

The standards listed below are the ones actually being used in the DoD medium-assurance pilot PKI. The standards are grouped according to the categories defined in the Internet Draft entitled “Internet X.509 Public Key Infrastructure PKIX Roadmap,” <draft-ietf-pkix-roadmap-02.txt>, 23 June 1999, plus additional categories not mentioned in the Roadmap. Additional information on PKI policy can be found at <<http://www-pki.itsi.disa.mil>>.

#### **2.6.3.3.1.1.2.2 Certificate Profiles**

The DoD medium-assurance certificate profile implements the Federal PKI certificate profile, which in turn implements the Internet Engineering Task Force (IETF) profile, which in turn implements the ITU-T X.509 profile. Emerging certificate profile standards is:

- [International Telecommunications Union - Telecommunications \(ITU-T\) Recommendation X.509](#), “Information Technology - Open Systems Interconnection - The Directory: Authentication Framework,” June 1997 as profiled by RFC 2459, “Internet X.509 Public Key Infrastructure Certificate and CRL Profile,” January 1999, IETF Proposed Standard, Federal Public Key Infrastructure Technical Working Group (FPKITWG) document TWG-98-07, “Federal PKI X.509 Certificate and CRL Extensions Profile,” 9 March 1998; and DOD Certificate Profile, as defined in MITRE Technical Report 98W, “Department of Defense (DOD) Medium Assurance Public Key Infrastructure (PKI) Functional Specification (Draft),” Version 0.3, 20 October 1998, Appendices A-D.

When DoD develops its Class 3 PKI interface specification, the DoD certificate profile will be included in it. MITRE Technical Report 98W is the only existing document that defines the DoD certificate profile.

#### **2.6.3.3.1.1.2.3 Operational Protocols and Exchange Formats**

Operational protocols deliver certificates and certificate revocation lists (CRLs) to certificate-using systems. The medium-assurance pilot uses RFC 2559, a profile of RFC 1777, Lightweight Directory Access Protocol, version 2, (LDAPv2), as its operational protocol. The following operational protocol is emerging:

- [IETF RFC 2559](#), “Internet X.509 Public Key Infrastructure Operational Protocols: LDAPv2,” April 1999, IETF Proposed Standard.

Certificates and CRLs are stored in LDAP servers, which are accessed by certificate-using systems through LDAPv2. RFC 2587 specifies the minimal schema required to support certificates and CRLs in an LDAP server. An emerging standard for LDAP PKI servers is:



- [IETF RFC 2587](#), “Internet X.509 Public Key Infrastructure LDAPv2 Schema,” June 1999, IETF Proposed Standard.

Certificates, private keys, and other personal data must be protected when they are moved between computers or removable media, such as smart cards or floppy disks. For secure or authenticated exchange of such personal data, the following standard is emerging:

- [RSA Laboratories Public Key Cryptography Standard #12](#), “Personal Information Exchange Syntax Standard,” version 1.0 (Draft), 30 April 1997.

#### 2.6.3.3.1.1.2.4 Management Protocols

Management protocols support transactions involving management entities, such as CAs, Registration Authorities (RAs), and Local Registration Authorities (LRAs). Typical transactions are user registration, certificate enrollment, and certificate revocation. The following management protocols are emerging:

- [IETF RFC 2315](#), Public Key Cryptography Standard (PKCS) #7, Cryptographic Message Syntax, Version 1.5, March 1998, Informational RFC. 
- [IETF RFC 2314](#), PKCS #10, Certification Request Syntax, Version 1.5, March 1998, Informational RFC. 

Although RFC 2315 and 2314 are based upon de facto standards from RSA Laboratories, Inc., the IETF is incorporating them into open, consensus-based standards, such as the Internet draft for “Certificate Management Messages over Cryptographic Message Syntax (CMC).” As the CMC draft matures, it will be considered for adoption as an emerging standard.


#### 2.6.3.3.1.1.2.5 Application Program Interfaces (APIs)

API standards allow programmers to incorporate PKI services into their applications in a manner that supports applications portability. The following standard is emerging:


- [RSA Laboratories Public Key Cryptography Standard \(PKCS\) #11](#), “Cryptographic Token Interface Standard,” version 1.0, 28 April 1995.

#### 2.6.3.3.1.1.2.6 Cryptography

The following standards are emerging:

- [RSA Laboratories Public Key Cryptography Standard \(PKCS\) #1](#), “RSA Cryptography Standard,” Version 2.0, 1 October 1998.
- [FIPS PUB 140-1](#), “Security Requirements for Cryptographic Modules,” 11 January 1994. {DOD X.509 Certificate Policy specifies the FIPS 140-1 security levels required for PKI users, RAs, and CAs}. 
- [Draft FIPS PUB 46-3](#), “Data Encryption Standard,” 8 January 1999. (This replaces DES with Triple DES, as specified in ANSI X9.52)

The following standard is emerging for PKI Class 3 implementations:

- [FIPS PUB 180-1](#), “Secure Hash Algorithm,” April 1995. 

### 2.6.3.3.2 Network Security Standards

Emerging network standards are listed in Section 2.6.3.3.2.1.



### 2.6.3.3.2.1 Internetworking Security Standards

IETF RFC 2401, “Security Architecture for the Internet Protocol,” S. Kent and R. Atkinson, November 1998, describes the security mechanisms for IP and the services that they provide. Each security mechanism is specified in a separate document. RFC-2401 also describes key management requirements for systems implementing those security mechanisms. It is not an overall Security Architecture for the Internet, but focuses on IP-layer security.

This RFC specifies the base architecture for IPsec-compliant systems. It also describes the security services offered by the IPsec protocols and how these services can be employed in the IP environment. IPsec is designed to provide interoperable, high-quality, cryptographically based security for IPv4 and IPv6. The set of security services offered includes access control, connectionless integrity, data origin authentication, protection against replays (a form of partial sequence integrity), confidentiality (encryption), and limited traffic flow confidentiality. These services are provided at the IP layer, offering protection for IP and/or upper-layer protocols. These objectives are met through the use of two traffic security protocols, the Authentication Header (AH) and the Encapsulating Security Payload (ESP), and through the use of cryptographic key management procedures and protocols.

The Internet Draft RFC 2402, “IP Authentication Header,” S. Kent and R. Atkinson, November 1998, describes a mechanism for providing integrity and authentication for IP datagrams. An AH is normally inserted after an IP header and before the other information being authenticated. The AH is a mechanism for providing strong integrity and authentication for IP datagrams. It might also provide non-repudiation, depending on which cryptographic algorithm is used and how keying is performed.

IETF RFC 2402 “IP Authentication Header,” November 1998. The IP Authentication Header (AH) is used to provide connectionless integrity and data origin authentication for IP datagrams, and to provide protection against replays. AH may be applied alone, in combination with the IP Encapsulating Security Payload (ESP), or in a nested fashion through the use of tunnel mode. Security services can be provided between a pair of communicating hosts, between a pair of communicating security gateways, or between a security gateway and a host. ESP may be used to provide the same security services, and it also provides a confidentiality (encryption) service. The primary difference between the authentication provided by ESP and AH is the extent of the coverage. Specifically, ESP does not protect any IP header fields.

IETF RFC 2406, “IP Encapsulating Security Payload (ESP),” S. Kent and R. Atkinson, November 1998, discusses a mechanism for providing integrity and confidentiality to IP datagrams. In some circumstances, depending on the encryption algorithm and mode used, it can also provide authentication to IP datagrams. Otherwise, the IP AH may be used in conjunction with ESP to provide authentication. The mechanism works with both IPv4 and IPv6.

IETF RFC 2406 “IP Encapsulating Security Payload (ESP),” November 1998. The ESP header is designed to provide a mix of security services in IPv4 and IPv6. ESP may be applied alone, in combination with the IP AH [KA97b], or in a nested fashion, e.g., through the use of tunnel mode. Security services can be provided between a pair of communicating hosts, between a pair of communicating security gateways, or between a security gateway and a host. ESP is used to

provide confidentiality, data origin authentication, connectionless integrity, an anti-replay service, and limited traffic flow confidentiality. However, use of confidentiality without integrity/authentication (either in ESP or separately in AH) may subject traffic to certain forms of active attacks that could undermine the confidentiality service.

IETF RFC 2104, “HMAC: Keyed-Hashing for Message Authentication,” February 1997, H. Krawczyk (IBM), M. Bellare (UCSD), R. Canetti (IBM). This document describes HMAC, a mechanism for message authentication using cryptographic hash functions. HMAC can be used with any iterative cryptographic hash function, e.g., MD5, SHA-1, in combination with a secret shared key. The cryptographic strength of HMAC depends on the properties of the underlying hash function.

IETF RFC 1829, “The ESP DES-CBC Transform,” P. Karn (Qualcomm), P. Metzger (Piermont), W. Simpson (Daydreamer), August 1995. The Encapsulating Security Payload (ESP) provides confidentiality for IP datagrams by encrypting the payload data to be protected. This specification describes the ESP use of the Cipher Block Chaining (CBC) mode of the U.S. Data Encryption Standard (DES) algorithm (FIPS PUB 46, FIPS PUB 46-1, FIPS PUB 74, FIPS PUB 81). All implementations that claim conformance or compliance with the ESP specification must implement this DES-CBC transform. RFC 2451, “The ESP CBC-Mode Cipher Algorithms,” R. Periera and R. Adams, November 1998 and RFC 2405, “The ESP CBC-Mode Cipher Algorithm with Explicit IV,” C. Madson and N. Doraswamy, November 1998, are examples of encryption algorithms used for ESP.













Draft FIPS 46-3 Data Encryption Standard (DES). For those systems required or desiring to use a cryptographic device to protect privacy act information and other unclassified, non-Warner Act exempt information, the Data Encryption Standard (DES) may apply. The DES is found in draft FIPS 46-3 Data Encryption Standard. IETF RFC 2420. The PPP Triple-DES Encryption Protocol (3DESE) is a complement to FIPS 46-3.

The Domain Name System (DNS) has become a critical operational part of the Internet infrastructure, yet it has no strong security mechanisms to ensure data integrity or authentication. IETF RFC-2065, “DNS Security Extensions,” D. Eastlake, C. Kaufman, January 1997, describes extensions to the DNS that provide these services to security-aware resolvers or applications through the use of cryptographic digital signatures. These digital signatures are included in secured zones as resource records. Security can still be provided even through non-security-aware DNS servers in many cases. The extensions also provide for the storage of authenticated public-keys in the DNS. This storage of keys can support general public key distribution service as well as DNS security.


IETF RFC 2408, “Internet Security Association and Key Management Protocol (ISAKMP),” Douglas Maughan, Mark Schertler, Mark Schneider, Jeff Turner, 21 February 1998, describes a protocol utilizing security concepts necessary for establishing Security Associations (SAs) and cryptographic keys in an Internet environment. It is expected that the IETF will adopt this protocol as the Internet standard for key and security association management for IPv6 security.

The IETF Draft, “The Resolution of ISAKMP with Oakley,” D. Harkins, D. Carrel (Cisco Systems), February 1997, describes a proposal for using the Oakley Key Exchange Protocol in conjunction with ISAKMP to obtain authenticated keying material for use with ISAKMP, and for other security associations such as AH and ESP for the IETF IPsec Domain of Interpretation (DOI). ISAKMP provides a framework for authentication and key exchange but does not define them. ISAKMP is designed to be key-exchange-independent; that is, it is designed to support many different key exchanges. Oakley describes a series of key exchanges—called “modes”—and details the services provided by each (e.g., perfect forward secrecy for keys, identity protection, and authentication).


RFC 2407, “The Internet IP Security Domain of Interpretation for ISAKMP,” D. Piper, November 1998, details the Internet IP Security DOI, which is defined to cover the IP security protocols that use ISAKMP to negotiate their security associations. The ISAKMP defines a framework for security association management and cryptographic key establishment for the Internet. This framework consists of defined exchanges and processing guidelines that occur within a given DOI. The following standards are emerging:

- [IETF RFC 2401](#), Security Architecture for the Internet Protocol, November 1998. 
- [IETF RFC 2402](#), IP Authentication Header, November 1998. 
- [IETF RFC 2406](#), IP Encapsulating Security Payload (ESP), November 1998. 
- [IETF RFC 2104](#), HMAC: Keyed-Hashing for Message Authentication, February 1997. 
- [IETF RFC 1829](#), The ESP DES-CBC Transform, August 1995. 
- [IETF RFC 2451](#), The ESP CBC-Mode Cipher Algorithms, November 1998. 
- [IETF RFC 2405](#), The ESP CBC-Mode Cipher Algorithm with Explicit IV, November 1998. 
- [Draft FIPS 46-3](#), Data Encryption Standard (DES). 
- [IETF RFC 2420](#), The PPP Triple-DES Encryption Protocol (3DESE) as a complement to FIPS 46-3. 
- [IETF RFC 2065](#), DNS Security Extensions, January 1997. 
- [IETF RFC 2408](#), Internet Security Association and Key Management Protocol (ISAKMP), 21 February 1998. 
- [IETF RFC 2407](#), Internet Draft, The Internet IP Security Domain of Interpretation for ISAKMP, November 1998. 

Two IEEE LAN security standards are emerging:

- [IEEE 802.10](#), IEEE Standards for Local and Metropolitan Area Networks (MANs): Interoperable LAN/MAN Security (SILS), 1998, discusses services, protocols, data formats, and interfaces to allow IEEE 802 products to interoperate, and discusses authentication, access control, data integrity, and confidentiality. 
- [IEEE 802.10a](#), Standard for Interoperable LAN Security – The Model, Draft January 1989, shows the relationship of SILS to OSI and describes required interfaces.

RFC-2228, File Transfer Protocol, October 1997, defines extensions to the FTP standard (STD9/ RFC 959). These extensions provide strong authentication, integrity, and confidentiality on both the control and data channels. RFC-2228 also introduces new optional commands, replies, and file transfer encodings. The following standard is emerging:

- [IETF RFC 2228](#), File Transfer Protocol, October 1997. 

#### **2.6.3.4 Information-Modeling, Metadata, and Information-Exchange Security Standards**

There are no emerging standards in this area at this time.

#### **2.6.3.5 Human-Computer Interface Security Standards**

Refer to [Section 2.6.3.2.1.1](#) for information pertaining to the Common Criteria Protection Profiles emerging standard that is expected to replace DoD 5200.28-STD.

Refer to [Section 2.6.3.3.1.1.2](#) for information pertaining to FIPS PUB 196, Entity Authentication Using Public Key Cryptography, 18 February 1997.

# **Command, Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance (C4ISR) Domain Annex**

## **C4ISR.1 Domain Overview**

### **C4ISR.1.1 Purpose**

The C4ISR Domain Annex identifies elements (i.e., standards, interfaces, and service areas) specific to the functional areas of command, control, communications, computers, intelligence, surveillance, and reconnaissance that are additions to those standards listed in Section 2 of the JTA Core. These additions are common to the majority of C4ISR systems and support the functional requirements of C4ISR systems.

### **C4ISR.1.2 Background**


The scope and elements listed in JTA Version 1.0 focused on C4I. Version 2.0 expanded the scope to include the areas of C4ISR, Modeling and Simulation, Weapon Systems, and Combat Support. The sections describing these areas are referred to as domain annexes.

### **C4ISR.1.3 Domain Description**

The C4ISR domain consists of those integrated systems of doctrine, procedures, organizational structures, personnel, equipment, facilities, and communications whose primary focus is on one or more of the following functions:

- ☐ Support properly designated commanders in the exercise of authority and direction over assigned and attached forces across the range of military operations.
- ☐ Collect, process, integrate, analyze, evaluate, or interpret available information concerning foreign countries or areas.
- ☐ Systematically observe aerospace, surface or subsurface areas, places, persons, or things by visual, aural, electronic, photographic, or other means.
- ☐ Obtain, by visual observation or other detection methods, information about the activities and resources of an enemy or potential enemy, or secure data concerning the meteorological, hydrographic, or geographic characteristics of a particular area.

This annex will specifically address the information technology (IT) aspect of the C4ISR domain. It should be noted that this does not include those systems or other IT components specifically identified as belonging to the Combat Support domain or whose primary function is the support of day-to-day administrative or support operations at fixed-base locations. Examples of such systems include acquisition, finance, human resources, legal, logistics, and medical systems, and items such as general-purpose LANs, computer hardware and software, telephone switches, transmission equipment, and outside cable plant. The position of the C4ISR domain in the Notional JTA Hierarchy is shown in [Figure C4ISR-1](#).

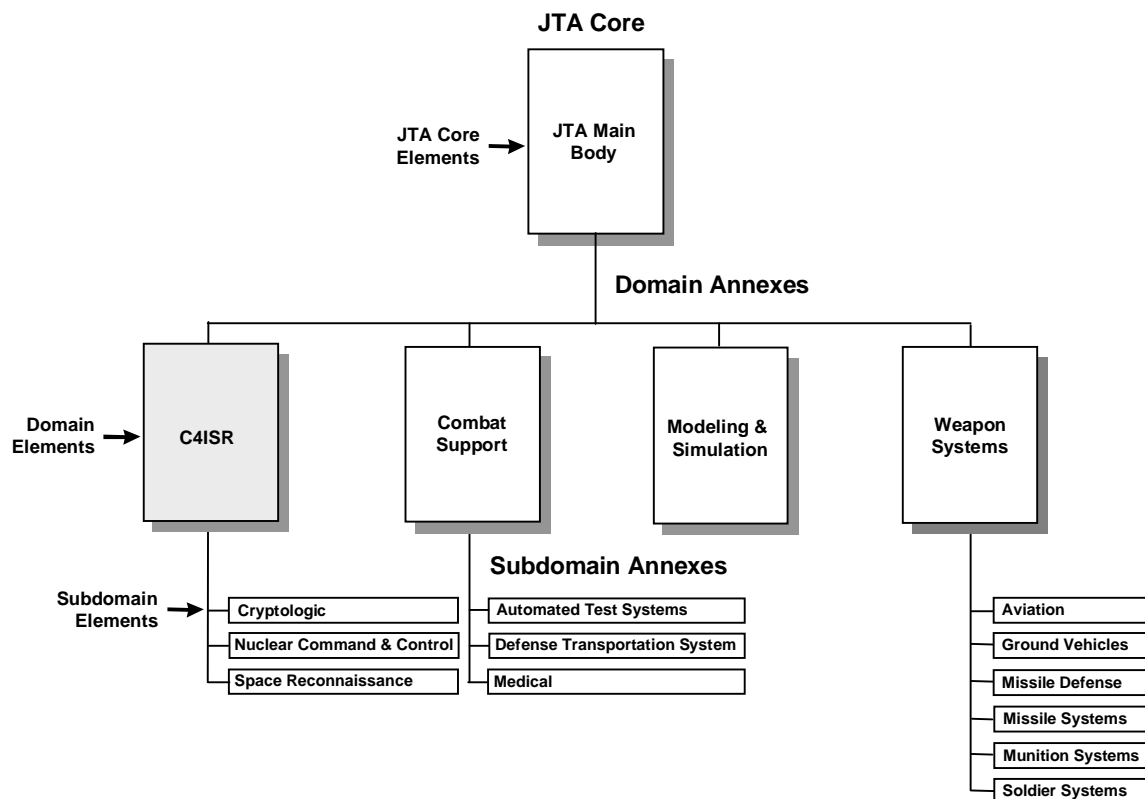

**Figure C4ISR-1: Notional JTA Hierarchy**

#### **C4ISR.1.4 Scope And Applicability**

The elements listed in this domain are mandated for use on all emerging systems or upgrades to existing systems developed to meet the functional area of C4ISR. Users of this document are encouraged to review other domain annexes to better gauge which domain is applicable.

#### **C4ISR.1.5 Technical Reference Model**

This domain uses the DoD Technical Reference Model cited in [Section 2.1.2.1](#) of the JTA as its framework. Additional service areas required to support the C4ISR domain are addressed in [Section C4ISR.3](#), Domain-Specific Service Areas.

#### **C4ISR.1.6 Domain Organization**

The C4ISR domain consists of three sections. Section C4ISR.1 contains the overview, C4ISR.2 contains Information Technology standards that are additions to those contained in the JTA Core, and C4ISR.3 is reserved for those elements that are domain-specific because they do not map directly to the JTA Core service areas.

## **C4ISR.2 Additions to the JTA Core**

### **C4ISR.2.1 Introduction**

The following sections map to the service areas of the main body of the JTA. They identify standards, profiles, and practices that are applicable to the C4ISR domain, but have not yet been selected for inclusion in the JTA Core.

### **C4ISR.2.2 Information-Processing Standards**

#### **C4ISR.2.2.1 Introduction**

The information-processing standards and profiles described in this section promote seamless interoperability for C4ISR systems through the use of standardized interfaces for application platforms and software.


#### **C4ISR.2.2.2 Mandated Standards**

The following sections identify the mandatory standards, profiles, and practices for information processing that shall be used in the development and acquisition of C4ISR systems. These are in addition to those listed in the core, which are mandated for all systems that utilize information technology.

##### **C4ISR.2.2.2.1 Still-Imagery Data Interchange**


The National Imagery Transmission Format Standard (NITFS) allows for Support Data Extensions (SDEs), which are a collection of data fields that provide space within the NITF file structure for adding functionality. Documented and controlled separately from the core NITFS suite of standards, SDEs extend NITF functionality with minimal impact on the underlying standard document. SDEs may be incorporated into an NITF file while maintaining backward compatibility because the identifier and byte count mechanisms allow applications developed prior to the addition of newly defined data to skip over extension fields they are not designed to interpret.

Imagery Chip, Version B (ICHIPB) is a system-independent NITF SDE that, when included with NITF image chips, will support mensuration of non-dewarped imagery. This NITF SDE holds the support data analysts need when using imagery software to mensurate or determine detailed geospatial parameters on pixel-based features within image chips. There is no mechanism in the standard NITF format to pass a standardized set of data with an image chip such that a user can easily apply imagery software to that image. The following standard is mandated for NITF systems that use National Technical Means (NTM), Tactical/Airborne imagery, or Commercial Satellite imagery:


- [STDI0002](#), [ICHIPB](#) Support Data Extension for the National Imagery Transmission Format, Version 1.0, 16 November 1998; as documented in Section 5 of The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999. 

The Profile for Imagery Access Extensions (PIAE) SDE is designed to provide an area to place fields not available in the NITF but which were documented in the canceled Standards Profile for Imagery Access (SPIA). The PIAE was developed to align the SPIA and NITF for product infor-


mation and adds descriptive detail associated with products. The following standard is mandated for NITF systems that use imagery from National Technical Means (NTM), Tactical/Airborne imagery, or Commercial Satellite imagery:

- [STDI0002](#), National Imagery Transmission Format Profile for Image Access Extensions (PIAE), Version 3.0, 25 September 1997; as documented in Section 6 of The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999. 

The Airborne SDE supersedes the VIMAS SDE and SAR SDEs described in version 1.0 of the NITFS Compendium of Controlled Extensions. The Airborne SDE incorporates all NITF tagged records relevant to SAR, Electro-Optical, Multispectral, and Hyperspectral primary imagery. Systems that use NITF imagery from airborne sensors shall be designed to extract data from the records described in this SDE. The following standard is mandated for NITF systems that exploit Tactical/Airborne imagery:

- [STDI0002](#), Airborne Support Data Extension (ASDE), Version 1.0, 13 January 1999; as documented in Section 8 of The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999. 

The History Tag, Version A (HISTOA) Softcopy History Tag, provides a history of any softcopy-processing actions applied to an NITF image. These extensions describe the format for support information within an NITF file containing National System Imagery. The following standard is mandated for NITF systems that exploit NTM:

- [STDI0002](#), HISTOA Extension, 25 August 1998; as documented in Section 15 of The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999. 

### **C4ISR.2.2.3 Emerging Standards**

There are currently no emerging standards identified in this section of the C4ISR domain.

## **C4ISR.2.3 Information-Transfer Standards**

### **C4ISR.2.3.1 Introduction**

The information-transfer standards and profiles described in this section promote seamless communications and information-transfer interoperability for C4ISR systems through the use of standardized interfaces for end-systems, networks, transmission media, and systems management.

### **C4ISR.2.3.2 Mandated Standards**

The following sections identify the mandatory standards, profiles, and practices for information transfer that shall be used in the development and acquisition of C4ISR systems. These are in addition to those listed in the core, which are mandated for all systems that utilize information technology.

#### **C4ISR.2.3.2.1 Transmission Media**

Transmission media refers to the physical paths used to transfer information among Components within the same system or among different systems.



#### **C4ISR.2.3.2.1.1 Radio Communications**

This section addresses standards that facilitate the interoperability of C4ISR systems that utilize the portion of the electromagnetic spectrum below 300 GHz for wireless communication.

##### **C4ISR.2.3.2.1.1.1 Common Data Link Standards**

The Common Data Link (CDL) is a flexible, multipurpose radio link-based digital communication technology developed by the Government for use in imagery and signals intelligence collection systems. It provides standard waveforms that follow a line-of-sight microwave path (link) and allows both full-duplex and simplex communications between airborne/space-based platforms and surface-based terminals. The CDL system supports air-to-land/sea surface, and air-to-satellite (relay/beyond line-of-sight) communications modes.

The term CDL refers to a family of interoperable data link implementations that offer alternate levels of capabilities for different applications/platforms. Five classes (Class I through Class V) of CDL have been defined. The Class I CDL standard addresses land/sea surface terminals that provide remote operation of airborne platforms operating up to 80,000 feet at mach 2.3 or less. The current land-based implementation of Class I CDL is the Miniature Interoperable Surface Terminal (MIST). The current sea-based implementation of Class I CDL is the Common High Bandwidth Data Link Surface Terminal (CHBDL-ST). Classes II through V cover the remainder of the defined CDL systems and are based on maximum altitude ceilings and sometimes platform mach number: Class II to 150,000 feet at mach 5 or less; Class III to 500,000 feet; Class IV to 750 nautical miles and is part of a satellite; lastly Class V that operates above 750 nautical miles and is part of a relay satellite. The majority of DoD CDL interoperability and standardization efforts have been focused on the Class I line-of-sight CDL system specification.

The Office of the Assistant Secretary of Defense for C3I (OASD/C3I) designated CDL as the DoD standard in a policy memorandum (OASD/C3I Common Data Link Policy Memorandum, 13 December 1991). A similar policy memorandum was released to mandate the use of the Tactical CDL (OASD/C3I Tactical Data Link Policy Memorandum, 18 October 1994). The following mandated standards apply for unified configuration control and standardized communications paths between airborne reconnaissance platforms that contain multiple sensors:

- [System Specification for the CDL Segment](#), Specification 7681990, Revision D, 29 January 1997.
- [System Description Document for CDL](#), Specification 7681996, 5 May 1993.

##### **C4ISR.2.3.2.1.1.2 Unattended MASINT Sensor Communication Standards**

Unattended Measurement and Signature Intelligence (MASINT) Sensors (UMS) are small, autonomously powered, disposable systems that can be deployed by airborne platforms or ground personnel. UMS can contain one or more types of sensors (seismic, acoustic, IR, magnetic, chemical, or radiological) that transmit alarm messages or data when triggered by enemy activity. The SEI-WG-005 standard specifies the frequencies, data formats, and protocols for this class of sensors in order to relay the data back via communication links and data relays, to a common exploitation station. The following standard is mandated for use in UMS systems:

- [Interface Specification](#), Radio Frequency Transmission Interfaces for DoD Physical Security Systems, SEIWG-005, 15 December 1981.

### **C4ISR.2.3.3 Emerging Standards**

The Program Management Office for Night Vision/Reconnaissance and Target Acquisition (PM NV/RSTA) has developed the Sensor Link Protocol (SLP) for use as a common local network interface between RSTA sensor systems and a host computer system. It is anticipated that SLP will evolve to provide a stable sensor interface baseline within the Intelligence and Electronic Warfare (I/EW) community. The following standard is emerging:

- [ICD-SLP-200](#), September 14, 1998. Interface Control Document (ICD) Title: Sensor Link Protocol.

## **C4ISR.2.4 Information-Modeling, Metadata and Information-Exchange Standards**

### **C4ISR.2.4.1 Introduction**

The information-modeling, metadata, and information-exchange standards and profiles described in this section facilitate interoperability between C4ISR systems through the use of standardized activity models, data models, data definitions, and formatted messages.

### **C4ISR.2.4.2 Mandated Standards**

The following sections identify the mandatory standards, profiles, and practices for information modeling, metadata, and information exchange that shall be used in the development and acquisition of C4ISR systems. These are in addition to those listed in the core, which are mandated for all systems that utilize information technology.

#### **C4ISR.2.4.2.1 Information-Exchange Standards**

Information-Exchange refers to the exchange of information among mission-area applications within the same system or among different systems.

##### **C4ISR.2.4.2.1.1 Target/Threat Data Interchange Standards**

The National Target/Threat Signature Data System (NTSDS) has been designated as a migration system, in accordance with guidance from ASD (C3I) and by the Intelligence Systems Board (ISB). NTSDS provides the DoD signature data community (e.g., ISR and MASINT) signature data from multiple, geographically distributed sites via a unified national system. NTSDS Data Centers employ standard data parameters and formats for stored target signatures for national and DoD customers. The following data standards are mandated for the DoD signature data community when interchanging national target/threat data:

- [NTSDS Database Implementation Description & Core Schema Definition](#), Version 1.2a, 19 September 1997.
- [NTSDS Supplemental Schema Definition](#), Version 1.1, 24 September 1997.

### **C4ISR.2.4.3 Emerging Standards**

There are currently no emerging standards identified for this service area of the C4ISR domain.

## **C4ISR.2.5 Human-Computer Interface Standards**

### **C4ISR.2.5.1 Introduction**

The human-computer interface standards and profiles described in this section facilitate interoperability between C4ISR systems through the use of standardized user interfaces, style guides, and symbology.

### **C4ISR.2.5.2 Mandated Standards**

There are currently no mandated standards identified in this service area of the C4ISR domain.

### **C4ISR.2.5.3 Emerging Standards**

There are currently no emerging standards identified in this service area of the C4ISR domain.

## **C4ISR.2.6 Information-Security Standards**

### **C4ISR.2.6.1 Introduction**

The information-security standards and profiles described in this section facilitate interoperability between C4ISR systems through the use of standardized security interfaces for systems that process, transport, model, or exchange information.

### **C4ISR.2.6.2 Mandated Standards**

There are currently no mandated standards identified in this service area of the C4ISR domain.

### **C4ISR.2.6.3 Emerging Standards**

There are currently no emerging standards identified in this service area of the C4ISR domain.

## **C4ISR.3 Domain-Specific Service Areas**

### **C4ISR.3.1 Introduction**

The following sections map to service areas that apply to the C4ISR domain, but not to the JTA Core. The standards, profiles, and practices identified are applicable only in the context of these service areas.

## **C4ISR.3.2 Payload-Platform Interface**

### **C4ISR.3.2.1 Introduction**

The interface standards identified in this section address interoperability requirements for the integration of a C4ISR payload (e.g., sensor package, communications relay) into a manned or unmanned aerospace platform. It is recognized that vehicle interface characteristics are often driven by the requirements of legacy technologies or other onboard systems. In these cases, the JTA rule set described in Section 1 of the JTA Core, and as interpreted by individual Service/Agency JTA Implementation Plans, should be used to determine mandate applicability.

### **C4ISR.3.2.2 Mandated Standards**

The following sections identify the mandatory standards, profiles, and practices for the integration of a C4ISR payload into a manned or unmanned aerospace platform. It should be noted that the standards in this section apply to the platform only to the extent to which they directly affect the interoperability of onboard C4ISR systems.

At the present time, these mandates apply only to airborne reconnaissance systems.

#### **C4ISR.3.2.2.1 Navigation, Geospatial**

Navigation service provides information about the position and attitude (roll, pitch and yaw) of the collection platform. Navigation and geospatial data are parts of the metadata associated with sensor data, and are critical to sensor data exploitation. The following navigation and geospatial standard is mandated for airborne reconnaissance systems:

- [SNU-84-1](#), Revision D Specification for USAF Standard Form, Fit, and Function (F3) Medium Accuracy Inertial Navigation Unit (INS), 21 September 1992.

#### **C4ISR.3.2.2.2 Internal Communications**

Internal communications provide information-transfer capabilities between the platform and the onboard C4ISR systems, subsystems, and components. This section identifies the standards necessary to facilitate interoperability within and between these entities.

##### **C4ISR.3.2.2.2.1 Fibre Channel**

Fibre Channel is an efficient, high-speed, serial data communication technology for use in many environments including near-real-time high-speed data transfer, and local/campus networking environments. The Fibre Channel Physical and Signaling standards pertain to first three layers of the Fibre Channel stack (FC0, FC1, and FC2). FC0 addresses the physical media, FC1 discusses the data-encoding scheme, and FC2 addresses the framing protocol and flow control. The media chosen for Fibre Channel can accommodate speeds of 133, 266, and 531 Mbps and 1.06, 2.12, and 4.25 Gbps. The following standard is mandated for network communications internal to airborne reconnaissance platforms where Fibre Channel is used:

- [ANSI X3.230-1994/AM 2-1996](#), Information Technology – Fibre Channel – Physical and Signaling Interface (FC-PH), with amendments, 24 May 1999.

##### **C4ISR.3.2.2.2.2 FireWire**

FireWire describes a serial bus that provides the same services as modern IEEE-standard parallel buses. It has a 64-bit address space, control registers, and a read/write/lock operations set that conforms to IEEE Std 1212-1991, Command and Status Register (CSR). The following standard is mandated for serial bus communications internal to airborne reconnaissance platforms where FireWire is used:

- [IEEE Std 1394-1995](#), IEEE Standard for a High Performance Serial Bus, December 1995.

#### **C4ISR.3.2.2.3 Vehicle/Sensor Telemetry**

Commands to various SIGINT, IMINT, and MASINT front-end equipment flow through airborne telemetry systems to onboard LANs. Sensor commands and acknowledgments may include position changes, mode changes, fault isolation commands, and others. The following telemetry standard is mandated for airborne reconnaissance systems:

- [Telemetry Group, Range Commanders Council, Telemetry Standards](#), IRIG 106-96, Secretariat, Range Commanders Council, U.S. Army White Sands Missile Range, New Mexico, Chapter 4, Pulse Coded Modulation Standards, Chapter 8 - MIL-STD-1553 Department of

Defense Interface Standard for Digital Time Division Command/Response Multiplex Data Bus,  
21 March 1996.

#### **C4ISR.3.2.2.4 Mission Recorder**

Mission recorders are used to capture the raw, pre-processed sensor data together with associated navigation, timing, and ancillary data. Additionally a computer-controlled interface for basic recorder functions such as start, stop, shuttle, fast-forward, and rewind is included.

In conjunction with recording the raw sensor data, timing data will be recorded (on a separate track) in accordance with the standards defined below. The DCRSi 240 rack mount and modular ruggedized systems are one inch, transverse scan, rotary digital recorders capable of recording and reproducing at any user data rate from 0 to 30 Mbytes/s (0-240 Mbps). The ANSI digital recording standard, providing data compatibility and tape interchangeability, is provided by the X3.175 series. The Instrumentation Group IRIG-B standard was written specifically for analog magnetic tape storage. In conjunction with the migration to all digital systems, mission-recorder standards will be re-evaluated to emphasize digital and de-emphasize analog.

To support digital recording activities, the following mission-recorder standards are mandated for use in airborne reconnaissance systems:

- [Compatibility with the published AMPLEX Digital Instrumentation Recorder DCRSi 240 User Manual.](#)
- [ANSI X3.175](#), 19-mm Type ID-1 Recorded Instrumentation – Digital Cassette Tape Form, 1990, ID 1.

To support analog recording activities, the following mission recorder standard is mandated for use in airborne reconnaissance systems:

- [Instrumentation Group \(IRIG\) B](#) format as defined in IRIG Serial Time Code Formats, IRIG 200-98, May 1998.

#### **C4ISR.3.2.3 Emerging Standards**

There are currently no emerging standards identified in this service area of the C4ISR domain.

Page intentionally left blank.

# **Cryptologic Subdomain Annex for the C4ISR Domain**

## **C4ISR.CRY.1 Subdomain Overview**

The Cryptologic Subdomain Annex supports the objectives that provide the framework for meeting the Cryptologic community's requirements.<sup>1</sup> First, the Cryptologic Subdomain Annex provides the foundation for interoperability and the seamless flow of information between and among all cryptologic systems and the associated service components in a collaborative and secure environment. Second, it establishes the minimum set of standards and technical guidelines for development and acquisition of new, upgraded, and demonstration systems necessary to achieve interoperability as well as reductions in costs and fielding times. Finally, it promotes interoperability with other components of the Intelligence Community (IC).

### **C4ISR.CRY.1.1 Purpose**

The Cryptologic Subdomain Annex mandates the minimum set of standards and guidelines for cryptologic systems and subsystems. This includes National and Tactical Cryptologic systems and subsystems. The annex provides the technical foundation for migrating United States Cryptologic System (USCS) systems toward a common Unified Cryptologic System architecture as directed by the Director, NSA (DIRNSA) and the Director, Central Intelligence (DCI).

### **C4ISR.CRY.1.2 Background**

Faced with the challenges of keeping pace with changing intelligence requirements, budgetary uncertainty, and technological revolutions, the Director, National Security Agency, under the auspices of the Deputy Secretary of Defense and the Director, Central Intelligence, commissioned the Unified Cryptologic Architecture (UCA) study. The primary goal of the UCA study was to provide an architecture that would ensure an interoperable and secure USCS by 2010. The result of this study was the introduction of the UCA Operational, Systems, and Technical Architectures. The UCA Technical Architecture (UCA-TA) is complementary to the JTA and will be used in conjunction with the JTA Core and the JTA C4ISR Domain Annex by all members of the Cryptologic community.

### **C4ISR.CRY.1.3 Subdomain Description**

The Cryptologic Subdomain Annex mandates standards for the Cryptologic community. The objective is to facilitate the exchange and exploitation of cryptologic data across the IC and the Department of Defense (DoD).

---

1. Cryptologic Community defines entities composed of the NSA, elements of the military departments and the CIA performing SIGINT activities, and elements of an other department or agency of the Federal Government that may, from time to time, be so authorized, and the Information Systems Security activities that protect these SIGINT activities. SIGINT is defined as intelligence information comprising, either individually or in combination, all communications intelligence, electronics intelligence, and foreign instrumentation signals intelligence, however transmitted.

**C4ISR.CRY.1.4 Scope**

The scope of this annex includes the service areas of the JTA Core and C4ISR domain, (Information-Processing, Information-Transfer, Information-Modeling, Metadata and Information-Exchange, Human-Computer Interface and Information-Security Standards). This annex also addresses additional areas unique to the Cryptologic community including Special-Purpose Devices, backplanes, and circuit cards.

**C4ISR.CRY.1.5 Applicability**

This subdomain applies to all National and Tactical cryptologic systems, subsystems, and demonstration systems. It applies to all new acquisitions and upgrades to existing systems and subsystems that perform SIGINT and/or SIGINT-related activities. A cryptologic system is defined as any system within DoD that collects, processes, and/or manages SIGINT.

**C4ISR.CRY.1.6 Subdomain Organization**

The subdomain annex is divided into three sections. Section 1 contains the overview. This section defines the purpose and scope of the annex and provides background information. Section 2 contains standards for the Cryptologic community that are in addition to the standards in the JTA Core and the C4ISR domain service areas. Section 3 contains services and interfaces unique to the Cryptologic community.

**C4ISR.CRY.2 Standards in Addition to the JTA Core and C4ISR Domain****C4ISR.CRY.2.1 Introduction**

This part of the Cryptologic Subdomain Annex establishes the minimum set of rules governing the information technology for cryptologic systems. The scope includes standards for information processing; information transfer; information modeling, metadata, and information exchange; information security; and human-computer interface.

**C4ISR.CRY.2.2 Information-Processing Standards****C4ISR.CRY.2.2.1 Introduction**

The information-processing standards and profiles described in this section promote seamless interoperability for cryptologic systems through the use of standardized interfaces for application platforms and software.

**C4ISR.CRY.2.2.2 Mandated Standards**

There are no additional mandated standards in this section.

**C4ISR.CRY.2.2.3 Emerging Standards**

There are no emerging standards in this section.

**C4ISR.CRY.2.3 Information-Transfer Standards****C4ISR.CRY.2.3.1 Introduction**

The information-transfer standards and profiles described in this section promote seamless communications and information-transfer interoperability for cryptologic systems through the use of standardized interfaces for end-systems, networks, transmission media, and systems management.



### **C4ISR.CRY.2.3.2 Mandated Standards**

In addition to the standards in the JTA Core and the C4ISR domain, Cryptologic systems shall comply with the following:

#### **C4ISR.CRY.2.3.2.1 Sub Networks**

##### **C4ISR.CRY.2.3.2.1.1 Fibre Channel**

Fibre Channel is a robust technology capable of real-time, deterministic operations required in many cryptologic systems. Note: Fibre Channel can be implemented over copper as well as fiber media.

Cryptologic systems using Fibre Channel shall comply with the following mandated standard:

- [ANSI X3.230-1994](#) (FC-PH) Fibre Channel Physical and Signaling Interface.

##### **C4ISR.CRY.2.3.2.1.2 Gigabit Ethernet**

Ethernet is the most widely used network technology. Gigabit Ethernet offers a high-speed migration option from existing Ethernet applications as well as a viable replacement option for FDDI.

Cryptologic systems using Gigabit Ethernet shall comply with the following:

- [IEEE 802.3z](#), 1998 Gigabit Ethernet.

### **C4ISR.CRY.2.3.3 Emerging Standards**

#### **C4ISR.CRY.2.3.4 Storage Area Networks**

Fibre Channel, especially in the Arbitrated Loop topology, is becoming the emerging standard for connecting multiple storage devices.

- [ANSI X3.230-1994](#) (FC-PH) Fibre Channel Physical and Signaling Interface.

### **C4ISR.CRY.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

#### **C4ISR.CRY.2.4.1 Introduction**

The information-modeling, metadata, and information-exchange standards and profiles described in this section facilitate interoperability between cryptologic systems through the use of standardized activity models, data models, data definitions, and formatted messages.

#### **C4ISR.CRY.2.4.2 Mandated Standards**

There are no additional mandated standards in this section.

#### **C4ISR.CRY.2.4.3 Emerging Standards**

There are no emerging standards in this section.

## **C4ISR.CRY.2.5 Human-Computer Interface Standards**

### **C4ISR.CRY.2.5.1 Introduction**

The human-computer interface standards and profiles described in this section facilitate interoperability between cryptologic systems through the use of standardized user interfaces, style guides, and symbology.

### **C4ISR.CRY.2.5.2 Mandated Standards**

There are no additional mandated standards in this section.

### **C4ISR.CRY.2.5.3 Emerging Standards**

There are no emerging standards in this section.

## **C4ISR.CRY.2.6 Information-Security Standards**

### **C4ISR.CRY.2.6.1 Introduction**

The information-security standards and profiles described in this section facilitate interoperability between cryptologic systems through the use of standardized security interfaces for systems that process, transport, model, or exchange information.

### **C4ISR.CRY.2.6.2 Mandated Standards**

There are no additional mandated standards in this section.

### **C4ISR.CRY.2.6.3 Emerging Standards**

There are no emerging standards in this section.

## **C4ISR.CRY.3 Subdomain-Specific Services and Interfaces**

### **C4ISR.CRY.3.1 Introduction**

Some cryptologic processing is performed using special-purpose devices (SPDs) that may be embedded within larger host systems or remotely located devices. Cryptologic systems encompass both real-time and non-real-time SPDs. The communications processing, signal processing, and mathematical analysis are performed in real-time by embedded systems that require speeds at least three orders of magnitude higher than traditional C4I systems. Real-time systems also require deterministic scheduling and robust fault tolerance.

### **C4ISR.CRY.3.2 Mandated Standards**

#### **C4ISR.CRY.3.2.1 Small-Scale Special-Purpose Devices**

A Small-Scale Special-Purpose Device (SPD) consists of one or more special-purpose boards (may be Government-developed) hosted by a DII COE-compliant computer. These boards use ASICs and PLDs typically designed and developed for the cryptologic community.

Cryptologic systems using PCI cards shall comply with the following mandated standard:

- [Peripheral Component Interconnect \(PCI\) Standard](#) Version 2.2, 1999.

Cryptologic systems using PCMCIA cards shall comply with the following mandated standard:

- [PC Card Standard](#), March 1997 Release (The PC Card standard is a Personal Computer Memory Card International Association (PCMCIA) standard).

#### **C4ISR.CRY.3.2.2 Backplanes and Circuit Cards**

To keep pace with a dynamic threat environment, Cryptologic systems often require the ability to quickly insert new technology. Standards for backplanes and circuit cards facilitate interoperability and modernization and can provide a “plug and play” capability.

Cryptologic systems using VME backplanes and circuit cards shall comply with the following mandated standard:

- [ANSI/VITA 1- 1994](#), American National Standard for VME64.

Cryptologic systems using VXI backplanes and circuit cards shall comply with the following mandated standard:

- [IEEE 1155-1992](#), IEEE Standard for VMEbus Extensions for Instrumentation (VXI).

#### **C4ISR.CRY.3.2.3 Conduction Cooling**

Cryptologic systems that require conduction cooling of circuit cards shall comply with the following mandated standard:

- [IEEE 1101.2-1992](#), IEEE Standard for Mechanical Core Specifications for Conduction Cooled Eurocards.

#### **C4ISR.CRY.3.3 Emerging Standards**

##### **C4ISR.CRY.3.3.1 Backplanes and Circuit Cards**

CompactPCI (cPCI) is a competing bus standard that uses the same form factor as VME and the protocols of the much smaller PCI standard, which is emerging.

- [CompactPCI \(cPCI\)](#) Version 1.0, 1996.

Page intentionally left blank.

# Nuclear Command and Control Subdomain Annex for the C4ISR Domain

## C4ISR.NCC.1 Subdomain Overview

### C4ISR.NCC.1.1 Purpose

The Nuclear Command and Control (NCC) Subdomain Annex identifies elements (i.e., standards, interfaces, and service areas) specific to the functional areas of nuclear command and control that are additions to those standards listed in Section 2 of the JTA Core and in the C4ISR Domain Annex. These additions support the functional requirements of nuclear command and control (C<sup>2</sup>) systems.

### C4ISR.NCC.1.2 Background

This NCC Subdomain Annex to the Joint Technical Architecture (JTA) has been developed to provide standards for programs being developed or maintained by USAF/AFMC/ESC/ND.

### C4ISR.NCC.1.3 Subdomain Description

The NCC Subdomain Annex to the JTA mandates the minimum set of standards and guidelines for nuclear C<sup>2</sup> systems.

### C4ISR.NCC.1.4 Scope and Applicability

This part of the C4ISR domain establishes the minimum set of rules governing information technology within nuclear command and control systems. The scope includes standards for information processing; information transfer; information modeling, metadata, and information exchange; human-computer interface; and information security.

The Nuclear Command and Control subdomain constitutes *only a part* of the larger command and control part of C4ISR. As such, this subdomain does not cover technical architecture details for any part of the C4ISR spectrum other than the nuclear C<sup>2</sup> portion. Nuclear C<sup>2</sup> can use a variety of strategic and tactical C<sup>2</sup> systems, but the standards listed in this subdomain apply to these systems when used for nuclear C<sup>2</sup> missions. This annex covers nuclear C<sup>2</sup> from the JCS and nuclear CINC down to the last human in the loop prior to the nuclear weapon. The scope of this subdomain *excludes* the following:

- ☐ Nuclear (and non-nuclear) weapon systems.
- ☐ Munition-specific communications links (e.g., links between a Launch Control Center and a missile silo).
- ☐ Integrated Tactical Warning and Attack Assessment (ITW/AA) systems.

The JTA mandates the minimum set of standards and guidelines for the acquisition of all DoD systems that produce, use, or exchange information. The main body of the JTA (the “core”) provides the standards that are applicable across the entire DoD information technology spectrum. If a service area in the core applies to an NCC system being developed, and there is no corresponding service area in the C4ISR Domain Annex, then the standard(s) listed in a core service area apply. The mandates found in the C4ISR Domain Annex are intended to augment those found in the core. If additional service area standards are found in the C4ISR Domain Annex, the developer must select

the service area standards from both the core and the C4ISR Domain Annex. Similarly, the NCC Subdomain Annex is intended to augment the C4ISR Domain Annex. Applicable service area mandates found in the NCC Subdomain Annex must be used in addition to the service area mandates found in the C4ISR Domain annex and the core. When multiple mandates are required in this process, the mandate selection offering the best technical and business solution is the preferred decision.

The NCC Subdomain Annex may list multiple standards for individual service areas. Similarly, the core and the subdomain annex may offer multiple solutions within a single service area. For these cases, it is not required that the developer implement all standards listed. A subset should be selected based on technical merit and design/cost constraints. Future versions of this subdomain annex will have detailed information on standards implementation and standards profiles. The intent, as previously stated, is to promote a minimum set of standards for interoperability among NCC systems.

### **C4ISR.NCC.1.5 Technical Reference Model**

This subdomain uses the DoD Technical Reference Model cited in [Section 2.1.2.1](#) of the JTA as its framework.

### **C4ISR.NCC.1.6 Subdomain Annex Organization**

The organization of this subdomain annex is intended to mirror the organization of the C4ISR Domain Annex to the greatest extent possible. Each section of the annex, except for Part 1 (Overview), is divided into three subsections as follows. The first subsection, Introduction, is for information only. It defines the purpose and scope of the subsection and provides background descriptions and definitions unique to the section. The second subsection contains additional mandated standards for the identified service area. The third subsection, Emerging Standards, provides an abbreviated description of candidates that are expected to move into the mandated subsection within a short period. As defined within the JTA Core, this transition should occur within 3 years of publication of the standard in the emerging subsection.

C4ISR Application Platform Entity service areas are addressed in Section C4ISR.NCC.2 as additions to the JTA Core and C4ISR Domain Annex. Additional application software entity service areas required to support NCC subdomain systems will be addressed in Section C4ISR.3, Domain-Specific Service Areas.

## **C4ISR.NCC.2 Additions to C4ISR Domain Service Areas**

### **C4ISR.NCC.2.1 Introduction**

This section provides standards available to this subdomain in addition to those listed in the JTA Core and C4ISR Domain Annex.

### **C4ISR.NCC.2.2 Information-Processing Standards**

#### **C4ISR.NCC.2.2.1 Introduction**

This annex provides additional information-processing standards.

**C4ISR.NCC.2.2.2 Mandated Standards**

There are currently no additional mandated standards applicable to this subdomain with respect to Information-Processing Standards.

**C4ISR.NCC.2.2.3 Emerging Standards**

This version of the NCC Subdomain Annex does not identify any emerging standards for information processing.

**C4ISR.NCC.2.3 Information-Transfer Standards****C4ISR.NCC.2.3.1 Introduction**

Proper handling of NCC information is vital to national security. Information transfer standards and profiles described in this section cover dissemination and data link mandates for NCC systems. This section identifies systems and the interface standards required for interoperability between and among NCC systems and are in addition to the systems described in the JTA Core and the C4ISR Domain Annex.

**C4ISR.NCC.2.3.2 Mandated Standards**

Additional mandated standards for information transfer for the NCC Subdomain Annex are provided in this section.

For radio subsystems operating in the LF/VLF frequency bands, the following standards specify the special modes used by Air Force and Navy forces in support of the USSTRATCOM mission.

For sending and receiving High Data Rate (HIDAR)-mode communications the following standard is mandated:

- [HDR-SSS-01-S-REC0](#), Very Low Frequency/Low Frequency (VLF/LF) High Data Rate (HIDAR) Mode Standard.

For sending and receiving Minimum Essential Emergency Communications Network (MEECN) Message Processing-Mode (MMPM) communications the following standard is mandated:

- [NAVELEX 28687-0119-404](#); MEECN Message Processing Mode Standard.

**C4ISR.NCC.2.3.3 Emerging Standards**

This version of the NCC Subdomain Annex does not identify any emerging standards for information transfer.

**C4ISR.NCC.2.4 Information-Modeling, Metadata, and Information-Exchange Standards****C4ISR.NCC.2.4.1 Introduction**

This section identifies standards applicable to information modeling and exchange of information for NCC systems. Information-Modeling, Metadata, and Information-Exchange Standards pertain to activity models, data models, data definitions, and information exchange among NCC systems.

### **C4ISR.NCC.2.4.2 Mandated Standards**

The following standards for NCC for Emergency Action Messages (EAM) are mandated:

- [Emergency Action Procedures \(EAP\)](#) Chairman Joint Chiefs of Staff (CJCS), Volume V, "CJCS Control Orders (U)," revised annually (U.S. TOP SECRET).
- [EAP CJCS Volume VII](#) "EAM Dissemination and Force Report Back (U)," revised annually (U.S. TOP SECRET).

### **C4ISR.NCC.2.4.3 Emerging Standards**

This version of the NCC Subdomain Annex does not identify any emerging standards for information modeling, metadata and information exchange.

## **C4ISR.NCC.2.5 Human-Computer Interface Standards**

### **C4ISR.NCC.2.5.1 Introduction**

This subsection identifies the mandatory standards, profiles, and practices for human-computer interfaces within the NCC subdomain. The human-computer interface (HCI) is an extremely important NCC function.

### **C4ISR.NCC.2.5.2 Mandated Standards**

This section will provide standards that uniquely apply to the HCI of NCC systems.

### **C4ISR.NCC.2.5.3 Emerging Standards**

This section contains emerging HCI standards applicable to Nuclear C<sup>2</sup> systems.

To reduce training, the standard HCI for all EAM injection processors will be consistent with the following emerging standard:

- [HMI DIRECT ICD](#), "Human-Machine Interface (HMI) Design Criteria," CDRL 135C-03,V3.0, 5 March 99.

## **C4ISR.NCC.2.6 Information-Security Standards**

### **C4ISR.NCC.2.6.1 Introduction**

Information-security standards protect information and the processing platform resources. They must often be combined with security procedures, which are beyond the scope of the information-technology service areas, to fully meet operational security requirements. Security services include security policy, accountability, assurance, user authentication, access control, data integrity and confidentiality, non-repudiation, and system availability control.

### **C4ISR.NCC.2.6.2 Mandated Standards**

There are currently no additional mandated standards applicable to this subdomain with respect to Information-System Security Standards.

### **C4ISR.NCC.2.6.3 Emerging Standards**

This version of the NCC Subdomain Annex does not identify any emerging standards for information-security.



### **C4ISR.NCC.3 Subdomain-Specific Service Areas**

This version of the NCC Subdomain Annex does not define any additional service areas.

Page intentionally left blank.

# Space Reconnaissance Subdomain Annex for the C4ISR Domain

## **C4ISR.SR.1 Subdomain Overview**

### **C4ISR.SR.1.1 Purpose**

The Space Reconnaissance (SR) Subdomain Annex (SRSA) to the C4ISR domain identifies the minimum set of technical supporting interfaces between SR Information Technology (IT) systems and other Department of Defense (DoD) systems. The IT definition used within the SRSA is found in JTA Appendix A. The standards contained here are mandated for SR IT interfaces in addition to those standards found in the C4ISR Domain and in the JTA. The SRSA will provide the foundation for the seamless flow of information and interoperability among all future and upgraded SR space and associated ground IT systems, IT technology concept demonstrations, and with related DoD IT systems. Standards used by SR legacy systems to support internal interfaces (i.e., interfaces to non-DoD systems) have not been examined and cannot be presumed to be JTA-compliant.

### **C4ISR.SR.1.2 Background**

Space Reconnaissance (SR) Information Technology (IT) standards represent the communities engaged in all aspects of creating, deploying, and employing reconnaissance assets for national defense. The standards within JTA (including the SRSA) support a range of functions including the areas described in the functional model in Figure C4ISR-SR-1. The SRSA supplies a special focus on space-related functions unique within JTA. The SRSA identifies additional standards that have been determined to be unique to SR communications and data processing. Standards not unique to SR are contained in the C4ISR Domain Annex or in the JTA Core. The location and application of standards within the JTA Core, C4ISR domain and SRSA are in accordance with the element normalization rules described in (JTA) [Section 1.4](#). Future versions of the SRSA will address standards not previously identified, or not yet mature (under the JTA rule set), but expected to be developed into SRSA mandated standards. When identified, these standards will be placed in the emerging standards sections in each of the subdomain's service areas.

### **C4ISR.SR.1.3 Subdomain Description**

The SRSA adds to the standards and guidance required for the Space Reconnaissance subdomain and is meant to complement both the C4ISR Domain Annex and the JTA Core. The SRSA contains information on standards implementation and standards profiles.

The SRSA will be maintained by the SRSA Working Group chaired by the National Reconnaissance Office (NRO) with all changes made in concert with the normal JTA revision procedures. Modifications to the SRSA will be coordinated with the established working group for the SRSA.

### **C4ISR.SR.1.4 Scope and Applicability**

JTA compliance, where applicable, is required for acquisition of upgraded and new SR IT systems as well as advanced technology demonstrations. The SRSA scope comprises SR IT system standards for external interfaces to DoD IT systems. The standards mandated in the JTA Core, C4ISR Domain Annex, and SRSA are applicable to the external SR IT interfaces. The SRSA includes those pending SRSA IT systems whose system specifications and design are intended for near-term acquisition and which include DoD interfaces, where appropriate. The SRSA is also applicable

where needed for the seamless flow of information and interoperability among SR systems with airborne and other intelligence, surveillance, and reconnaissance systems and is intended to complement their subdomain annexes to the C4ISR domain.

The JTA mandates the minimum set of standards and guidelines for the acquisition of all DoD IT systems that produce, use, or exchange information. The main body of the JTA (the “core”) provides the standards that are applicable across the entire DoD IT spectrum. If a service area in the core applies to an SR system being developed and there is no corresponding service area in the C4ISR, then the standard(s) listed in the core service area applies. The mandates found in the C4ISR Domain Annex are intended to augment those found in the core. If additional service area standards are found in the C4ISR Domain Annex, the developer must select the service area standards from both the core and the C4ISR Domain Annex. Similarly, the SRSA is intended to augment the C4ISR Domain Annex. Applicable service area mandates found in the SRSA must be used in addition to the service area mandates found in the C4ISR Domain Annex and the JTA Core. When multiple mandates are required in this process, the mandate selection offering the best technical and business case solution is the preferred decision.

The SRSA may list multiple standards for individual service areas. Similarly, the JTA Core and the C4ISR Domain Annex may offer multiple solutions within a single service area. For these cases, it is not required that the developer implement all standards listed. A subset should be selected based on technical merit, interoperability, and design/cost constraints. The SRSA contains information on standards implementation and standards profiles. The intent, as previously stated, is to promote a minimum set of standards for interoperability between SR and DoD IT systems.

#### **C4ISR.SR.1.5 Technical Reference Model**

The “Integrated” DoD Technical Reference Model (TRM) is derived from the original Technical Architecture Framework for Information Management (TAFIM) reference model and Society of Automotive Engineers (SAE) Generic Open Architecture (GOA) model. GOA provides extensions to support real-time computing environments such as those found in weapon systems. The “Integrated” DoD TRM is primarily a software-based model. It was originally developed to cover information technology within DoD. The “Integrated” DoD TRM framework concept can be extended to cover SR external interface with DoD systems. However, domain-specific standards such as those required to cover all national space reconnaissance do not fully fit within this software-based model and so work continues as noted below.

##### **C4ISR.SR.1.5.1 SR TRM Defined**

Various reference models are being evaluated for SR applicability. In the interim, the SRSA uses the “Integrated” DoD Technical Reference Model (TRM) to cover SR system external interfaces with DoD IT systems. Where exceptions to the “Integrated” DoD TRM are required, it will be noted in this subdomain annex. The “Integrated” DoD TRM is shown in [Figure 2.1-1](#) of the JTA.

##### **C4ISR.SR.1.5.2 SR Functional Reference Model Defined**

The Space Reconnaissance Functional Reference Model (FRM) is a representation of the top-level functional areas necessary to acquire, process, and provide access to reconnaissance information (currently IMINT, SIGINT, and MASINT) collected with space-borne assets. The model accounts

for functionality and interfaces associated with Satellite Operations, Space/Ground Communications, and Ground Operations, as designated by the vertical bars on the left side of [Figure C4ISR.SR-1](#). Ground operations can be further categorized into Mission Operations and User Support, as designated by the horizontal bars across the bottom of [Figure C4ISR.SR-1](#). Mission Operations are those functions that generate and levy tasking on the collection assets and monitor the status of the operations. User Support includes the functions necessary to convert the collected data into a format meaningful to the users and to disseminate the data. The FRM identifies 16 functional areas within SR and allocates specific functions to these areas. See [Table C4ISR.SR-1](#).

While the types of data are different, the functionality required to task, collect, process, and provide access to the data is similar, and the goal is to establish commonality in as many areas as possible among the IMINT, SIGINT, and MASINT communities. Establishing of the Functional Reference Model is the first step in accomplishing that objective. The FRM provides a functional framework that spans all SR missions and serves as a reference point to identify candidate functional areas for the application of common mechanisms and standards. The evolution of the FRM will allow each of the functions to be evaluated and recommendations to be made, as appropriate, to increase commonality and standardization across SR missions.

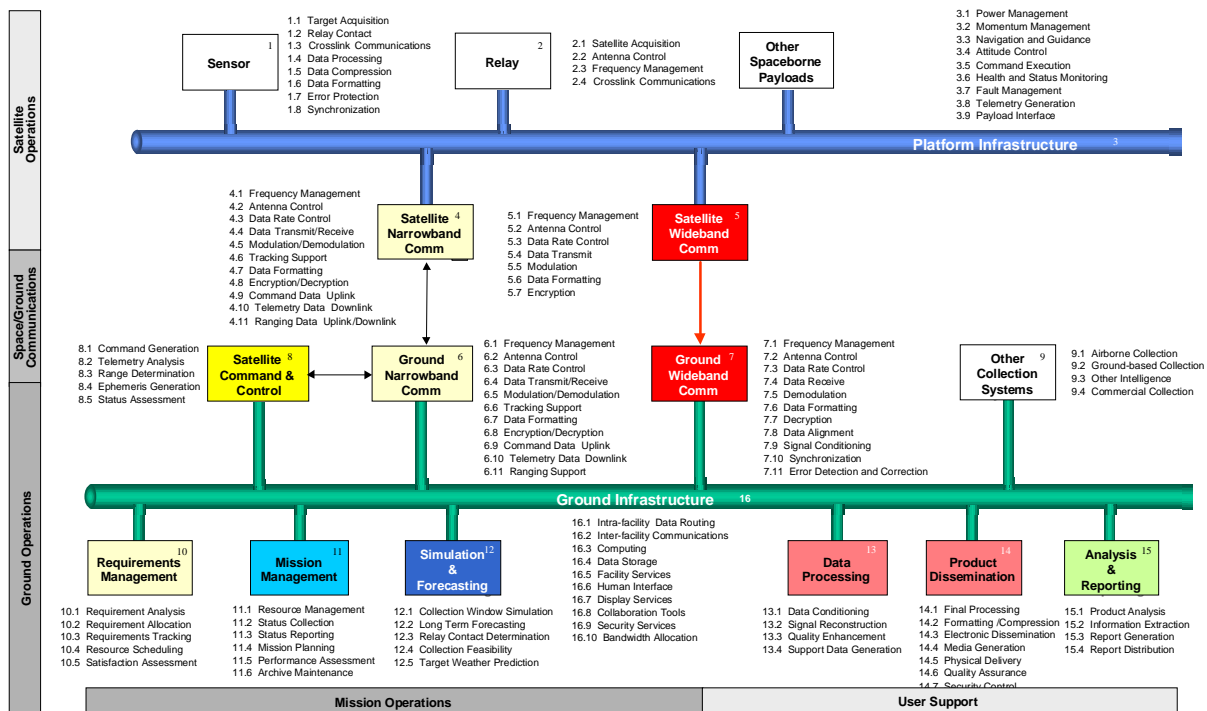


Figure C4ISR.SR-1: Functional Reference Model

**Table C4ISR.SR-1: SR Functional Mapping of JTA**

SR Functions Mapped to JTA Major Sections		Section 2.2	Section 2.3	Section 2.4	Section 2.5	Section 2.6
<b>1</b>	<b>Sensor</b>	X	X			
1.1	Target Acquisition					
1.2	Relay Contact		X			
1.3	Crosslink Communications		X			
1.4	Data Processing	X				
1.5	Data Compression	X				
1.6	Data Formatting	X				
1.7	Error Protection	X				
1.8	Synchronization	X				
<b>2</b>	<b>Relay</b>		X			
2.1	Satellite Acquisition					
2.2	Antenna Control					
2.3	Frequency Management					
2.4	Crosslink Communications		X			
<b>3</b>	<b>Platform Infrastructure</b>	X				
3.1	Power Management					
3.2	Momentum Management					
3.3	Navigation and Guidance					
3.4	Attitude Control					
3.5	Command Execution	X				
3.6	Health and Status Monitoring					
3.7	Fault Detection, Isolation and Diagnostics	X				
3.8	Telemetry Generation	X				
3.9	Payload Interface					
<b>4</b>	<b>Satellite Narrowband Communications</b>	X	X			X
4.1	Antenna Control					
4.2	Data Rate Control		X			
4.3	Modulation/Demodulation	X				
4.4	Tracking Support					

**Table C4ISR.SR-1: SR Functional Mapping of JTA**

SR Functions Mapped to JTA Major Sections		Section 2.2	Section 2.3	Section 2.4	Section 2.5	Section 2.6
4.5	Data Formatting	X				
4.6	Command Data Uplink		X			
4.7	Telemetry Data Downlink		X			
4.8	Ranging Data Uplink/Downlink		X			
4.9	Encryption/Decryption					X
<b>5</b>	<b>Satellite Wideband Communications</b>	<b>X</b>	<b>X</b>			<b>X</b>
5.1	Frequency Management					
5.2	Antenna Control					
5.3	Data Rate Control	X				
5.4	Modulation	X				
5.5	Encryption/Decryption					X
5.6	Data Formatting	X				
5.7	Data Transmit/Receive		X			
<b>6</b>	<b>Ground Narrowband Communications</b>	<b>X</b>	<b>X</b>			<b>X</b>
6.1	Frequency Management					
6.2	Antenna Control					
6.3	Data Rate Control		X			
6.4	Tracking Support					
6.5	Data Formatting	X				
6.6	Command Data Uplink		X			
6.7	Telemetry Data Downlink		X			
6.8	Ranging Support	X	X			
6.9	Encryption/Decryption					X
6.10	Modulation/Demodulation	X				
<b>7</b>	<b>Ground Wideband Communications</b>	<b>X</b>	<b>X</b>			<b>X</b>
7.1	Frequency Management					
7.2	Antenna Control					
7.3	Data Rate Control		X			
7.4	Data Transmit/Receive		X			
7.5	Data Formatting	X				

**Table C4ISR.SR-1: SR Functional Mapping of JTA**

SR Functions Mapped to JTA Major Sections		Section 2.2	Section 2.3	Section 2.4	Section 2.5	Section 2.6
7.6	Decryption					X
7.7	Demodulation	X				
7.8	Data Alignment	X				
7.9	Signal Conditioning	X				
7.10	Synchronization	X				
7.11	Error Detection and Correction	X				
<b>8</b>	<b>Satellite Command and Control</b>	<b>X</b>		<b>X</b>	<b>X</b>	
8.1	Command Generation	X			X	
8.2	Telemetry Analysis	X				
8.3	Range Determination	X				
8.4	Ephemeris Generation			X		
8.5	Status Assessment	X			X	
<b>9</b>	<b>Other Collection Systems</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
9.1	Airborne Collection	X	X	X		X
9.2	Ground-Based Collection	X	X	X	X	X
9.3	Non-NRO Intelligence		X		X	
9.4	Commercial Collection		X			
<b>10</b>	<b>Requirements Management</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
10.1	Requirements Analysis	X		X	X	X
10.2	Requirement Allocation	X	X			
10.3	Requirements Tracking	X		X	X	
10.4	Resource Scheduling	X		X		
10.5	Satisfaction Assessment	X		X	X	
<b>11</b>	<b>Mission Management</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	
11.1	Resource Management	X	X	X		
11.2	System Management	X	X	X	X	
11.3	Status Collection		X			
11.4	Status Reporting	X	X		X	X
11.5	Mission Planning	X		X	X	
11.6	Performance Assessment	X		X	X	



**Table C4ISR.SR-1: SR Functional Mapping of JTA**

SR Functions Mapped to JTA Major Sections		Section 2.2	Section 2.3	Section 2.4	Section 2.5	Section 2.6
11.7	History Data Maintenance	X			X	
<b>12</b>	<b>Simulation and Forecasting</b>	<b>X</b>		<b>X</b>	<b>X</b>	
12.1	Collection Window Simulation	X		X	X	
12.2	Long-Term Forecasting	X		X	X	
12.3	Relay Contact Determination	X		X		
12.4	Collection Feasibility	X		X	X	
12.5	Target Weather Prediction			X		
<b>13</b>	<b>Data Processing</b>	<b>X</b>		<b>X</b>	<b>X</b>	
13.1	Data Conditioning	X				
13.2	Signal Reconstruction	X				
13.3	Quality Enhancement	X				
13.4	Support Data Generation	X		X	X	
<b>14</b>	<b>Product Dissemination</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
14.1	Final Processing	X		X		
14.2	Formatting/Compression	X				
14.3	Electronic Dissemination		X	X		X
14.4	Media Generation	X				
14.5	Physical Delivery			X		X
14.6	Security Labeling	X			X	X
14.7	Quality Assurance	X		X	X	
14.8	Security Control					x
<b>15</b>	<b>Analysis &amp; Reporting</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
15.1	Product Analysis	X		X	X	
15.2	Information Extraction	X			X	
15.3	Report Generation			X	X	
15.4	Report Distribution					
15.5	Data Normalization (TBR)					
<b>16</b>	<b>Ground Infrastructure</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
16.1	Intra-Facility Data Routing		X			

**Table C4ISR.SR-1: SR Functional Mapping of JTA**

SR Functions Mapped to JTA Major Sections		Section 2.2	Section 2.3	Section 2.4	Section 2.5	Section 2.6
16.2	Inter-Facility Communications		X			
16.3	Computing	X			X	X
16.4	Data Storage		X	X	X	X
16.5	Facility Services					
16.6	Human Interface				X	
16.7	Display Services	X			X	
16.8	Collaboration Tools	X			X	
16.9	Security Services	X			X	X
16.10	Bandwidth Allocation		X	X		X

### **C4ISR.SR.1.6 Subdomain Annex Organization**

The organization of this subdomain annex follows the JTA-approved format for developing domain and subdomain annexes. The SRSA contains three parts. C4ISR.SR.1 is the Overview. C4ISR.SR.2 includes mandatory standard profiles, practices, and emerging standards that are applicable to the SR subdomain. Emerging standards provide an abbreviated description of candidates expected to move into the mandated subsection within a short period. As defined within the core of the JTA, this transition should occur within 3 years of publication of the standard in the emerging subsection. C4ISR.SR.3 is reserved for those mandates that are subdomain-specific because they do not map directly to the JTA Core service areas.

## **C4ISR.SR.2 Additions to C4ISR Domain Service Areas and JTA Core**

### **C4ISR.SR.2.1 Introduction**

The SRSA, in conjunction with the JTA Core and the C4ISR Domain Annex, provides the technical foundation for migrating SR IT systems toward a technical architecture that provides interoperable interfaces to DoD systems. This section of the SRSA lists the minimum, mandatory set of standards for SR systems. This section includes information-processing; information-transfer; information-modeling, metadata, and information-exchange; human-computer interface; and information systems security standards. This part of the SRSA does not contain rules for the physical, mechanical, or electrical components of systems, even when these are related to information technology.

### **C4ISR.SR.2.2 Information-Processing Standards**

#### **C4ISR.SR.2.2.1 Introduction**

##### **C4ISR.SR.2.2.2 Mandated Standards**

This version of the SRSA does not specify any additional standards for information processing.

### **C4ISR.SR.2.2.3 Emerging Standards**

This version of the SRSA does not identify any emerging standards for information processing. An ongoing effort by the NRO will identify any emerging standards for future versions of the JTA.

## **C4ISR.SR.2.3 Information-Transfer Standards**

### **C4ISR.SR.2.3.1 Introduction**

Information-transfer standards are used to disseminate National and Tactical intelligence information to Joint service tactical units. This section identifies interface standards required for interoperability between SR IT and other DoD ISR systems in addition to the standards cited in the JTA Core and C4ISR domain.

### **C4ISR.SR.2.3.2 Mandated Standards**

The following additional information-transfer standard is mandated for SR communication systems:

- [GR-253](#), Synchronous Optical Network (SONET) Transport Systems: Common Generic Criteria, Rev01, Bellcore, December 1997.

#### **C4ISR.SR.2.3.2.1 Hardware Mandated Standards**

The following hardware-related information transfer standard is mandated for SR communication systems:

- [EIA RS-422](#), Electrical Characteristics of Balanced Voltage Digital Interface Circuits, December 1978.

### **C4ISR.SR.2.3.3 Emerging Standards**

This version of the SRSA does not identify any emerging information-transfer standards.

## **C4ISR.SR.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

### **C4ISR.SR.2.4.1 Introduction**

### **C4ISR.SR.2.4.2 Mandated Standards**

This version of the SRSA does not specify any additional standards for information modeling, metadata, and information exchange. An ongoing effort by the NRO will identify applicable standards for future versions of this annex.

### **C4ISR.SR.2.4.3 Emerging Standards**

This version of the SRSA does not identify any emerging standards for information modeling, metadata, and information exchange. An ongoing effort by the NRO will identify any emerging standards for future versions of the JTA.

**C4ISR.SR.2.5 Human-Computer Interface Standards****C4ISR.SR.2.5.1 Introduction****C4ISR.SR.2.5.2 Mandated Standards**

This version of the SRSA does not specify any additional standards for human-computer interfaces.

**C4ISR.SR.2.5.3 Emerging Standards**

This version of the SRSA does not identify any emerging standards for human-computer interfaces. An ongoing effort by the NRO will identify any emerging standards for future versions of the JTA.

**C4ISR.SR.2.6 Information-Security Standards****C4ISR.SR.2.6.1 Introduction****C4ISR.SR.2.6.2 Mandated Standards**

This version of the SRSA does not specify any additional standards for information-security.

**C4ISR.SR.2.6.3 Emerging Standards**

This version of the SRSA does not identify any emerging standards for information-security. An ongoing effort by the NRO will identify any emerging standards for future versions of the JTA.

**C4ISR.SR.3 Subdomain-Specific Service Areas**

There are no subdomain-specific service areas identified at this time.

# Combat Support Domain Annex

## CS.1 Domain Overview

### CS.1.1 Purpose

The Combat Support (CS) Domain Annex was developed to provide agile combat support elements and other domains a common technical architecture with which to integrate. The goals for the Combat Support (CS) Domain Annex are: 1) improve applications interoperability, promote improved business practices, and reduce operations costs within the combat support domain, and 2) improve interoperability and increase combat support information access with C4ISR systems.

### CS.1.2 Background

There are numerous information-technology services that support warfighter activities. These services need to be interoperable with the rest of the DoD community.

### CS.1.3 Domain Description

The Combat Support domain addresses those specific elements necessary for the production, use, or exchange of information within and among systems supporting personnel, logistics, and other functions required to maintain operations or combat (see [Figure CS-1](#)). The Combat Support domain consists of automated systems that perform combat service support and administrative business functions, such as acquisition, finance, human resources management, legal, logistics, transportation, and medical functions.

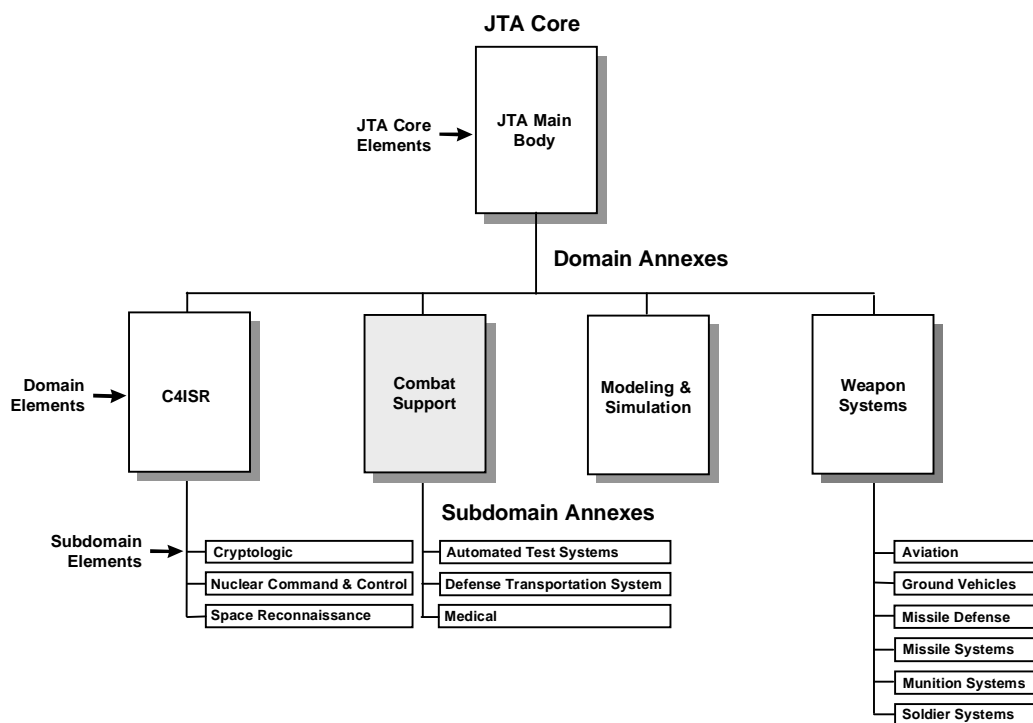


Figure CS-1: Notional JTA Hierarchy

#### **CS.1.4 Scope and Applicability**

The Combat Support Domain Annex identifies standards applicable to DoD Combat Support Elements, e.g., Logistics, EDI, CALS, Medical, Transportation.

#### **CS.1.5 Technical Reference Model**

This domain uses the Technical Reference Model (TRM) cited in [Section 2.1.2.1](#) of the JTA as its framework. Combat Support Application Platform Entity service areas are addressed in Section CS.2 as additions to the JTA Core. Additional Application Software Entity service areas required to support Combat Support domain systems are addressed in Section CS.3 as domain-specific service areas.

#### **CS.1.6 Annex Organization**

The Combat Support Domain Annex consists of three sections. CS.1 contains the overview, CS.2 contains those information-technology mandated and emerging standards that are additions to the standards contained in the core, and CS.3 is reserved for those mandates for combat support that are domain-specific because they do not map directly to the core service areas.

### **CS.2 Additions to JTA Core**

#### **CS.2.1 Introduction**

The Combat Support domain embraces the principles established in Section 2 of the JTA. Only those paragraphs from the core that have additions are included below.


#### **CS.2.2 Information-Processing Standards**

##### **CS.2.2.1 Introduction**

##### **CS.2.2.2 Mandated Standards**

##### **CS.2.2.2.1 Document Interchange**


Continuous Acquisition and Life-Cycle Support (CALS) has developed a set of standards that apply to this service area. CALS Standard Generalized Markup Language (SGML) profiles the ISO standard (8879) by selecting a particular Document Type Definition (DTD) and other parameters that help standardize the development of technical manuals for DoD. CALS also developed a handbook for applying CALS SGML (MIL-HDBK-28001, 30 June 1995). Although Hypertext Markup Language (HTML) is also a subset of SGML, it is not sufficiently robust enough for TM (TO) development. [eXtensible Markup Language (XML) may replace both CALS SGML and HTML in the future.] CALS also has a standard for archiving documents (1840C). The mandated standards for the CALS Document Interchange service area are:

- [MIL-PRF-28001C](#), Markup Requirements and Generic Style Specification for Electronic Printed Output and Exchange of Text (CALS SGML), 2 May 1997.
- [MIL-STD-1840C](#), Automated Interchange of Technical Information (AITI), 26 June 1997. 

##### **CS.2.2.2.2 Graphics Data Interchange**



CALS has developed a metadata standard, MIL-PRF-28003A, which profiles the ISO Computer Graphics Metafile (CGM) standard (ISO 8632). Also, a CALS Raster Standard, MIL-PRF-

28002C, puts raster graphics into a binary format. The mandated standards for the CALS Graphics Data Interchange service area are:





- [ANSI/ISO/IEC 8632](#) Information Technology – Computer Graphics – Metafile for the Storage and Transfer of Picture Description Information [part 1:1992 Functional Specifications (with amendment 1:1994 Rules for Profiles and with amendment 2:1995 Application Structuring Extensions)] and [part 3:1992 Binary Coding (with amendment 1:1994 Rules for Profiles and with amendment 2:1995 Application Structuring Extensions)] as profiled by MIL-PRF-28003A dated 15 November 1991 with Amendment 1 dated 14 August 1992, Performance Specification, Digital Representation for Communications of Illustration Data: CGM Application Profile.
- [MIL-PRF-28002C](#), Performance Specification, Requirements for Raster Graphics Representation in Binary Format, 30 September 1997. 

#### **CS.2.2.2.3 Product Data Interchange**

Several standards exist for exchanging product data. The ANSI/US PRO/IPO-100-1993 and MIL-PRF-28000A standards for Initial Graphics Exchange Specification (IGES), define a neutral data format that allows the digital exchange of information between Computer-Aided Design (CAD) and Computer-Aided Manufacturing (CAD/CAM) systems. IGES supports digital design and manufacturing information about an object sufficient to support manufacturing and construction only. MIL-PRF-28000A contains applications subsets and protocols that form profiles of IGES Version 4.0. The following standards are mandated:

- [ANSI/US Product Data Association \(PRO\)-100-1996](#), Initial Graphics Exchange Specification (IGES), V5.3, 23 September 1996. 
- [MIL-PRF-28000A](#) with Amendment 1, Digital Representation for Communications of Product Data: IGES Application Subsets and IGES Application Protocols, 14 December 1992. 

A standard for circuit board description in digital form is ANSI/IPC-D-350D. An associated standard for describing hardware product data in an unambiguous way is Federal Information Processing Standard Publication (FIPS PUB) 172-1 which adopts ANSI/IEEE 1076 and includes valuable interpretations of the adopted standard. Other product data can be stored digitally using MIL-STD-1840C. The following standards are mandated:

- [ANSI/PC-D-350D](#), Printed Board Description in Digital Form, July 1, 1992. 
- [FIPS PUB 172-1](#), VHSIC Hardware Description Language (VHDL), 1995 January 27. 
- [ANSI/IEEE 1076](#), 1993, IEEE Standard VHDL Language Reference Manual. 
- [MIL-STD-1840C](#), Automated Interchange of Technical Information, 26 June 1997. 

Bar code standards are used to identify packages and products. They can be used to help identify products being shipped and stocked. MIL-STD-1189B was canceled but the notice directed the user to AIM BC-1, a linear bar code standard. (See [DTS.2.2.2.1](#) for two-dimensional standard.) The following standard is mandated:

- [ANSI/AIM-BC1-1995](#), Uniform Symbology Specification Code 39, 16 August 1995. 

#### CS.2.2.2.4 Electronic Data Interchange

Electronic Data Interchange (EDI) is a new Base Service Area specializing in the computer-to-computer exchange of business information using a public standard. EDI is a central part of Electronic Commerce (EC), the paperless exchange of business information. FIPS Pub161-2 establishes the Federal EDI Standards Management Coordinating Committee (FESMCC) to harmonize the development of EDI transaction sets and message standards among Federal agencies, and the adoption of Government-wide implementation conventions. The Federally approved Implementation Conventions may be viewed on the Web at <http://www.antd.nist.gov>.

The DoD EDI Standards Management Committee (EDISMC) was established to coordinate EDI standardization activities within DoD. The EDISMC supports the development, adoption, publication, and configuration management of EDI implementation conventions for DoD. The DoD EDISMC manages the efforts of several Functional Working Groups (FWGs). DoD FWGs have been established in the following areas: Logistics, Finance, Healthcare, Transportation, Procurement, and Communication, Command and Control. EDISMC-approved implementation conventions are submitted to the FESMCC for approval as Federal implementation conventions. DoD-approved implementation conventions may be viewed on the Web at <http://www-edi.itsi.disa.mil>.

FIPS-PUB 161-2, 22 May 1996, Electronic Data Interchange (EDI) adopts, with specific conditions, ANSI ASC X12, UN/EDIFACT and ANSI HL7. HL7 can be found in Combat Support Medical Subdomain Annex. The following standards are mandated:

- [ANSI ASC X12](#) Electronic Data Interchange (ASC X12S 97-372 is latest edition), as profiled by FIPS PUB 161-2, Electronic Data Interchange, 22 May 1996.
- [ISO UN/EDIFACT](#), as profiled by FIPS PUB 161-2, Electronic Data Interchange, 22 May 1996.

#### CS.2.2.2.5 Configuration Management Data Interchange

A new standard, MIL-STD-2549, has been developed to provide for electronic exchange of configuration management data. It is meant to replace MIL-STD-973 when procuring configuration management information. The following standard is mandated for use:

- [MIL-STD-2549](#), Department of Defense Interface Standard, Configuration Management Data Interface, 30 June 1997.

### CS.2.2.3 Emerging Standards

#### CS.2.2.3.1 Product Data Interchange

ISO 10303, commonly called Standard for the Exchange of Product Model Data (STEP), is a standard for the computer-interpretable representation and exchange of product data. STEP provides a neutral mechanism capable of exchanging product data between different Computer-Aided Engineering (CAE), and CAD/CAM applications. STEP supports the entire life cycle of a product, independent from any particular system, and supports 3D geometry, including 3D wireframe and 3D solid geometry. The following portions of STEP, ISO 10303, Industrial Automation Systems and Integration - Product Data Representation and Exchange are emerging:



- [ISO 10303](#), Industrial Automation Systems and Integration – Product Data Representation and Exchange; Part 1, Overview and fundamental concepts, 1994; Part 11, Description methods: The EXPRESS language reference manual, 1994; Part 12, Description methods: The EXPRESS-I language reference manual, 1997; Part 21, Implementation methods: Clear text encoding of the exchange structure, 1994; Part 22, Implementation methods: Standard data access interface specification, 1998; Part 31, Conformance testing methodology and framework: General concepts, 1994; Part 32, Conformance testing methodology and framework: Requirements on testing laboratories and clients, 1998; Part 41, Integrated generic resources: Fundamentals of product description and support, 1994; Part 42, Integrated generic resources: Geometric and topological representation, 1994; Part 43, Integrated generic resources: Representation structure, 1994; Part 44, Integrated generic resources: Product structure configuration, 1994; Part 45, Integrated generic resources: Materials, 1998; Part 46, Integrated generic resources: Visual presentation, 1994; Part 47, Integrated generic resources: Shape variation tolerances, 1997; Part 49, Integrated generic resources: Process structure and properties, 1998; Part 101, Integrated application resources: Draughting, 1994; Part 105, Integrated application resources: Kinematics, 1996; Part 201, Application protocol: Explicit draughting (equivalent to IGES), 1994; Part 202, Application protocol: Associative draughting, 1996; Part 203, Application protocol: Configuration controlled design, 1994; Part 224, Application protocol: Mechanical product definition for process planning using machining features, 1999.

Effective use of STEP to share product model data for systems requires a companion standard, ISO/IEC 13584, to exchange CAD Part Libraries (PLIB). The PLIB supplies a data model of the supplier part library, supplier identification, and part geometry. The following standard is emerging:

- [ISO/IEC 13584:1998](#), Industrial Automation Systems and Integration – Parts Library – Part 20; Logical Resource: Logical Model of Expressions; Part 42: Description Methodology: Methodology for Structuring Part Families.

MIL-PRF-28000B - A profile of IGES 5.3. This CALS profile is based on the Y2K-compliant version of IGES and will require all IGES data files to be submitted in a Y2K-compliant format. The following standard is emerging for IGES:

- [MIL-PRF-28000B](#), Digital Representation for Communication of Product Data: IGES Application Subsets and IGES Application Protocols (Draft), 1 July 1999.

### **CS.2.3 Information-Transfer Standards**

There are no mandated or emerging standards for the Combat Support Information-Transfer Standards section.

### **CS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

There are no mandated or emerging standards for the Combat Support Information-Modeling, Metadata, and Information-Exchange Standards section.

### **CS.2.5 Human-Computer Interface Standards**

There are no mandated or emerging standards for the Combat Support Human-Computer Interface Standards section.

## **CS.2.6 Information-Security Standards**

EC/EDI have security services associated with ANSI ASC X12 transactions. ANSI ASC X12.58 is a description of that security but is not mandated.

## **CS.3 Domain-Specific Service Areas and Interfaces**

### **CS.3.1 Electronic Business/Electronic Commerce**

#### **CS.3.1.1 Introduction**

The Electronic Business/Electronic Commerce (EB/EC) Section provides standards useful for any DoD effort involved in electronic business operations. DoD focus on EB/EC has been limited primarily to acquisition-centric transactions. This limited scope has precluded DoD from taking full advantage of the significant process improvement and reengineering opportunity available through the implementation of EB/EC concepts and technology. EB/EC within DoD must now be thought of in a significantly larger perspective, which permit support of Finance, Procurement, Logistics, Personnel, Medical, Transportation, and Acquisition functions. Additional information can be found in the JECPO STD 1, DoD Electronic Business/Electronic Commerce Standards Profile (Draft), June 1999.

#### **CS.3.1.2 Mandated Standards**

##### **CS.3.1.2.1 Smart Card Technology Standards**

Smart Card standards are derived from identification-card standards and detail the physical, electrical, mechanical and application programming interface. ISO 7816 series is for contact Smart Cards while ISO 10536 specifies the standards for various types of contactless Smart Cards. Smart-Card standards are essential for interoperability between multivendor cards and readers. The following ISO/IEC Series Standards for Smart Cards are mandated:

- [ISO/IEC 7816](#) Identification Cards - Integrated Circuit(s) cards with contacts; Part 1, Physical characteristics, October 1998; Part 2, Dimensions and location of the contacts, March 1999; Part 3, Electronic signals and transmission protocols, December 1997; Part 4, Interindustry commands for interchange, September 1995; Part 5, Numbering system and registration procedure for application identifiers, June 1994; Part 6, Interindustry Data Elements, May 1996; Part 7, Interindustry commands for Structured Card Query Language (SCQL), March 1999.
- [ISO/IEC 10536](#) Identification Cards - Contactless integrated circuit(s) card; Part 1, Physical characteristics, September 1992; Part 2, Dimensions and location of coupling areas, December 1995; Part 3, Electronic signals and reset procedures, December 1996.

#### **CS.3.1.3 Emerging Standards**

##### **CS.3.1.3.1 Smart-Card Technology Standards**

The standards for both contact and contactless Smart Cards are still evolving and being specified. ISO 7816 series is for contact Smart Cards while ISO 10536, 14443, and 15693 specify the standards for various types of contactless smart cards. The following Smart-Card standards are emerging:

- [ISO/IEC 7816](#) Identification Cards - Integrated circuit(s) card with contacts; Part 8, Security architecture and related interindustry commands, November 1998; Part 9, Enhanced interindustry commands, October 1999; Part 10, Electronic signals and answer to reset for synchronous cards, April 1998.

- [ISO/IEC 10536-4](#) Identification Cards - Contactless integrated circuit(s) card; Part 4, Answer to reset and transmission protocols, September 1995.
- [ISO/IEC 14443](#) Identification Cards - Contactless integrated circuit(s) cards - Proximity integrated circuit(s) cards; Part 1 Physical characteristics, July 1998; Part 2, Radio Frequency Interface, October 1999; Part 3, Initialization and anti-collision, October 1999; Part 4 Transmission protocols, October 1999.
- [ISO/IEC 15693](#) Identification Cards - Contactless integrated circuit(s) - Vicinity cards; Part 1, Physical characteristics, October 1999; Part 2, Air interface and initialization, October 1999; Part 3, Protocols, October 1999; Part 4, Registration of applications and issuers, October 1996.

Page intentionally left blank.

# Automatic Test Systems Subdomain Annex for the Combat Support Domain

## CS.ATS.1 Subdomain Overview

### CS.ATS.1.1 Purpose

The Automatic Test Systems (ATS) Subdomain Annex identifies additions to the Combat Support Domain Annex core elements (i.e., standards, interfaces, and service areas) listed in Section 2 of this document. These additions are common to the majority of ATS and support the functional requirements of these systems.

The purpose of the ATS Subdomain Annex is to:

- ☐ Provide the foundation for a seamless flow of information and interoperability among all Department of Defense (DoD) ATS.
- ☐ Mandate standards and guidelines for system development and acquisition that will significantly reduce cost, development time, and fielding time for improved systems, while minimizing the impact on program performance wherever possible.
- ☐ Improve the test acquisition process by creating an ATS framework that can meet functional and technical needs, promote automation in software development, re-hostability, and portability of Test Program Sets (TPSs).
- ☐ Communicate to industry DoD's intention to use open-systems products and implementations. DoD will buy commercial products and systems that use open standards to obtain the most value for limited procurement dollars.

### CS.ATS.1.2 Background

From 1980 to 1992, DoD's investment in depot and factory ATS exceeded \$35 billion with an additional \$15 billion for associated support. Often, application-specific test capability was procured by weapon systems acquisition offices with little coordination among DoD offices. This resulted in a proliferation of different custom equipment types with unique interfaces that made DoD appear to be a variety of separate customers. To address this problem, DoD enacted policy changes requiring that "*Automatic Test System capabilities be defined through critical hardware and software elements.*" In response, the joint service Automatic Test Systems (ATS) Research and Development (R&D) Integrated Product Team (IPT), (ARI) has worked toward the definition of an ATS architecture based on open-system principles. A summation of the ARI's work is presented in this subdomain annex. The ATS Subdomain Annex will aid in satisfying the requirements of DoD Regulation 5000.2-R to migrate DoD-designated tester families toward a common architecture.

The policy changes listed below require DoD offices to take a unified corporate approach to acquisition of ATS.

- ☐ DoD Regulation 5000.2-R, Mandatory Procedures for Major Defense Acquisition Programs and Major Automated Information System Acquisition Programs, paragraph 4.3.3.4, March 15, 1996, brings a cost-effective approach to the acquisition of ATS. This policy requires hardware and software needs for depot- and intermediate-level

applications to be met using DoD-designated families and commercial equipment with defined interfaces and requires the management of ATS as a separate commodity through a DoD Executive Agent Office (EAO). The policy also requires that the introduction of unique types of ATS into DoD field, depot, and manufacturing operations be minimized. Change 3 of DoD 5000.2-R, dated March 23, 1998, requires that the ATS selection “shall be based on a cost and benefit analysis that ensures that the ATS chosen is the most beneficial to the DoD over the system life cycle.”

- ☐ Secretary of Defense Memorandum on Specifications and Standards - 29 June 1994 directs that DoD procurements be made first by performance definition, second by commercial standards, and finally (and only with waiver) by military standards.

The use of open standards in ATS has been projected to provide the following five benefits.<sup>1</sup>

- ☐ Improve the test acquisition process by creating an ATS framework that can meet functional and technological needs, and promote automation in software development, re-hostability, and portability of Test Program Sets (TPSs).
- ☐ Decrease the use of custom hardware from approximately 70 percent today to 30 percent.
- ☐ Reduce engineering costs 70 percent.
- ☐ Reduce TPS integration time and cost 50 to 75 percent.
- ☐ Provide an iterative improvement in the quality of test by the reuse and refinement of libraries.


### **CS.ATS.1.3 Subdomain Description**

An ATS has three major components: Automated Test Equipment (ATE), TPSs, and the Test Environment. The ATE consists of test and measurement instruments, a host computer, switching, communication buses, a receiver, and system software. The host computer controls the test and measurement equipment and execution of the TPS. The system software controls the test station and allows TPSs to be developed and executed. Examples of system software include operating systems, compilers, and test executives. The TPS consists of software to diagnose Units Under Test (UUT), a hardware fixture that connects the UUT to the ATE, and documentation that instructs the station operator on how to load and execute the TPS. The Test Environment includes a description of the ATS Architecture, programming and test specification languages, compilers, development tools, a standard format for describing UUT design requirements, and test strategy information that allows TPS software to be produced at a lower cost.

---

1. Institute for Defense Analysis (IDA) *Investment Strategy Study*, 1993.

A high-level overview of a typical ATS is shown in [Figure CS.ATS-1](#). This architecture is expanded into more detail in the hardware and software technical reference models introduced in Section CS.ATS.1.5. The interfaces in the technical reference models are discussed in more detail in Sections CS.ATS.2 and CS.ATS.3.

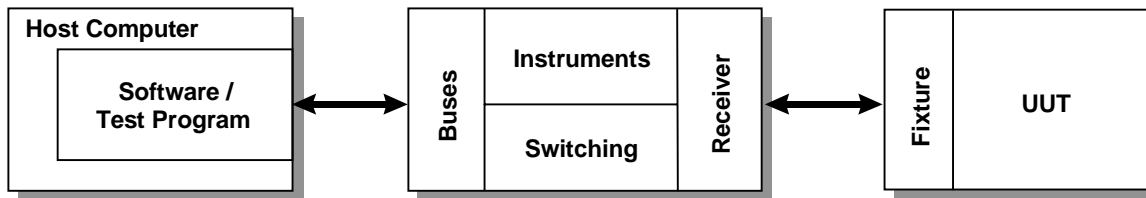

**Figure CS.ATS-1: Generic ATS Architecture**

#### **CS.ATS.1.4 Scope and Applicability**

The following factors guided the selection of interfaces in the ATS Subdomain Annex.

- ☐ **Hardware and Software** – Hardware and software associated with the supported test domains and software interfaces required to build ATS were included.
- ☐ **Signal Types** – The scope was limited to digital, analog, Radio Frequency (RF), and microwave electrical signals.
- ☐ **Testing Levels** – The interface standards in the ATS Subdomain Annex are mandated for factory, depot, intermediate, and operational/organizational levels of ATS.

The standards selected for inclusion in the ATS Subdomain Annex were found to be key for the generic, open-system architecture of ATS. The standards are based on commercial, open-system technology, have implementations available, and are strongly supported in the commercial marketplace. Standards in the ATS Subdomain Annex meet the following criteria:

- ☐ **Availability** – The standards are currently available.
- ☐ **Commercial Acceptance** – The standards are used by several different commercial concerns.
- ☐ **Efficacy** – The standards increase the interoperability of ATS hardware and software.
- ☐ **Openness** – Mandated standards are all open, commercial standards.

Standards that are commercially supported in the marketplace with validated implementations available in multiple vendors' mainstream commercial products took precedence over other standards. Publicly held standards were generally preferred. International or national industry standards were preferred over military or other Government standards. Many standards have optional parts or parameters that can affect interoperability. In some cases, a standard may be further defined by a standards profile, which requires certain options to be present to ensure proper operation and interoperability.

Previously, each of the Services had established its own sets of standards (e.g., technical architectures). The ATS Subdomain Annex is envisioned as a single, generic, open-system architecture in DoD ATS. The ATS Subdomain Annex shall be used by anyone involved in the management, development, or acquisition of new or improved ATS within DoD. System developers shall use the ATS Subdomain Annex to ensure that new and upgraded ATS, and the interfaces to such systems, meet interoperability requirements. System integrators shall use this document to facilitate the integration of existing and new systems. Operational requirements developers shall be cognizant of the ATS Subdomain Annex in developing requirements and functional descriptions. ATS is a subdomain of the Combat Support domain of the JTA.

## CS.ATS.1.5 Technical Reference Model

### CS.ATS.1.5.1 Hardware

The hardware interfaces in a typical ATS are shown in [Figure CS.ATS-2](#). Interfaces are only mandated if they affect the interoperability or life-cycle costs of DoD ATS, and are supported by widely accepted commercial standards. Interfaces are not mandated if they are not supported by commercial standards or do not affect the interoperability or life-cycle costs of DoD ATS. Interfaces that are not supported by commercial standards are included as emerging standards if they affect the interoperability or life-cycle costs of DoD ATS.

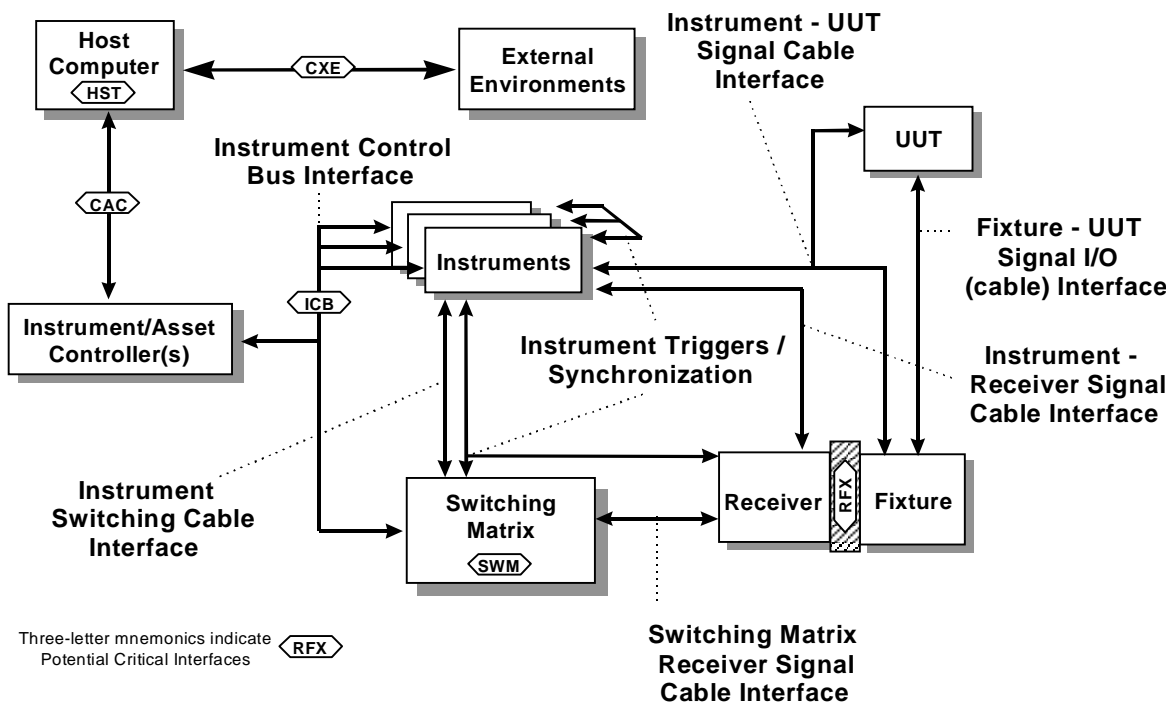


Figure CS.ATS-2: Hardware Interfaces

The interfaces shown in Figure CS.ATS-2 are listed alphabetically by mnemonic below:

- **Computer Asset Controller Interface (CAC)** describes the communication paths between the host computer and instrument controllers in a distributed system.



- **Computer to External Environments (CXE)** describes the communication methods between a host ATS and remote systems.
- **Host Computer Interface (HST)** describes the processing architecture of the primary control computer in which the TPS is executed and through which the operator interfaces.
- **Instrument Control Bus (ICB)** interface describes the connection between the host computer or instrument controller and the test and measurement instruments in the ATS.
- **Receiver/Fixture Interface (RFX)** describes the interface between the receiver (part of the ATS) and the Fixture (part of the TPS). The RFX establishes an electrical and mechanical connection between the UUT and the ATS.
- **Switching Matrix Interface (SWM)** describes switch paths that connect ATS test and measurement instruments to pins on the RFX.

#### CS.ATS.1.5.2 Software

The software interfaces are introduced using two reference models: a runtime view and a TPS development view. The interfaces applicable to the runtime view are shown in [Figure CS.ATS-3](#). These interfaces describe information-processing flows as the TPS diagnoses a UUT. The TPS development interfaces are shown in [Figure CS.ATS-4](#).

In these diagrams, Host Computer refers to computers that run the ATS and instrument asset controllers and computers that are subordinate to the host. The runtime diagram presents a generic template for the functional organization of software processes. Subsets of this structure will appear on individual processors in a distributed-processing architecture. On any processor, if components shown on this diagram are present and interact, their interactions must comply with the interface requirements identified in this document.

The interfaces depicted in the runtime view of [Figure CS.ATS-3](#) are listed alphabetically by mnemonic below:

- **Diagnostic Processing (DIA)** is the interface protocol linking execution of a test with software diagnostic processes that analyze the significance of the test results and suggest conclusions or additional actions required.
- **Instrument Driver API (DRV)** is the API through which instrument drivers accept commands from, and return results to, Generic Instrument Classes.
- **Framework (FRM)** is a collection of system requirements, software protocols, and business rules (e.g., software installation) affecting the operation of test software with its host computer and operating system (OS).
- **Instrument Command Language (ICL)** is the language in which instrument commands and results are expressed as they enter or leave the instrument.
- **Instrument Communication Manager (ICM)** is the interface between the instrument drivers and the Communication Manager that supports communication with

instruments independent of the bus or other protocol used (e.g., VXI, IEEE-488.2, RS-232).

- **Multimedia Formats (MMF)** denotes the formats used to convey text, audio, video, and three-dimensional physical model information from multimedia authoring tools to the Application Development Environment (ADE), Application Execution Environment, and host framework.
- **Network Protocol (NET)** is the protocol used to communicate with external environments, possibly over a Local or Wide Area Network. The software protocol used on the CXE hardware interface is represented by the NET software interface.
- **Resource Adapter Interface (RAI)** is the interface through which instrument drivers accept commands from, and return results to, test procedures or runtime services serving the Test Program.
- **Runtime Services (RTS)** denotes the services needed by a TPS not handled by the services supplied by the DRV, FRM, GIC, and NET, (e.g., error reporting, data logging).
- **Test Program to Operating System (TOS)** denotes system calls to the host OS made directly from the TPS.


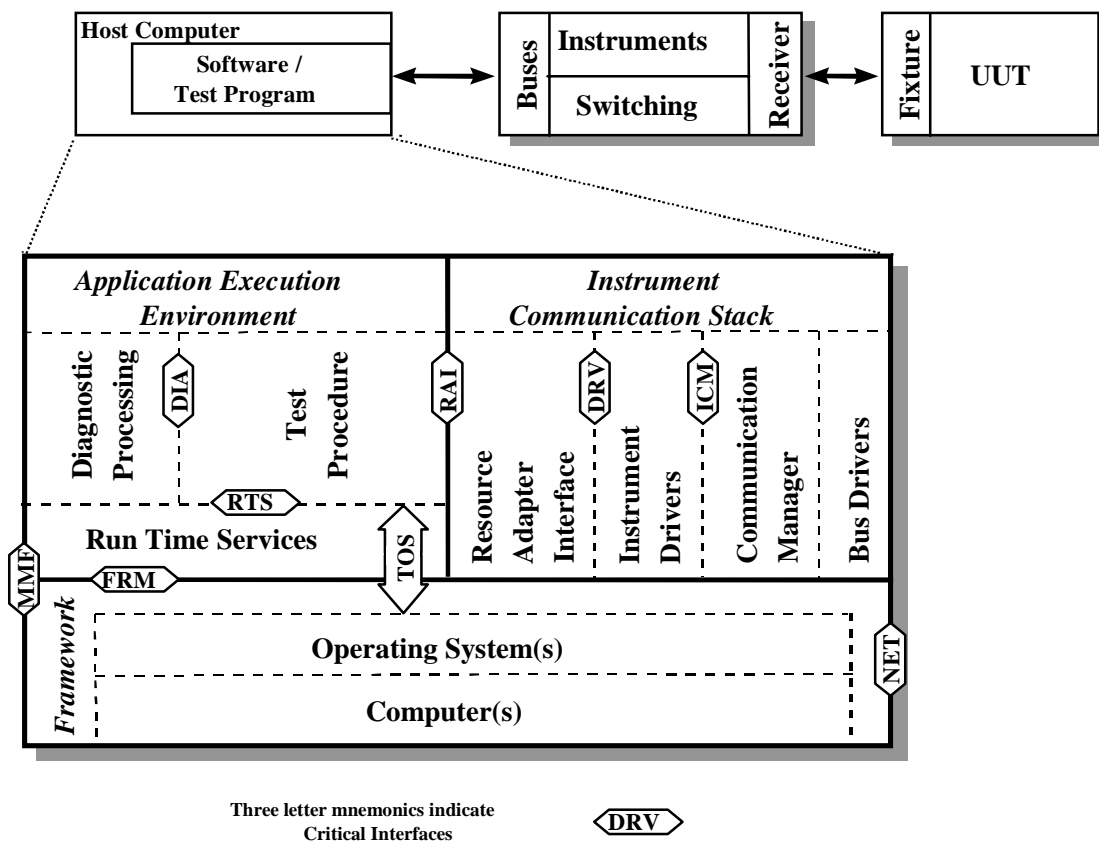


Figure CS.ATS-3: TPS Runtime Interfaces

The interfaces depicted in the development view of [Figure CS.ATS-4](#) are listed alphabetically by mnemonic below:

- **Application Development Environments (ADE)** is the interface by which the test engineer creates and maintains a TPS, whether captured in the form of a text or graphical language.
- **Adapter Function and Parametric Data (AFP)** is the information and formats used to define to the ADE the capabilities of the test fixture, how the capabilities are accessed, and the associated performance parameters.
- **Instrument Function and Parametric Data (IFP)** is the information and formats used to define to the ADE the load, sense, and drive capabilities of the instruments; how these capabilities are accessed; and the associated performance parameters.
- **Switch Function and Parametric Data (SFP)** is the information and formats used to define to the ADE the interconnect capabilities of the switch matrix, how these capabilities are accessed, and associated performance parameters.
- **Test Program Documentation (TPD)** is a plain-language representation of information about the TPS for use by the TPS maintainer.
- **UUT Test Requirements (UTR)** is the information and formats used to define to the ADE the load, sense, and drive capabilities that must be applied to the UUT to test it, including the minimum performance required for a successful test.

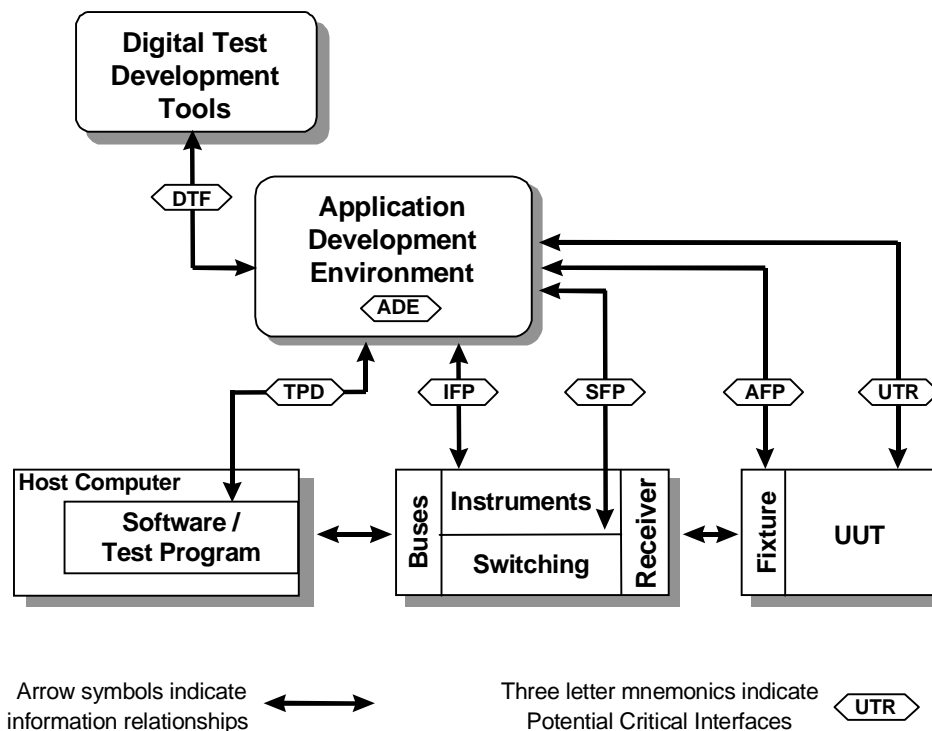

**Figure CS.ATS-4: TPS Development Interfaces**

## **CS.ATS.1.6 Subdomain Annex Organization**

The ATS Subdomain Annex consists of three main sections. Section 1 contains the overview, Section 2 contains the additions to the JTA Core service areas for ATS, and Section 3 contains the domain-specific service areas for ATS. A list of sources is provided in Appendix B. In cases where the ATS Subdomain Annex does not address an interface to be used in an ATS, the JTA takes precedence. In cases where the JTA and ATS Subdomain Annex specify different standards for the same interface, the ATS Subdomain Annex takes precedence.

## **CS.ATS.1.7 Configuration Management**

Configuration management of the ATS Subdomain Annex will be the responsibility of the joint service ARI. All changes will be approved by the ATS EAO with coordination from the ATS Management Board (AMB).

## **CS.ATS.2 Additions to the JTA Core**

### **CS.ATS.2.1 Introduction**

The standards in the ATS Subdomain Annex apply in addition to the standards in the Combat Support domain and the JTA Core.

### **CS.ATS.2.2 Information-Processing Standards**


#### **CS.ATS.2.2.1 Introduction**

#### **CS.ATS.2.2.2 Mandated Standards**

##### **CS.ATS.2.2.2.1 Data Interchange Services**

##### **CS.ATS.2.2.2.1.1 Instrument Driver API Standards**

The DRV is the interface between the generic instrument class serving the test procedure and the instrument driver. The calls made available at this interface include calls oriented to software housekeeping, such as initializing the driver itself; and calls that cause the instrument to perform a function, such as arm and measure commands. The service requests crossing this interface are communications between generic ATS assets (e.g., digital multimeter) and specific ATS assets (e.g., vendor XYZ model 123 digital multimeter). The instruments are ATS assets, but the calls to the driver are either direct or close-to-direct consequences of action requests in the Test Procedure, which is a TPS asset. Some instrument functions are available from a variety of instruments. However, the driver calls to access these functions vary from instrument to instrument. This interferes with TPS portability. Historically, cross-platform incompatibilities—in the way drivers for the same instrument implement the same function—have been a recurring ATS integration problem. In common commercial practice, the driver is acquired with the instrument from the instrument's original equipment manufacturer. The DRV API interface allows software developed by different organizations to work together. The following standard is mandated in this version of the JTA.

- [VXI plug&play](#) Systems Alliance Instrument Driver Functional Body Specification VPP-3.2, Revision 4.0, 2 February 1996. 

### **CS.ATS.2.2.2.1.2 Digital Test Data Formats**

Digital Test Data Formats (DTFs) describe the sequence of logic levels necessary to test a digital UUT. Digital test data is generally divided into four parts: patterns, timing, levels, and circuit models and component models used for the fault dictionary. In addition, certain diagnostic data may exist that is closely associated with the digital test data. This interface is intended to be used for capturing the output of digital automatic test pattern generators. A standard for describing DTF, known as LSRTAP, has become a de facto industry standard. The following standard is mandated in this version of the JTA:

- [IEEE 1445-1998](#), Standard for Digital Test Interchange Format (DTIF).

### **CS.ATS.2.2.3 Emerging Standards**

#### **CS.ATS.2.2.3.1 Data Interchange Services**

##### **CS.ATS.2.2.3.1.1 Resource Adapter Interface**

The Resource Adapter Interface (RAI) is the interface between the generic instrument classes serving the test procedure or runtime services and the instrument driver. The service requests crossing this interface are communications between the TPS requirements (e.g., measure voltage of a sine wave) and generic ATS assets (e.g., digital multimeters, waveform generators, and power supplies). DoD is working to steer IEEE 1226, the VXIplug&play Systems Alliance, and the Interchangeable Virtual Instruments Foundation, toward a common solution.

The following standards are emerging:

- [IEEE 1226.3-1998 ABBET](#) Resource Management Services.
- [IEEE 1226.11-1998](#) ABBET Test Resource Information Model.
- [VXIplug&play Systems Alliance VPP-3.1](#): Instrument Drivers Architecture and Design Specification Revision 4.1 December 4, 1998.
- [VXIplug&play Systems Alliance VPP-3.2](#): Instrument Driver Functional Body Specification Revision 5.0 December 4, 1998.
- [VXIplug&play Systems Alliance VPP-3.3](#): Instrument Driver Interactive Developer Interface Specification Revision 3.0 December 4, 1998.
- [VXIplug&play Systems Alliance VPP-3.4](#): Instrument Driver Programmatic Developer Interface Specification Revision 2.2 December 4, 1998.

Interchangeable Virtual Instruments (IVI) Foundation Standards:

- [IVI-4 Aug 98](#): IviScope Class.
- [IVI-5 Aug 98](#): IviDmm - Digital Multimeter Class.
- [IVI-6 Aug 98](#): IviFGen - Function Generator/Arbitrary Waveform Generator Class.
- [IVI-7 Aug 98](#): IviPower - Power Supply Class.
- [IVI-8 Aug 98](#): IviSwitch - Switch Matrix/Multiplexor Class.

### CS.ATS.2.2.3.1.2 Diagnostic-Processing Standards

The diagnostic-processing interface resides between the test procedure or runtime services supporting the TPS and a diagnostic reasoner, diagnostic controller, or other diagnostic process. Diagnostic tools are most frequently encountered in one of three forms: expert systems, decision-tree systems, and model-based reasoners. Other diagnostic tools are expert systems known as the Fault Isolation System and the Expert Missile Maintenance Advisor; decision-tree systems including Weapon System Testability Analyzer, System Testability and Maintenance Program, System Testability Analysis Tool, and AUTOTEST; and model-based reasoners including Intelligent-Computer-Aided Test, Portable Interactive Troubleshooter, Artificial-Intelligence Test, and Adaptive Diagnostic System.

Standardization in this area would allow tools to be written that can translate test strategy information to various test programming languages. Additionally, the tools would be interchangeable since one could use any tool to obtain the same output source code.

The following standards are emerging:

- [IEEE 1232-1998](#), Artificial Intelligence Exchange and Service Tie to All Test Environments (AI-ESTATE) Overview and Architecture.
- [IEEE 1232.1-1997](#), Trial Use Standard for AI-ESTATE Data and Knowledge Specification.
- [IEEE 1232.2-1998](#), Trial Use Standard for AI-ESTATE Service Specification.

### CS.ATS.2.2.3.1.3 Adapter Function and Parametric Data Standards

This information defines the electrical behavior of the fixture that connects the UUT to the ATS. Functional descriptions are included to allow for the case of active fixtures. Describing the function of the fixture begins with a statement of the wirelist association between receiver terminals and UUT terminals. Performance parameters are required to complete the characterization of the path between the instrument and the UUT, so as to be able to construct a model of the effective instrument applied to the UUT signals (characterized with reference to the UUT interface).

The following standard is emerging:

- [IEEE P1226.11-1998](#).ABBET Test Resource Information Model.

### CS.ATS.2.2.3.1.4 ATS Instrument Function and Parametric Data Standards

This interface defines the capabilities of the ATS stimulus and measurement devices, how they are controlled, and how they are connected within the ATS. It includes:

- ☐ **Instrument Capabilities** – This defines what the instrument can measure, stimulate, and/or load the circuits to which it is attached. It includes identifying the function, such as measure volts, and quantitative performance characteristics including the range over which a voltage can be measured and the resolution and accuracy (as a function of choice of range) to be expected from the measured value.
- ☐ **Instrument Control** – The command vocabulary by which the instrument can be controlled to apply these behaviors.

- **Instrument Limits** – Limits are associated both with the safety of the instrument and surety of resolution performance. For example: “*Do not expose this instrument to more than 1 KV across the sensing terminals*” or “*Accuracy of voltage stimulus guaranteed with the instrument sourcing up to 100 mA.*”

The following standard is emerging:

- [IEEE P1226.11-1998](#), ABBET Test Resource Information Model.

#### **CS.ATS.2.2.3.1.5 ATS Switching Function and Parametric Data Standards**

This interface defines the capabilities of the ATS switching devices, how they are controlled, and how they are interconnected with other ATS devices. It includes the possible states of the separately settable switch elements, the connectivity through the switch in each such state, and electrical performance characteristics of the paths connected as a result of the switch state. The parametric information includes as-installed electrical path performance from the point to which the instrument characteristics are referenced out to the receiver/fixture disconnect surface. The following standard is emerging:

- [IEEE P1226.11-1998](#), ABBET Test Resource Information Model.

#### **CS.ATS.2.2.3.1.6 UUT Test Requirements Data Standards**

High re-host costs in the past have been associated with the failure to record or preserve the signal-oriented action capabilities *as required* as opposed to *as used*. This problem is most visible in the allocation phase of TPS development. When a TPS is transported or re-hosted, the resources requested by the TPS must be allocated to assets in the target ATS. This task would be simplified if UUT test requirements in the form of load specifications, measurement requirements, and stimuli requirements that must appear at the UUT interface were available.

The following standard is emerging:

- [IEEE Computer Society Test Technology Technical Committee](#) Test Requirements Model (TeRM).

### **CS.ATS.2.3 Information-Transfer Standards**

#### **CS.ATS.2.3.1 Introduction**

#### **CS.ATS.2.3.2 Mandated Standards**

##### **CS.ATS.2.3.2.1 Data Networking Standards**

In an ATS that has either internal (controller to controller) or external (controller to external host) networking, standardizing on a networking protocol should reduce the amount of time spent re-hosting a TPS between two organizations. This problem becomes more serious if the ADE controlling the ATS has built-in applications that are network objects (either clients, servers, routers, or other). In these instances, porting the ADE between platforms becomes more difficult since it may support different network protocols and different operating environments. Also important is the transfer of test result data for logistics and maintenance engineering purposes, i.e.,



tracking of UUT, failure modes, and test results analysis. Defining a specific protocol as the choice for data communications will significantly reduce the problem. Networking accelerates the distribution of updates for TPSs that are operational on a large number of widely distributed ATSs.

ATS and development systems that are elements of ATS must maintain networking capabilities that conform with current Internet standards. Current Internet standards are identified in the Internet Official Protocol Standards Index as released by the Internet Architecture Board (IAB).

Any hardware that has support for the software protocol standards specified in JTA Section 2.3.2.1.1.2.1.1, Transmission Control Protocol (TCP) and JTA Section 2.3.2.1.1.2.1.3, Internet Protocol (IP) may be used; however, TCP and IP are mandated by the JTA Core document. Unacknowledged, connectionless, datagram transport standards will not be used in ATS.

### **CS.ATS.2.3.2.2 Instrument Communication Manager Standards**

The ICM interface includes bus-specific options for communicating from the instrument driver to a supporting input/output (I/O) library. Until recently, vendors of IEEE-488 and VXI bus hardware provided software drivers for their buses that were different according to the hardware bus protocol or operating system (OS) used. This situation interfered with the plug-and-play capabilities that users thought they were going to get from buying different instruments that all communicated by common hardware protocols. The same functions of the same instruments were not accessed through software in the same way across buses and host platforms. Different manufacturers of IEEE-488 cards had proprietary and unique software calls. Furthermore, Hewlett-Packard and National Instruments—the two leading vendors of VXI Slot 0 cards and embedded controllers—used different I/O calls to access instruments. This impeded the transporting of instrument drivers, ADEs, and test programs from one set of hardware to another. Without a standard ICM interface, vendors cannot provide interoperable or portable instrument drivers because different vendors would use different I/O drivers at the very lowest layer of the software. This forces instrument drivers to be tailored to specific I/O calls for each test station and lowers the likelihood that instrument drivers will be commercially available for each configuration. In addition, standard I/O software allows one to place parameters such as bus addresses and instrument addresses in the instrument driver instead of the test program.

A standard ICM interface enables higher-level software to be interoperable and portable between vendors and across different platforms. This improves the interoperability of test software and the ability to re-host test software from one test system to another. The following specification is mandated:

- [VXI plug&play \(VPP\) Systems Alliance Virtual Instrument Standard Architecture \(VISA\) Library, VPP-4.3, 22 January 1997.](#) 

### **CS.ATS.2.3.3 Emerging Standards**

#### **CS.ATS.2.3.3.1 Maintenance Test Data and Services (MTD)**

Maintenance Test Data and Services (MTD) provide a standard representation of maintenance data in the test environment. MTD enhances runtime execution of the test program by capturing and using information developed during maintenance activities. This directly interfaces with the DIA interface by providing information that can supplement diagnostic capabilities.



The following standards are emerging:

- [IEEE P1522](#) IEEE Testability Standard.
- [IEEE 1545-1999](#) Trial Use Standard for Parametric Data Logging and Format.

#### **CS.ATS.2.3.3.2 Product Design Data (PDD)**

Product Design Data (PDD) originates in the design process and is needed for the development and sustainment of test and diagnostics. PDD includes information about structures that are present in the product solely or principally to support test and diagnostics and facilitates the transfer of information from CAD workstations to the TPS development, reducing errors and development time. PDD supports the back-annotation of test and maintenance information into the design environment, reducing sustainment costs.

The following standard is emerging:

- [ANSI/EIA 682:1996](#), EDIF Electronic Design Interchange Format, Version 399, Reference Manual and Information Model.

#### **CS.ATS.2.3.3.3 Built-In Test Data (BTD)**

Built-in Test Data (BTD) provides a standard representation of BIT data into the test environment. BTD will improve runtime execution of test programs by providing guidance to the diagnostic services within an ATS. During TPS development, candidate BIT requirements can be evaluated by contrasting the impact on design and production against maintenance and diagnostic test. Cost-effective BIT requirements can then be imposed as design constraints. New initiatives in the area of BIT architecture and information exchange mechanisms are also being evaluated.

The following standards are emerging:

- [IEEE 1149.1-1990](#) IEEE Standard Test Access Port and Boundary-Scan Architecture.
- [IEEE P1149.4-1999](#) Mixed-Signal Test Bus.
- [IEEE 1149.5-1995](#) IEEE Standard for Module Test and Maintenance Bus (MTM-Bus) Protocol.
- [IEEE P1226.13-1998](#) ABBET Parametric Data Log Format.

#### **CS.ATS.2.3.3.4 Resource Management Services (RMSs)**

Resource Management Services (RMSs) include services needed to perform virtual to real resource mapping, virtual resource management, test equipment configuration management, and real resource management. They provide a transportable means to bridge the gap between test programs and ATE through standardizing software interfaces to ATE test resources for the purpose of test asset management and test resource control. This allows a TPS to be developed that is totally free of instrument-specific test actions. The RMS ensures that if the low-level drivers and instrument buses are compatible, instrument resources can be interchanged from a software viewpoint. In addition, the RMS promotes TPS re-host as long as compatible resource modes are available on both ATE systems, even if the specifications of those resources are different.

The following standard is emerging:

- [IEEE 1226.3-1998](#) Software Interfaces for Resource Management Services.

## **CS.ATS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

### **CS.ATS.2.4.1 Introduction**

#### **CS.ATS.2.4.2 Mandated Standards**

There are currently no mandated standards applicable to the ATS Subdomain with respect to Information-Modeling, Metadata, and Information-Exchange Standards as specified in Section 2.4 of the JTA.

#### **CS.ATS.2.4.3 Emerging Standards**

There are currently no emerging standards identified in this section of the ATS Subdomain Annex.

## **CS.ATS.2.5 Human-Computer Interface Standards**

### **CS.ATS.2.5.1 Introduction**

#### **CS.ATS.2.5.2 Mandated Standards**

There are currently no mandated standards applicable to the ATS Subdomain with respect to Human-Computer Interface Standards as specified in [Section 2.5](#) of the JTA.

#### **CS.ATS.2.5.3 Emerging Standards**

There are currently no emerging standards identified in this section of the ATS Subdomain Annex.

## **CS.ATS.2.6 Information-Security Standards**

### **CS.ATS.2.6.1 Introduction**

#### **CS.ATS.2.6.2 Mandated Standards**

There are currently no mandated standards applicable to ATS with respect to Information-Security as specified in [Section 2.6](#) of the JTA.

#### **CS.ATS.2.6.3 Emerging Standards**

There are currently no emerging standards identified in this section of the ATS Subdomain Annex.

## **CS.ATS.3 Subdomain-Specific Service Areas**

### **CS.ATS.3.1 Software-Engineering Services**

There are currently no mandated or emerging standards identified in this section.

### **CS.ATS.3.2 Data/Information Services**

#### **CS.ATS.3.2.1 Introduction**

#### **CS.ATS.3.2.2 Mandated Standards**

This version of the ATS Subdomain Annex does not contain any domain-specific mandated standards in the area of data/information services.

### **CS.ATS.3.2.3 Emerging Standards**

#### **CS.ATS.3.2.3.1 Runtime Services**

The RTS interface encompasses data logging services, operator I/O, timing and tasking control, and resource allocation performed at execution. This interface defines the means by which runtime services are called during TPS execution. Although standards do not exist, various implementations do. Standardization in this area would allow the use of various test executives with any language that they support. Proprietary implementations of the interface between the TPS and Test Executive exist. However, the means by which various runtime services are called depend upon the implementation. Direct transportability of a TPS across platforms will be compromised if the TPS requires runtime services that are not supported on both systems or if the calling method differs between the host and target platforms.

The following standard is emerging:

- [IEEE P1226.10](#), ABBET Run Time Services.

### **CS.ATS.3.3 Platform/Environment Services**

#### **CS.ATS.3.3.1 Introduction**

#### **CS.ATS.3.3.2 Mandated Standards**

##### **CS.ATS.3.3.2.1 Computer to External Environments**

The Computer to External Environments (CXE) interface describes the communication methods between a host ATS and remote systems. This includes paths between the target ATS host computer and other ATS systems as well as TPS development stations that are part of the Test Environment. This interface supports transporting TPS software and supporting documentation between organizations. Examples of this interface include Ethernet, RS-232, and IEEE-488.

Any hardware that has support for the software protocol standards specified in JTA [Section 2.3.2.1.1.2.1.1](#) and [Section 2.3.2.1.1.2.1.3](#), Transmission Control Protocol (TCP) over Internet Protocol (IP), may be used.

##### **CS.ATS.3.3.2.2 System Framework Standards**

System frameworks provide a common interface for developers of software modules, ensuring that they are portable to other computers that conform to the specified framework. By defining system frameworks, suppliers can focus on developing programming tools and instrument drivers that can be used with any ADE that is compliant with the framework. System frameworks contain, but are not limited to, the following components:

- ☐ Compatible ADEs.
- ☐ Instrument Drivers.
- ☐ Operating System.
- ☐ Required Documentation and Installation Support.
- ☐ Requirements for the Control Computer Hardware.
- ☐ Soft Front Panel.

- ☐ VISA Interface and I/O Software.
- ☐ VXI Instruments, VXI slot0, System Controller, VXI Mainframe.

A system designed using a VXI-plug&play system framework ensures that the ADE, DRV, GIC, ICM, and other FRM components are compatible and interoperable with each other. Following the system framework requirements also ensures that all necessary system components have been included, resulting in a complete and operational system. System frameworks increase the likelihood that ADEs will be available on multiple platforms, greatly enhancing the ability to move test software between platforms. While this does not ensure total portability of TPSs, it does eliminate the need to translate or rewrite the source code when it is ported. The following standard is mandated:

- [VXI plug&play System Alliance System Frameworks Specification, VPP-2, Revision 4.0, 29 January 1996.](#) 

### **CS.ATS.3.3.3 Emerging Standards**

#### **CS.ATS.3.3.3.1 Receiver/Fixture Interface**

The Receiver/Fixture (RFX) and generic pin map interfaces represent a central element of the ATS through which the majority of stimulus and measurement reach the UUT. Standardization of the RFX and pin map allows the same fixture to be used on multiple ATSs. A standard pin map restricts the types of signals present at different positions on the receiver. Standardization of this interface increases the interoperability of test program sets, resulting in lower re-host costs.

The following standard is emerging:

- [IEEE P1505](#) Receiver Fixture Interface (RFI) Standard.

#### **CS.ATS.3.3.3.2 Switching Matrix Interface**

The Switching Matrix (SWM) interface and ATS receiver/fixture pin map represent a central element of the ATS for connecting ATS instrumentation to the UUT through a switch matrix. The SWM allows a variety of instruments to be connected to multifunction terminals identified by a standard receiver/fixture pin map. The combination of standardizing the SWM interface and a common receiver/fixture pin map gives the ATS the capability to accommodate any fixture that conforms to the pin map. Standardization of the SWM interface and receiver/fixture pin map increases interoperability by ensuring that ATS instruments needed to test a UUT can be switched to pins required by the fixture.

The following standard is emerging:

- [IEEE P1552-1999](#) Standard Architecture for Test Systems (SATS).

#### **CS.ATS.3.3.4 Other Interfaces**

The interfaces described in this section are provided for completeness of the ATS Subdomain Annex and to make readers aware that these interfaces have been addressed. Standards for these interfaces are not mandated, because they were not found to be key for the generic open-system architecture for ATS.

**CS.ATS.3.3.4.1 Computer Asset Controller Interface**

The Computer Asset Controller (CAC) interface describes the communication paths between the host computer and instrument controllers in a distributed system. These interfaces may be internal or external to the host computer. Examples of internal interfaces are Industry Standard Architecture (ISA) and Peripheral Component Interface (PCI). Examples of external interfaces are IEEE-488, RS-232, Ethernet, Multisystem Extension Interface, and Modular System Interface Bus.

**CS.ATS.3.3.4.2 Host Computer Interface**

The Host Computer (HST) interface describes the processing architecture of the primary control computer where the TPS is executed and through which the operator interfaces. Portions of the HST interface affect the interoperability of ATS. These requirements are included in the Frameworks software interface.

**CS.ATS.3.3.4.3 Instrument Control Bus Interface**

The Instrument Control Bus (ICB) interface describes the connection between the host computer or instrument controller and the test and measurement instruments in the ATS. Examples of these interfaces are IEEE-488, VME, and VME Extensions for Instrumentation (VXI).

**CS.ATS.3.3.4.4 Instrument Command Language**

The Instrument Command Language (ICL) interface describes how instrument commands and results are expressed as they enter or leave test and measurement instruments. The requirements for this interface are satisfied by the DRV and GIC interfaces.

**CS.ATS.3.3.4.5 Application Development Environments**

The Application Development Environment (ADE) interface describes how the test engineer creates and maintains a TPS, whether it is captured in the form of a text or graphical language. This interface was not mandated, because the requirements for the ADE are restricted by the FRM interface.

Page intentionally left blank.

# **Defense Transportation System Subdomain Annex for the Combat Support Domain**

## **CS.DTS.1 Subdomain Overview**

### **CS.DTS.1.1 Purpose**

The Defense Transportation System (DTS) Subdomain Annex for the Combat Support domain identifies additions to standards, interfaces, and service areas contained in the Department of Defense (DoD) Joint Technical Architecture (JTA) Core and Combat Support Domain Annex that pertain to the DTS. Also included are additional standards central to the interoperability of existing DTS information systems.

### **CS.DTS.1.2 Background**

The Defense Transportation System is an integrated cargo- and personnel-delivery system providing worldwide transportation functions for DoD. It consists of 35 core information systems with interfaces to countless DoD, Federal, state government and law-enforcement agencies nationwide. The DTS must be able to readily exchange information with commercial suppliers. Information concerning the 35 DTS systems can be found in the Defense Transportation System Enterprise Architecture, Version 1.0, 31 August 1999.

### **CS.DTS.1.3 Subdomain Description**

The Transportation System subdomain includes the information systems, information, personnel, and facilities engaged in providing transportation support functions within DoD. These consist of component systems that support discrete functional areas within the DTS subdomain, such as:

- ☐ Modeling and Simulation
- ☐ Financial billing, payment, and tracking
- ☐ Transport of cargo and personnel

### **CS.DTS.1.4 Scope and Applicability**

This subdomain annex applies to all new and existing information systems that make up the Defense Transportation System including upgrades to systems. The standards specified in the JTA Core, the Combat Support Domain Annex, and the Modeling and Simulation Domain Annex, combined with those in this document, comprise the minimum set of standards for the DTS.

### **CS.DTS.1.5 Technical Reference Model**

The Defense Transportation System subdomain uses the technical reference model specified in the JTA.

### **CS.DTS.1.6 Subdomain Annex Organization**

This subdomain annex consists of three main sections. The first section provides an overview, the second identifies additions to the standards in the JTA Core and the Combat Support Domain Annex, and the third identifies DTS subdomain-specific service areas.

## **CS.DTS.2 Additions to JTA Core and Combat Support Domain Annex**

### **CS.DTS.2.1 Introduction**

This section identifies additional standards (mandatory and emerging) unique to the DTS subdomain of the Combat Support domain.

### **CS.DTS.2.2 Information-Processing Standards**

#### **CS.DTS.2.2.1 Introduction**

##### **CS.DTS.2.2.2 Mandated Standards**

###### **CS.DTS.2.2.2.1 Product Data Interchange**

To promote interoperability among military activities and commercial vendors, DoD has adopted standards endorsed by the commercial industry in lieu of developing unique military standards. The current DoD standards include those adopted for the linear bar code (Code 39 approved November 1982) and 2D bar code (PDF-417 approved July 1995).

Bar code standards are used to easily identify packages and products. Linear bar codes such as AIM BC-1 have limited data storage capability, typically a maximum 17 characters. A two-dimensional material-handling standard was developed to allow for greater storage, up to 1,850 characters. 2D bar codes can also sustain considerable damage and still be read. ANSI MH10.8.3M describes the use of two-dimensional symbols (e.g., PDF-417) in conjunction with unit loads and transport packages to convey data between trading partners. Additionally, it specifies the structure, syntax, and coding of dates when using two-dimensional symbols. The following standard is mandated:

- [PDF-417](#) as profiled by ANSI MH10.8.3M-1996, Material Handling – Unit Loads and Transport Packages – Two-Dimensional Symbols.

PDF-417 answers the need to capture, store, and transfer large amounts of data inexpensively. It can exchange complete data files (such as text, numerics, or binary) and encode graphics, fingerprints, shipping manifests, electronic data interchange (EDI) messages, equipment calibration instructions, and much more. It provides a powerful communications capability—without the need to access an external database.

### **CS.DTS.2.3 Information-Transfer Standards**

There are no mandated or emerging standards for the DTS Information-Transfer Standards Section.

### **CS.DTS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

There are no mandated or emerging standards for the DTS Information-Modeling, Metadata, and Information-Exchange Standards Section.

### **CS.DTS.2.5 Human-Computer Interface Standards**

There are no mandated or emerging standards for the DTS Human-Computer Interface Standards Section.



**CS.DTS.2.6 Information-Security Standards****CS.DTS.2.6.1 Introduction****CS.DTS.2.6.2 Mandated Standards**

There are no mandated standard for the DTS Information-Security Section.

**CS.DTS.2.6.3 Emerging Standards****CS.DTS.2.6.3.1 Internetworking Security Standards**

Secure Shell is a protocol used to log into another computer over a network, to execute commands in a remote machine, and to move files from one machine to another. It provides strong authentication and secure communications over insecure channels. The following Secure Shell standards are emerging:

- [Draft-IETF-Secsh-transport-06.txt](#), “SSH Transport Layer Protocol,” T. Ylonen, 1999.
- [Draft-IETF-Secsh-userauth-06.txt](#), “SSH Authentication Protocol,” T. Ylonen, 1999.
- [Draft-IETF-Secsh-connect-06.txt](#), “Connect,” T. Ylonen, 1999.
- [Draft-IETF-Secsh-architecture-04.txt](#), “SSH Protocol Architecture,” T. Ylonen, 1999.
- [Draft-IETF-Secsh-auth-kbdinteract-00.txt](#), “Generic Message Exchange Authentication For SSH,” F. Cusack, 1999.

**CS.DTS.3 Subdomain Specific Service Areas**

There are no subdomain-specific service areas for the Defense Transportation System Subdomain.

Page intentionally left blank.

# **Medical Subdomain Annex for the Combat Support Domain**

## **CS.MED.1 Subdomain Overview**

### **CS.MED.1.1 Purpose**

The Medical (MED) Subdomain Annex identifies additions to the standards, interfaces, and service areas contained in the Department of Defense (DoD) Joint Technical Architecture (JTA) Core and Combat Support Domain Annex that pertains to medical systems. These additions are common to the majority of systems in the Medical subdomain and support the interoperability requirements of those systems.

### **CS.MED.1.2 Background**

The Military Health System (MHS), formerly the Military Health Services System (MHSS), is an integrated healthcare delivery system that provides health care to its beneficiary population largely consisting of active duty personnel and their dependents. It is a global enterprise composed of over 600 military treatment facilities located around the world. The dynamic nature of the MHS, together with the mobility of the beneficiary community, makes it important to ensure that the right information is in the right place at the right time. Furthermore, the MHS requires the ability to exchange this information within DoD, and with other Federal agencies and industry.

The healthcare enterprise is a unique and rapidly evolving industry. Because of this changing environment, it becomes even more critical that the MHS maintain the ability to readily exchange information both within and outside DoD. Within this medical subdomain are established and emerging standards that will be building blocks used in the design, development, and integration of information systems. Standardization is a key enabler within the strategic direction of the MHS information management program to provide support for the business needs of the military healthcare enterprise.

### **CS.MED.1.3 Subdomain Description**

The Medical subdomain includes the information systems, information, personnel, and facilities engaged in providing healthcare and medical support functions within DoD. These consist of component systems that support discrete functional areas within the Medical subdomain, such as:

- ☐ Clinical: provision and management of healthcare services.
- ☐ Logistics: provision of materiel, facilities, equipment, and technology supporting delivery and management of healthcare services.
- ☐ Resources: management of financial and human resources and oversight of managed healthcare.
- ☐ Executive Information/Decision Support: oversight and coordination of enterprise-level operations and planning.
- ☐ Theater: delivery of healthcare services in a contingency situation.
- ☐ Infrastructure: provision and management of shared MHS resources.

These information systems provide the ability to capture, store, transmit, and process medical information at military treatment facilities and other sites around the world. In addition, they interface with commercial medical service providers.

#### **CS.MED.1.4 Scope and Applicability**

This subdomain annex applies to all new and upgraded medical information systems.

The standards specified in the JTA Core and the Combat Support Domain Annex to the JTA, combined with those in this subdomain annex, comprise the minimum set of standards for the MHS.

#### **CS.MED.1.5 Technical Reference Model**

The Medical subdomain uses the technical reference model specified in the Combat Support Domain Annex.

#### **CS.MED.1.6 Subdomain Annex Organization**

This subdomain annex consists of two main sections. The first section provides an overview. The second identifies additions to the standards in the JTA Core and the Combat Support Domain Annex for the Medical subdomain.

### **CS.MED.2 Additions to JTA Core and Combat Support Domain Annex**

#### **CS.MED.2.1 Introduction**

This section identifies additional standards (mandatory and emerging) unique to the Medical subdomain of the Combat Support domain.

#### **CS.MED.2.2 Information Processing Standards**

##### **CS.MED.2.2.1 Introduction**


##### **CS.MED.2.2.2 Mandated Standards**

The following medical-specific standards concerning medical Electronic Data Interchange (EDI), retail pharmacy claims EDI, medical still-imagery data interchange, and medical information exchange have been identified by the medical subdomain in addition to the standards found in [Section 2.2.2](#) of the JTA Core and [CS.2.2.1](#) of the Combat Support Domain Annex.

##### **CS.MED.2.2.2.1 Medical Electronic Data Interchange**

Health Level Seven (HL7) is a standard for EDI in healthcare environments. It standardizes the format and protocol for the exchange of formatted messages containing medical data among medical software applications. It is to be used for the interchange of medical data, specifically patient records and clinical, epidemiological, and regulatory data. The use of the HL7 standards under these specified conditions is in accordance with Federal Information Processing Standard Publication (FIPS PUB) 161-2, EDI. HL7 standards should not be used for healthcare insurance administrative applications (such as for enrollments, claims, and claim payments) or the Government procurement cycle (such as registration of vendors, requests for quotes, purchase order, shipping notice, or payment advice).

The following standard is mandated for medical EDI:

- [Health Level Seven \(HL7\)](#), Version 2.3, Application Protocol for Electronic Exchange in Healthcare Environments, 1995. 

#### **CS.MED.2.2.2.2 Retail Pharmacy Claims Electronic Data Interchange**

The National Council for Prescription Drug Programs (NCPDP) has published a standard for retail pharmacy claims EDI. This standard applies to the transmission of prescription drug and pharmaceutical care benefit/distribution and delivery information including online, real-time drug utilization review, and financial claims data between pharmacies and trading partners.

The following standard is mandated for retail pharmacy claims EDI:

- [NCPDP Telecommunication Standard](#), Version 3.2, 1995.

#### **CS.MED.2.2.2.3 Medical Still-Imagery Data Interchange**


The Digital Imaging and Communications in Medicine (DICOM) standard describes a means for formatting and exchanging images and associated information. It applies to the operation of the interface used to exchange data among medical imaging devices.

The DICOM standard was developed jointly by the medical user community, represented by the American College of Radiology (ACR), and medical equipment manufacturers, represented by the National Electrical Manufacturers Association (NEMA). It has since been adopted by the European Committee for Standardization (CEN) Technical Committee (TC) 251 and the Japanese Industry Association for Radiation Apparatus (JIRA).

The following standard is mandated for medical still-imagery data interchange:

- [Digital Imaging and Communications in Medicine \(DICOM\)](#), Version 3.0, 1993.

#### **CS.MED.2.2.2.4 Medical Information-Exchange Standards**

There are many widely accepted standards for the format and content of medical information to be exchanged among medical-application software entities. In particular, the International Society for Blood Transfusion (ISBT) has developed a standard, ISBT 128, for bar-coding blood donor label information on blood bags. Also, the Universal Product Number (UPN) System, published by the Health Industry Business Communications Council, is a standard for identifying medical and surgical products in the supply chain. Reference the following Health Industry Business Communications Council web site for more information: <http://www.hibcc.org/upndb.htm>. 

The following medical information exchange standards are mandated for the specific purposes indicated:

- [ISBT 128](#), Bar Code Symbology and Application Specification for Labeling of Whole Blood and Blood Components, 1995 (for bar-coding blood donor number label information on blood bags).
- [Universal Product Number \(UPN\) System](#), 1996 (for identifying medical and surgical products in the supply chain).

### **CS.MED.2.2.3 Emerging Standards**

Emerging standards for commercial EDI that are applicable to the Medical subdomain are discussed below. These standards are added to the emerging information-processing standards specified in [Section 2.2.3.1](#) of the JTA Core and [Section CS.2.2.3.1](#) of the Combat Support Domain Annex.

#### **CS.MED.2.2.3.1 Commercial Electronic Data Interchange**

By the end of 2000, final rules implementing the Health Insurance Portability and Accountability Act (HIPAA) will require the use of revised versions of standards for health insurance EDI developed by the ANSI ASC X12 Insurance Subcommittee (X12N).

The following standards are emerging for commercial EDI of some specific transactions for health insurance as published in the Federal Register/Vol. 63, No. 88/Thursday, May 7, 1998/Proposed Rules:

- [X12N 270](#), Version 004010X092, Health Care Eligibility/Benefit Inquiry.
- [X12N 271](#), Version 004010X092, Health Care Eligibility/Benefit Information Response.
- [X12N 276](#), Version 004010X093, Health Care Claim Status Request.
- [X12N 277](#), Version 004010X093, Health Care Claim Status Response.
- [X12N 278](#), Version 004010X094, Health Care Services Request for Review and Response.
- [X12N 820](#), Version 004010X061, Payroll Deducted and Other Group Premium Payment for Insurance Products.
- [X12N 834](#), Version 004010X095, Health Care Benefits and Enrollment and Maintenance.
- [X12N 835](#), Version 004010X091, Health Care Claim Payment/Advice.
- [X12N 837](#), Version 004010X096, Health Care Claim: Institutional.
- [X12N 837](#), Version 004010X097, Health Care Claim: Dental.
- [X12N 837](#), Version 004010X098, Health Care Claim: Professional.

Reference the following Federal Web sites for more information on EDI:  
<<http://www.antd.nist.gov/fededi/>> and <<http://www-edl.itsi.disa.mil/>>.

### **CS.MED.2.3 Information-Transfer Standards**

#### **CS.MED.2.3.1 Introduction**

#### **CS.MED.2.3.2 Mandated Standards**

There are no information transfer standards applicable to the Medical subdomain beyond those in [Section 2.3.2](#) of the JTA Core and [Section CS.2.3](#) of the Combat Support Domain Annex.

#### **CS.MED.2.3.3 Emerging Standards**

In addition to the emerging information-transfer standards in [Section 2.3.3](#) of the JTA Core and [Section CS.2.3](#) of the Combat Support Domain Annex, there are emerging standards for medical device communications that are applicable to the Medical subdomain.

### **CS.MED.2.3.3.1 Medical Device Communications**

Institute for Electrical and Electronics Engineers (IEEE) 1073, Standard for Medical Device Communications, provides standards for a medical information bus (MIB), a mechanism for transferring information between patient-connected devices and computers. The standards are oriented toward the acute-bedside environment and include support for automatic identification of equipment, plug-and-play connectivity, and frequent reconfiguration of devices. The following standard, being developed in multiple parts that cover the seven-layer Open Systems Interconnection (OSI) reference model, is emerging:

- [IEEE 1073](#), Medical Device Communications Overview and Framework, 1996.
- [IEEE 1073.1](#), Medical Device Data Language (MDDL), for OSI Layer 7, 1993.
- [IEEE 1073.2](#), Medical Device Communications Application Profile for OSI Layers 5 through 7, 1995.
- [IEEE 1073.3](#), Medical Device Communications Transport Profile, for OSI Layers 2 through 4, 1995.
- [IEEE 1073.4](#), Medical Device Communications Physical Layer, for OSI Layer 1, 1995.

## **CS.MED.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

### **CS.MED.2.4.1 Introduction**

#### **CS.MED.2.4.2 Mandated Standards**

There are no information modeling, metadata, and information-exchange standards applicable to the Medical subdomain beyond those in [Section 2.4.2](#) of the JTA Core and [Section CS.2.4](#) of the Combat Support Domain Annex.

#### **CS.MED.2.4.3 Emerging Standards**

In addition to the emerging information-modeling, metadata, and information-exchange standards specified in [Section 2.4.3](#) of the JTA Core and [Section CS.2.4](#) of the Combat Support Domain Annex, emerging standards applicable to the Medical subdomain are discussed below.

### **CS.MED.2.4.3.1 Medical Information-Exchange Standards**

An American Society for Testing and Materials (ASTM) Technical Committee E31 (Healthcare Informatics) has developed standards for medical information exchange. Nine ASTM standards are proposed to support various medical functions, including clinical assessment, data record management, results retrieval, scheduling, medical knowledge, medical nomenclature, and medical transactions. The following medical information-exchange standards for supporting various medical functions are emerging:

- [ASTM E1238-97](#), Standard Specification for Transferring Clinical Observations between Independent Computer Systems, 1997.
- [ASTM E1239-94](#), Standard Guide for Description of Reservation/Registration-Admission, Discharge, Transfer (R-ADT) Systems for Automated Patient Care Information Systems, 1994.
- [ASTM E1284-97](#), Standard Guide for Construction of a Clinical Nomenclature for Support of Electronic Health Records, 1997.
- [ASTM E1384-96](#), Standard Guide for Content and Structure of the Computer-Based Patient Record, 1996.

- [ASTM E1460-92](#), Standard Specification for Defining and Sharing Modular Health Knowledge Bases, 1992.
- [ASTM E1712-97](#), Standard Specification for Representing Clinical Laboratory Test and Analyte Names, 1997.
- [ASTM E1713-95](#), Standard Specification for Transferring Digital Waveform Data between Independent Computer Systems, 1995.
- [ASTM E1714-95](#), Standard Guide for Properties of a Universal Healthcare Identifier, 1995.
- [ASTM E1715-95](#), Standard Practice for An Object-Oriented Model for Registration, Admitting, Discharge, and Transfer (R-ADT) Functions in Computer-Based Patient Record Systems, 1995.

The ASTM is developing additional standards for medical information exchange. For example, ASTM Technical Subcommittee E31.12 (Computer-based Patient Records) is developing a standard specification for drug therapy documentation and E31.15 (Health Knowledge Representation) is developing standard icons for medicine. These standards will be considered for the Medical subdomain once they are published.

## **CS.MED.2.5 Human-Computer Interface Standards**

### **CS.MED.2.5.1 Introduction**

#### **CS.MED.2.5.2 Mandated Standards**

There are no mandated standards for human-computer interfaces (HCIs) applicable to the Medical subdomain beyond those in [Section 2.5.2](#) of the JTA Core and [Section CS.2.5](#) of the Combat Support Domain Annex.

#### **CS.MED.2.5.3 Emerging Standards**

There are no emerging standards for HCIs applicable to the Medical subdomain beyond those in [Section 2.5.3](#) of the JTA core and [Section CS.2.5](#) of the Combat Support Domain Annex.

## **CS.MED.2.6 Information-Security Standards**

### **CS.MED.2.6.1 Introduction**

#### **CS.MED.2.6.2 Mandated Standards**

There are no mandated information-security standards applicable to the Medical subdomain beyond those specified in [Section 2.6.2](#) of the JTA Core and [Section CS.2.6](#) of the Combat Support Domain Annex. However, the *Military Health Services System (MHSS) Automated Information System (AIS) Security Policy Manual*, Version 1.0, April 1996, published by OASD(HA), contains information-security policies, procedures, and guidance (not standards) for the MHS. System configuration and administration in accordance with the latest version of this document is necessary to ensure the secure operation of the MHS.

#### **CS.MED.2.6.3 Emerging Standards**

There are no emerging information-security standards applicable to the Medical subdomain beyond those specified in [Section 2.6.3](#) of the JTA Core and [Section CS.2.6](#) of the Combat Support Domain Annex. However, HIPAA requires Federal regulations governing the security and privacy of medical data to be issued by 21 February 2000, unless Congress enacts legislation on this subject by 21 August 1999.



# Modeling and Simulation Domain Annex

## M&S.1 Domain Overview

### M&S.1.1 Purpose

The Modeling and Simulation (M&S) Domain Annex identifies additions to the JTA Core elements (standards, interfaces, and service areas) listed in Section 2 of the JTA. These additional standards are key to the Interoperability of M&S within DoD among themselves and real-world systems.

### M&S.1.2 Background

In 1992, DoD established a vision for modeling and simulation, as stated in the DoD M&S Master Plan. “Defense modeling and simulation will provide readily available, operationally valid environments for use by the DoD Components

- ☐ To train jointly, develop doctrine and tactics, formulate operational plans, and assess warfighting situations.
- ☐ To support technology assessment, system upgrade, prototype and full-scale development, and force structuring.

Common use of these environments will promote a closer interaction between the operations and acquisition communities in carrying out their respective responsibilities. To allow maximum utility and flexibility, these modeling and simulation environments will be constructed from affordable, reusable components interoperating through an open-systems architecture.” (Executive Council for Modeling & Simulation).

Department of Defense Directive 5000.59, DoD Modeling and Simulation (M&S) Management, January 4, 1994; and DoD 5000.59-P, DoD Modeling and Simulation (M&S) Master Plan (MSMP), October 1995, outline DoD policies, organizational responsibilities, and management procedures for M&S and provide a comprehensive strategic plan to achieve DoD’s vision of readily available, authoritative, interoperable, and reusable simulations.

Objective 1 of the DoD MSMP states “Provide a common technical framework for M&S” and includes, under sub-objective 1-1, the establishment of “a common high-level simulation architecture to facilitate the interoperability of all types of simulations among themselves and with C4I systems, as well as to facilitate the reuse of M&S components.” The efficient and effective use of models and simulations across DoD and supporting industries requires a common technical framework for M&S to facilitate interoperability and reuse. This common technical framework consists of :

- ☐ A high-level architecture (HLA) to which simulations must conform.
- ☐ Conceptual models of the mission space (CMMS) to provide a basis for the development of consistent and authoritative M&S representation.
- ☐ Data standards to support common understanding of data across models, simulations, and real-world systems.

The HLA is a progression from the previous architectures and associated standards that have been developed and used successfully for specific classes of simulation. These include Distributed Interactive Simulation (DIS) protocol standards, which support networked, real-time, platform-level virtual simulation and the Aggregate-Level Simulation Protocol (ALSP), which is used to support distributed, logical-time, constructive simulations. The HLA provides a common architecture for all classes of simulation and, consequently, the HLA supersedes both the DIS and ALSP standards. Transition of simulations from use of other standards is underway in accordance with DoD M&S policy.

### M&S.1.3 Domain Description

This domain annex provides a set of standards affecting the definition, design, development, execution, and testing of models and simulations. DoD modeling and simulation ranges from high-fidelity engineering simulations to highly aggregated, campaign-level simulations involving joint forces. Increasingly, DoD and supporting industries are integrating and operating a mix of computer simulations, actual warfighting systems, weapon simulators, and instrumented ranges to support a diversity of applications including training, mission rehearsal, operational course of action analysis, investment analysis, and many aspects of acquisition support throughout all phases of the system life cycle. Figure M&S-1 shows the position of the M&S Domain in the Notional JTA Hierarchy.

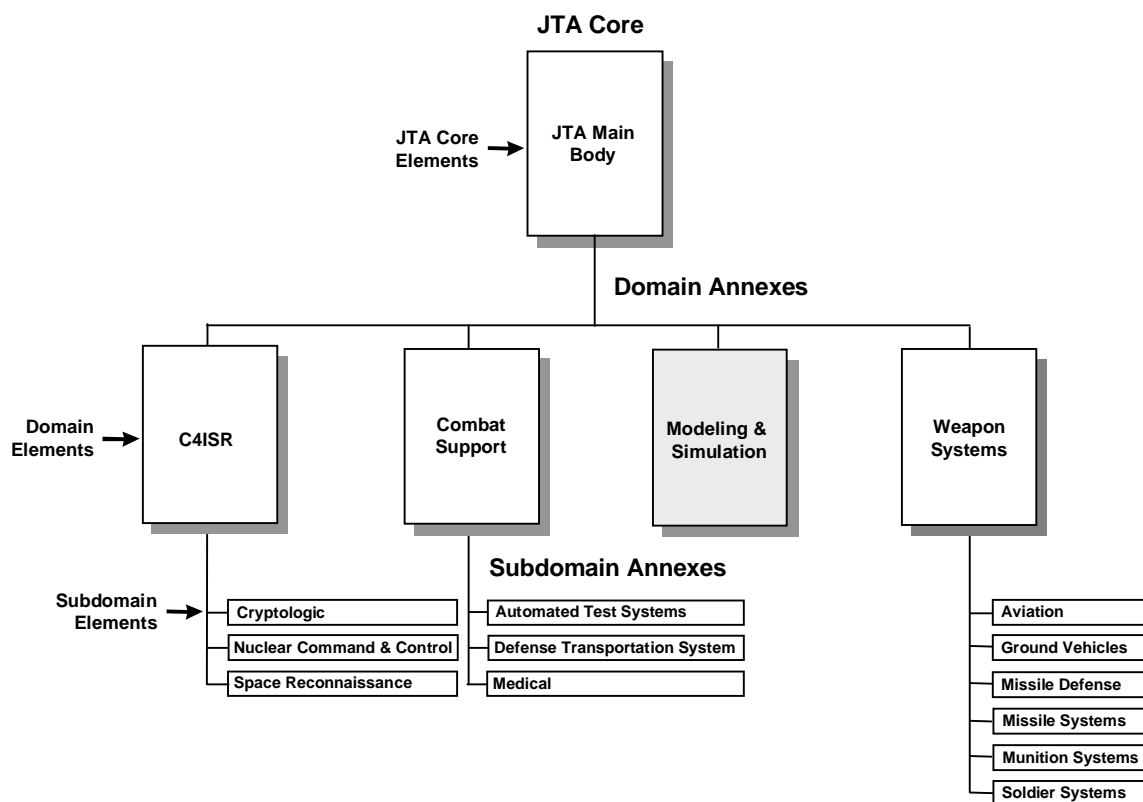


Figure M&S-1: Notional JTA Hierarchy

#### **M&S.1.4 Scope and Applicability**

The Under Secretary of Defense for Acquisition and Technology (USD[A&T]) in 1996 designated the HLA as the standard technical architecture for all DoD simulations. The HLA is a technical architecture that applies to all classes of simulations, including virtual simulations, constructive simulations, and interfaces to live systems. The virtual simulation class comprises human-in-the-loop simulators. The constructive simulation class includes wargames and other automated simulations that represent actions of people and systems in the simulation. The live simulation class includes C4I interfaces, weapon systems/platforms with embedded collective training, and instrumented ranges. The method of implementation is at the discretion of the responsible Service, Staff, or Agency.

M&S developed as an integral part of a weapon system or C4I system, or an embedded simulation, will fall under the mandates of the JTA main body, this domain annex, and any other applicable domain annexes. Interoperability of embedded simulations will be governed by this domain annex.

The HLA and related M&S standards listed here address those key technical aspects of simulation design necessary to foster interoperability and reuse, but avoid overly constraining implementation details. They are intended for use in simulations addressing a full range of training, analysis, and acquisition requirements, each of which may have different objectives that dictate different representational details, timing constraints, processing demands, etc. The M&S technical standards in this annex provide the framework within which specific systems, targeted against precise requirements, can be developed. While many of these systems will operate in computational environments considered standard and that fall within the spectrum of the other JTA standards, some may require massively parallel processing or other unique laboratory configurations, bringing with them their own set of requirements. Simulation developers should follow those standards required for the environment in which the simulation is implemented.

Mandates listed in this domain annex are in addition to those listed in Section 2 of the JTA Core.

#### **M&S.1.5 Technical Reference Model**

There is no separate Technical Reference Model established for the M&S domain.

#### **M&S.1.6 Annex Organization**

The Modeling and Simulation Domain Annex consists of three sections. Section M&S.1 contains the overview, Section M&S.2 contains those Information Technology mandated and emerging standards that are additions to the standards contained in the core, and Section M&S.3 is reserved for those mandates for modeling and simulation that are domain-specific because they do not map directly to the core service areas.

### **M&S.2 Additions to the JTA Core**

#### **M&S.2.1 Introduction**

The following standards apply in addition to those found in the JTA Core. On September 10, 1996, the Under Secretary of Defense for Acquisition and Technology (USD[A&T]) designated the HLA as the standard technical architecture for all DoD simulations. The HLA, as mandated, is defined by the HLA Rules, the HLA Interface Specification, and the HLA Object Model Template

Specification. Compliance criteria have been set forth in the compliance checklist, which was developed as part of the HLA, along with the HLA test procedures. These form the technical basis for HLA compliance. Current versions are listed and available at the Defense Modeling and Simulation Office Web site at <http://www.dmsomil>.

## **M&S.2.2 Information-Processing Standards**

### **M&S.2.2.1 Introduction**

In addition to those mandates for information-processing standards described in Section 2.2 of the JTA, the following are unique mandates applicable to the Modeling and Simulation domain.

### **M&S.2.2.2 Mandated Standards**

#### **M&S.2.2.2.1 HLA Framework and Rules**

HLA Rules: These rules comprise a set of underlying technical principles for the HLA. For federations, the rules address the requirement for a federation object model (FOM), object ownership and representation, and data exchange. For federates, the rules require a simulation object model (SOM), time management in accordance with the HLA Runtime Infrastructure (RTI) time management services, and certain restrictions on attribute ownership and updates. The following standard is mandated:

- [IEEE P 1516. Modeling and Simulation \(M&S\) High Level Architecture \(HLA\)](#) - Framework and Rules, Version 1.3, 23 April 1999.

#### **M&S.2.2.2.2 HLA Federate Interface Specification**

HLA Interface Specification: HLA federates interact with an RTI (analogous to a special-purpose distributed operating system) to establish and maintain a federation and to support efficient information exchange among simulations and other federates. The HLA interface specification defines the nature of these interactions, which are arranged into sets of basic RTI services. On 11 November 1998 the Object Management Group (OMG) Board of Directors adopted the HLA Interface Specification v1.3 (services description and OMG IDL API). The following standard are mandated:

- [OMG Facility for Distributed Simulation Systems](#), Version 1.0, dated 10 November 1998.
- [IEEE P 1516.1](#), Modeling and Simulation (M&S) High Level Architecture (HLA) Federate Interface Specification, Version 2, 23 April 1999.

#### **M&S.2.2.2.3 HLA Object Model Template (OMT)**

HLA Object Model Template: The HLA requires simulations (and other federates) and federations to each have an object model describing the entities represented in the simulations and the data to be exchanged across the federation. The HLA Object Model Template prescribes the method for recording the information in the object models, including objects, attributes, interactions, and parameters, but it does not define the specific data (e.g., vehicles, unit types) that will appear in the object models. The following standard is mandated:

- [IEEE P Standard 1516.2](#), Modeling and Simulation (M&S) High Level Architecture (HLA) Object Model Template (OMT) Specification, Version 1.3, 23 April 1999.

### **M&S.2.3 Information-Transfer Standards**

There are no additional Information-Transfer Standards applicable to modeling and simulation beyond those specified in [Section 2.3](#) of the JTA.

### **M&S.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

#### **M&S.2.4.1 Introduction**

In addition to those mandated standards for Information-Modeling, Metadata, and Information-Exchange Standards described in [Section 2.4.2](#) of the JTA, the following mandated standards are applicable to the Modeling and Simulation domain.

#### **M&S.2.4.2 Mandated Standards**

##### **M&S.2.4.2.1 Federation Execution Details Data Interchange Format**

This Data Interchange Format (DIF) is the input/output vehicle for sharing HLA initialization data. It contains data from the Federation Object Model as well as additional initialization data needed by the HLA Runtime Infrastructure (RTI) and other HLA initialization tools. The Federation Execution Details (FED) DIF is part of the HLA Interface Specification referenced above. The following standard is mandated:

- [Federation Execution Details Data Interchange Format](#), Version 1.3, February 1998. 


##### **M&S.2.4.2.2 Object Model Template Data Interchange Format**

A data interchange format has been adopted as an input/output vehicle for sharing HLA object models presented in the standard Object Model Template (OMT) among object model developers and users. The following standard is mandated:

- [Object Model Template Data Interchange Format \(OMT DIF\)](#), Version 1.3, February 1998. 

##### **M&S.2.4.2.3 Standard Simulator Database Interchange Format**

A DoD data exchange standard (MIL-STD-1821) has been adopted as an input/output vehicle for sharing externally created visual terrain simulator databases among the operational system-training and mission-rehearsal communities. The following standard is mandated:

- [MIL-STD-1821](#), Standard Simulator Data Base (SSDB) Interchange Format (SIF) Design Standard, 17 June 1993, with Notice of Change 1, 17 April 1994, and Notice of Change 2, 17 February 1996. 

#### **M&S.2.4.3 Emerging Standards**

##### **M&S.2.4.3.1 Synthetic Environment Data Representation and Interchange Specification**

No standard currently exists for comprehensively describing and interchanging environmental data in all domains (terrain, ocean, atmosphere, and space) among M&S applications supporting the broad range of acquisition, analysis, and training requirements. SIF will be replaced by Synthetic Environment Data Representation and Interchange Specification (SEDRIS). SEDRIS establishes a uniform and effective interchange specification for the pre-runtime distribution of source data and integrated databases. The specification encompasses a robust data model, data dictionary, and interchange format supported by read-and-write APIs, data viewers, a data model browser, and

analytical verification and validation data model compliance tools. While designed to meet M&S community requirements, the interchange specification has the potential for also being used for natural environment data in DoD operational systems.

#### **M&S.2.4.3.2 Object Model Data Dictionary**

The Object Model Data Dictionary is being developed to support the development and reuse of Federation Object Models (FOMs) and Simulation Object Models (SOMs). This will greatly reduce the time needed to develop new HLA applications and transition legacy systems to the HLA. Initially, content standards are being developed based on the requirements of several programs that are early adopters of the HLA standards. The early adopter programs cover a broad range of simulation applications from engineering to analysis and multiple levels of aggregation from platform-level (previously addressed by the IEEE 1278.1 Protocol Data Unit standards) to aggregate-unit simulations (previously addressed by the Aggregate-Level Simulation Protocol). The object model requirements of these programs are being consolidated into a common set of data elements, specifying both semantics and syntax. Where existing DoD standards do not exist, they will be developed through the HLA Object Model Data Dictionary process.

#### **M&S.2.5 Human-Computer Interface Standards**

There are no additional Human-Computer Interface standards applicable to modeling and simulation beyond those specified in [Section 2.5](#) of the JTA

#### **M&S.2.6 Information-Security Standards**

There are no additional Information-Security standards applicable to modeling and simulation beyond those specified in [Section 2.6](#) of the JTA.

#### **M&S.3 Domain-Specific Service Areas**

There are no domain-specific services areas for the Modeling and Simulation domain.

# Weapon Systems Domain Annex

## WS.1 Domain Overview

A weapon system is a combination of one or more weapons with all related equipment, materials, services, personnel, and means of delivery and deployment (if applicable) required for self-sufficiency (Joint Pub 1-02).

### WS.1.1 Purpose

This annex identifies standards for the Weapon Systems (WS) domain including information standards and analogous standards applicable to weapon systems.

### WS.1.2 Background


This domain annex follows the JTA Core document structure to facilitate the identification and traceability of the Weapon Systems domain additions to the standards mandated in the main body of the JTA. Therefore, the Weapon Systems Domain Annex consists of three sections including: Domain Overview, Mandated Standards, and Emerging Standards.

Weapon Systems mandated standards result from consensus concerning the need for the standards and the maturity of their commercial implementations within the Weapon Systems domain or within the majority of its subdomains.

Currently there are sections within the Weapons Systems Domain Annex and its subdomains that do not specify mandated additions to the JTA Core. However, due to their hard real-time and embedded-system requirements, the Weapon Systems subdomains are evaluating the available real-time standards for possible mandate as additions to each section of the JTA, where appropriate.

### WS.1.3 Domain Description

Weapon systems have special attributes (e.g., timeliness, embedded nature, space and weight limitation), adverse environmental conditions, and critical requirements (e.g., survivability, low power/weight, and dependable hard real-time processing) that drive system architectures and make system hardware and software highly interdependent and interrelated. The position of the Weapon Systems domain in the Notional JTA Hierarchy is shown in [Figure WS-1](#).

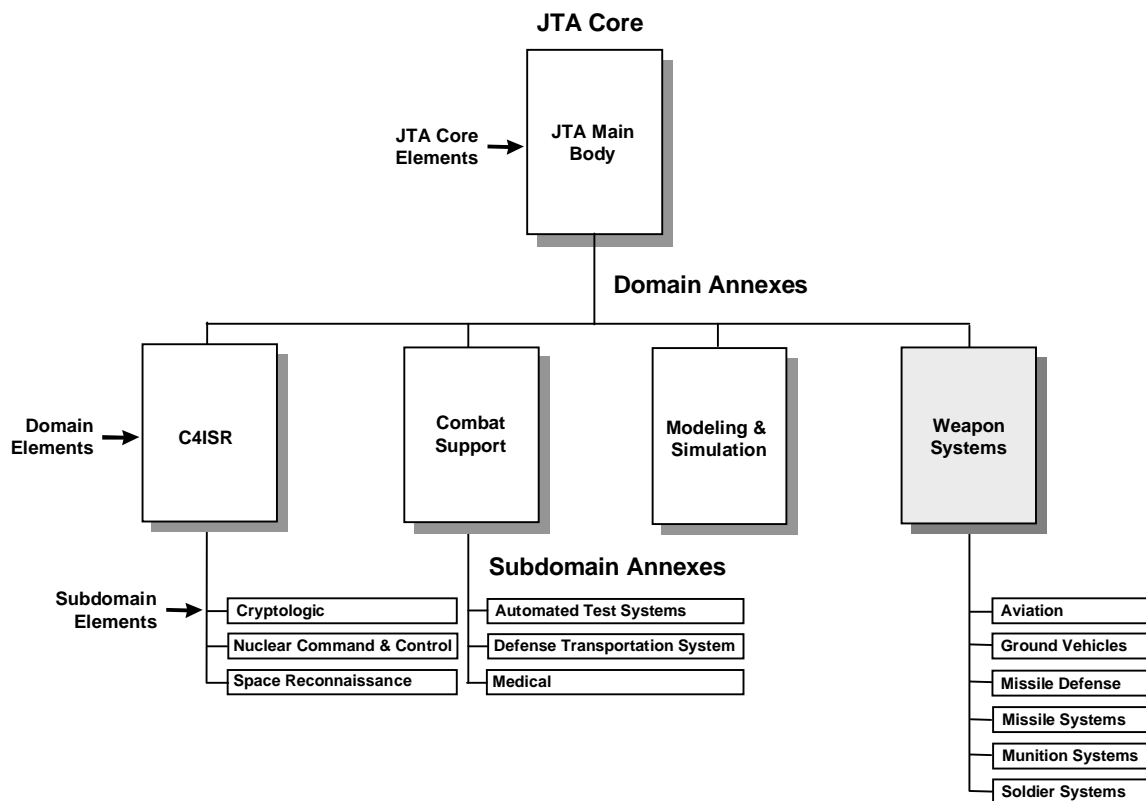

**Figure WS-1: Notional JTA Hierarchy**

#### **WS.1.4 Scope And Applicability**

A domain is defined as a distinct functional area that can be supported by a family of systems with similar requirements and capabilities. The Weapon Systems Domain Annex, in conjunction with the JTA Core, establishes the minimum set of rules governing the application of information technology between weapon systems, where a weapon system is defined as a combination of one or more weapons with all related equipment, materials, services, personnel, and means of delivery and deployment (if applicable) required for mission success (Joint Pub 1-02). The Weapon Systems domain encompasses a subset of the JTA and the specific supporting standards profile. For the purposes of the JTA, the Weapon Systems Domain is that domain whose systems' primary function is that of supporting attack and/or defense against an adversary, and that are intentionally designed to interoperate with other weapon systems and/or with systems external to the Weapon Systems domain.

The Weapon Systems Domain Annex is applicable to all weapon systems as defined in Joint Pub 1-02.



For the purposes of the JTA, the Weapon Systems Domain is organized into subdomains to facilitate the identification of interoperability standards for common areas while maintaining the systems' primary design function of supporting attack and/or defense against an adversary.

The inclusion or exclusion of subdomains in the Weapon Systems domain is based upon the domain participants' agreement to include or exclude a candidate. It is important to note that some weapon systems incorporate features/functions associated with more than one subdomain and therefore must consider the applicable standards from the pertinent subdomains. The current weapon systems subdomains are:

- ☐ **Aviation subdomain** – Includes all DoD weapon systems on aeronautical platforms, except missiles—manned and unmanned, fixed-wing, and rotary-wing.
- ☐ **Ground Vehicle subdomain** – Includes all DoD weapon systems on moving ground platforms, except missiles—wheeled and tracked, manned, and unmanned.
- ☐ **Missile Defense subdomain** – Includes any system or subsystem (including associated Ballistic Missile/C4I systems) with a mission to detect, classify, identify, intercept, and destroy or negate the effectiveness of enemy aircraft or missiles before launch or while in flight so as to protect U.S. and coalition forces, people, and geopolitical assets.
- ☐ **Missile Systems subdomain** – Includes Strategic and Theater Ballistic Missile Systems, Cruise Missile Systems, and rocket and missile systems used in diverse Battlefield Functional Areas including Fire Support, Close Combat, and Special Operations.
- ☐ **Munition Systems subdomain** – Includes any system or subsystem containing an explosive warhead (such as dumb, smart, and precision bombs, or mines and artillery shells) and that detects, classifies, identifies, intercepts, and destroys or negates the effectiveness of the enemy.
- ☐ **Soldier Systems subdomain** – Includes any system or subsystem integrating target location, target identification, target acquisition, enhanced survivability, navigation, position location, enhanced mobility, and command-and-control into a system worn or carried by an individual soldier in performance of assigned duties.

## **WS.1.5 Technical Reference Model**

### **WS.1.5.1 DoD TRM Views**

The Weapon Systems domain and subdomains use both the DoD Technical Reference Model (TRM) Service View and the Interface View, as described in [Section 2.1.2.1](#). The Interface View is more applicable to real-time systems. Services are best described by the DoD TRM Services View. Interface standardization in weapon systems is a goal of the Open-Systems Joint Task Force (OSJTF) of DoD. Both views are needed to capture all of the standards required for the Weapon Systems domain and subdomains to operate within the DoD enterprise.

[Figure 2.1-1](#) depicts the two distinct views of the DoD TRM. Both views are traceable to the POSIX Open Systems Environment (OSE) Reference Model. The Service View extends the POSIX model by decomposing its entities into the specific applications and services that support DoD information and computing systems. The Interface View is based on the Generic Open Architecture (GOA) framework (SAE AS 4893, 1 Jan 1996) and provides a context for identifying

the characteristics of exchanged information (logical interfaces) and the method or mechanism used for information transport (direct interfaces). A short explanation of the TRM is provided here; however, for more detail, readers are encouraged to review the TRM document.

The Interface View identifies both logical and direct interfaces. A logical interface defines requirements for peer-to-peer interchange of data. It identifies senders, receivers, data types, frequency of exchange, and formats. A direct interface identifies the characteristics of the information-transfer medium. Simply stated, logical interfaces define what information is transferred; the direct interfaces define how the information is transferred. Logical interfaces are implemented with direct interfaces.

The Interface View expands the Application Platform entity within the POSIX model to include the three other layers: Systems Services Layer (which contains the Operating System Services and eXtended Operating System Services secondary layers), Resource Access Services Layer, and Physical Resources Layer. The Interface View includes the 4L, 3L, 2L, and 1L for peer-to-peer logical interfaces, and the 4D, 4X, 3X, 3D, 2D, and 1D direct interfaces. The Application Program Interface (API) of the POSIX model is synonymous with the 4D interface, while the External Environment Interface (EEI) is synonymous with the 1L and 1D interfaces treated as a pair. Thus the Interface View complements the Service View by expanding the Application Platform entity, and by providing language to describe both application-to-application logical interfaces, and the Application Platform-to-Application Platform logical interfaces (3L and 2L interfaces).

The Service View, unlike the Interface View, categorizes services available in the Applications Platform. The Application Platform service areas defined by the Service View include both runtime and pre-run-time services. The Service View addresses only 4D API interfaces and 1D/1L EEI interfaces. The Service View does not address 2L, 3L, or 4L peer-to-peer logical interfaces, 3X, 3D, or 2D direct interfaces, nor does it address the Resource Access Services Layer or the Physical Resources Layer.

Section WS.2 uses the Service View and identifies additions to the JTA Core standards, and Section WS.3 uses the layers identified in the Interface View as a context for classifying interface standards used in weapon system platforms. WS.2 and WS.3 both include emerging standards that represent current standards work within the Weapon Systems domain.

#### **WS.1.5.1.1 Performance Environment**

One of the most distinctive features of a weapon system is the importance of performance characteristics. Weapon systems are developed to meet stringent operational performance criteria in order to be accurate and lethal; and to survive. In order to emphasize this issue, performance is modeled as a separate external environment entity. At the lower level of TRMs, performance will be an integral part of the services.

#### **WS.1.5.1.2 Application Hardware Environment**

Within weapon systems, embedded-computing hardware and software components are highly interdependent in order to satisfy very demanding requirements. The DoD TRM Service View often does not fit a general-purpose computing model very well. Therefore the DoD TRM Interface View is used to capture such features as interconnect and open-systems hardware standards.

### **WS.1.5.2 Hierarchy of TRM Views**

In order to capture the diversity found in weapon subsystem design, a hierarchical approach to TRM Views is being established. From the DoD TRM in Figure WS-2, the DoD TRM Interface View will extend downward into the Weapon Systems domain and subdomains to provide the basis for standards identification and traceability.

### **WS.1.6 Domain Annex Organization**

This domain annex is divided into three sections: the Overview in Section WS.1, the Additions to the JTA Core service areas in Section WS.2, and the domain-specific service areas and interfaces in Section WS.3. Section WS.2 follows the JTA Section 2 service-area structure. The structure of Section WS.3 will evolve as WS-specific service areas are identified and a common structure is coordinated among the other annexes.

## **WS.2 Additions to the JTA Core**

### **WS.2.1 Introduction**

The DoD TRM Interface View provides for sufficient fidelity to identify critical functions, interfaces, and technical issues.

### **WS.2.2 Information-Processing Standards**

This section applies to mission-area, support application, and application platform service software developed or procured to process information for weapon systems.

#### **WS.2.2.1 Introduction**



##### **WS.2.2.2 Mandated Standards**

There are no mandated standards for the Information-Processing Standards section.

##### **WS.2.2.3 Emerging Standards**

###### **WS.2.2.3.1 Operating-System Services**

The OSJTF is sponsoring and synchronizing Weapon Systems domain involvement in the IEEE POSIX working groups. The following real-time-related standards are emerging:

- [IEEE P1003.5c/D3 POSIX](#)-Part 1: Binding for API – Amendment 2: Protocol Independent Interfaces, October 1997. 
- [IEEE P1003.5f POSIX](#): Ada binding to 1003.21, January 1997. 

###### **WS.2.2.3.2 Real-Time Common Object Request Broker Architecture**

Real-time Common Object Request Broker Architecture (CORBA) – The OMG Special Interest Group is evaluating the need for real-time object-oriented standards and products to support real-time embedded systems. As more information becomes available from this group, the Weapon Systems domain will consider adopting the standards as additions to the JTA information-processing standards.

### **WS.2.3 Information-Transfer Standards**

There are no mandated or emerging standards for the Information-Transfer Standards section.

#### **WS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

This section fosters information exchange among Weapon Systems during their development and maintenance phases. During concept exploration and development, a large number of information elements, objects, and artifacts are generated. If these elements, objects, and artifacts are shared across weapon system developments, considerable resources can be saved.

Real-time, embedded-processing systems must be developed within a development support environment for an entire system. As such, they must integrate into a systems-engineering process that culminates in prototype or production weapon systems that meet specific functional and performance requirements.




##### **WS.2.4.1 Introduction**

##### **WS.2.4.2 Mandated Standards**

There are no mandated standards for the Information-Modeling, Metadata, and Information-Exchange standards.

##### **WS.2.4.3 Emerging Standards**

The following emerging standards are being considered for mandate by the Weapon Systems domain as an addition to the JTA information-modeling standards:

- [IEEE 1076](#):1993, Standard VHSIC Hardware Description Language (VHDL) Reference Manual, 1993. (VHDL is a high-level hardware language). 
- [IEEE 1076.2](#): VHDL Mathematical Package, 1996. 
- [IEEE 1076.3](#): Standard VHDL Synthesis Packages, 1997. 

#### **WS.2.5 Human-Computer Interface Standards**

This section provides a common framework for Human-Computer Interfaces (HCI) design and implementation in weapon systems. It complements and extends the DoD HCI Style Guide, Version 2.0, 10 October 1997. The objective is to standardize user interface design and implementation options across weapon systems, thus enabling applications within the Weapon Systems domain to appear and behave consistently, resulting in higher productivity, shorter training time, and reduced development, operation, and support costs besides influencing commercial HCI development. This version mandates the design of graphical and character-based displays and controls for weapon systems.

In order to identify appropriate systems to use for baseline characterization, the following working definition for time criticality is used: “Systems where no perceptible delay exists between the time an event occurs and the time it is presented to the user; and where there is an operational requirement for the user to quickly recognize this presentation, comprehend its significance, and determine and execute appropriate action(s).”

There are some aspects of HCIs that can be common across the Weapon Systems domain, while others are subdomain-specific. Hence, an HCI style guide is required at the weapon systems level, and currently for each subdomain.

**WS.2.5.1 Introduction****WS.2.5.2 Mandated Standards**

There are no mandated standards additions for the Human-Computer Interface Standards section.

**WS.2.5.3 Emerging Standards**

The Weapon Systems Human-Computer Interface (WSHCI) Style Guide addresses guidelines applicable across most or all of the Weapon Systems domain. It provides a starting point for the development of the subdomain-specific style guides that will further the goal of standardization. Also, the WSHCI Style Guide provides design guidance based on lessons learned and best practices from past HCI efforts. However, the WSHCI Style Guide does not provide the level of design guidance needed to attain a common behavior and appearance. This is left to the subdomain-specific style guides. The following U.S. Army document is proposed as the starting point to become the joint weapon system style guide and is an emerging standard:

- [U.S. Army Weapon Systems Human-Computer Interface \(WSHCI\) Style Guide](#), Version 2.0, 31 December 1997. 

**WS.2.6 Information-Security Standards**

There are no mandated or emerging standards for the Information-Security Standards section.

**WS.3 Domain-Specific Service Areas and Interfaces****WS.3.1 Introduction**

The GOA Framework depicted by the TRM Interfaces View of Figure WS-2 provides sufficient fidelity for identifying classes of interfaces to apply open-systems interface standards to the design of real-time and embedded-hardware/software systems. The Framework also facilitates the identification of critical functions and interfaces within the real-time and embedded-computing systems of the Weapon Systems domain.

This section provides a common framework identifying mandated and emerging embedded-computing interface standards associated with the logical and direct interface classes defined for the layers depicted in the DoD TRM.

Only those layers of the DoD TRM that have subdomain-specific mandated or emerging standards identified are addressed in this section.

**WS.3.2 Application Software Layer Interfaces**

There are no additional mandated or emerging standards for the Application Software Layer Interfaces section.

**WS.3.3 System Services Layer Interfaces**

There are no additional mandated or emerging standards for the System Services Layer Interfaces section.

### **WS.3.4 Resource Access Services Layer Interfaces**

There are no additional mandated or emerging standards for the Resource Access Services Layer Interfaces section.

### **WS.3.5 Physical Resources Layer Interfaces**



#### **WS.3.5.1 Introduction**

#### **WS.3.5.2 Mandated Standards**

There are no mandated standards for the Physical Resources Layer Interfaces section.

#### **WS.3.5.3 Emerging Standards**

The following are being evaluated as emerging interface standards by the Weapon Systems domain:

- [IEEE P1386.1/D2.0](#), Physical/Environmental Layers for Peripheral Component Interface (PCI) Mezzanine Cards (PMC), April 1995. 
- [ATSC Document A/53](#), ATSC Digital Television Standard, 16 September 1995. 

### **WS.3.6 Combat Identification (CI) Services**

Combat Identification (CI) is the process of obtaining an accurate characterization of entities in a combatant's area of responsibility to the extent that high-confidence, real-time application of tactical options and weapon resources can occur (approved Joint Combat Identification Master Plan, August 1995).

The increased lethality of weapon systems, and the increase in the speed and ferocity with which air and land battles are fought has resulted in a greater need for capabilities that will aid warfighters in reducing fratricide. Positive visual identification of friends and foes (IFF) during battles fought under degraded natural and man-made conditions is difficult at best when opposing forces use dissimilar equipment and tactics to those of our own forces. However, our modern world of changing alliances and the use of multi-national forces in United Nations (UN) peacekeeping efforts to quell geopolitical disturbances has made a difficult problem even tougher because friends and foes alike are now using identical combat platforms, creating a situational awareness (SA) nightmare.

#### **WS.3.6.1 Identification Friend or Foe (IFF)**

The primary function of IFF is to establish the identity of all friendly systems within the surveillance volume of surface-to-air, air-to-air, and some air-to-ground Weapon System platforms. The need for Friend identification is to permit tactical action against all Foe (non-friendly) systems and to avoid tactical action against Friendly systems. This need is a key element in modern combat, as an object detected by a sensor, even beyond visual range, has to be identified and classified as early as possible so that, if necessary, either an appropriate defense can be prepared against the Foe or that steps can be taken to prevent the Friend from being engaged/attacked by Friendly forces.

**WS.3.6.1.1 Introduction****WS.3.6.1.2 Mandated Standards**


There are no mandated standards for the Identification Friend or Foe (IFF) section.

**WS.3.6.1.3 Emerging Standards**


All standards listed in this section are emerging for new and upgraded Weapon Systems platforms requiring integrated or applique IFF capabilities:

- [Aeronautical Telecommunications](#): Annex 10 to the Convention on International Civil Aviation, Volume IV (Surveillance Radar and Collision Avoidance Systems), Edition 1, International Civil Aviation Organization (ICAO): Montreal, 1995, with Supplements (31 May 1996 and 10 November 1997).
- [DOT FAA 1010.51A](#), 8 March 1971: US National Aviation Standard for the Mark X (SIF) Air Traffic Control Radar Beacon system (ATCRBS) Characteristics.
- [DoD AIMS 97-1000](#), 18 March 1998, Performance/Design and Qualification Requirements Technical Standard For The ATCRBS/IFF/MARK XII Electronic Identification System and Military Mode S.
- [DoD AIMS 97-900](#), 18 March 1998, Performance/Design And Qualification Requirements Mode 4 Input/Output Data.


The following emerging standard provides a general description of required capabilities for military IFF systems:

- [STANAG 4193](#), Part 1, Edition 2, 12 November 1990, with Amendment 1, 15 December 1997: NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders. 


The following emerging standard defines the required anti-jamming capabilities of military IFF systems:

- [STANAG 4193](#), Part 2, Edition 1, 12 November 1990 (SECRET): NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders. 


The following emerging standard defines the required characteristics/capabilities of installed military IFF systems:

- [STANAG 4193](#), Part 3, Edition 1, 12 November 1990, with Amendment 1, 31 January 1995: NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders. 

The following emerging standard defines the required characteristics of military IFF systems to provide Mode S capabilities:

- [STANAG 4193](#), Part 4, 28 November 1997: NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders. 

The following standard defines the required characteristics of military IFF systems to support the new Mode 5 capabilities:

- [STANAG 4193](#), Part 5, Annex A through D, 4 September 1998 (SECRET NATO RESTRICTED): NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders. 



## **Aviation Subdomain Annex for the Weapon Systems Domain**

### **WS.AV.1 Subdomain Overview**

A weapon system is a combination of one or more weapons with all related equipment, materials, services, personnel, and means of delivery and deployment (if applicable) required for self-sufficiency.

Systems covered within the Aviation subdomain include all DoD weapon systems on aeronautical platforms except missiles—manned and unmanned, fixed-wing and rotary-wing.

This subdomain has been designated as an “emerging subdomain” for JTA 3.0. All standards in this subdomain are designated as emerging and are not mandated by JTA 3.0.

#### **WS.AV.1.1 Purpose**

This subdomain annex identifies standards for the Aviation subdomain of the Weapon Systems domain including information standards and analogous standards applicable to aviation systems.

#### **WS.AV.1.2 Background**

The proposed and emerging standards in this subdomain are based on the work performed by the Army Weapon Systems Technical Architecture Working Group (WSTAWG).

#### **WS.AV.1.3 Subdomain Description**

The subdomain description is given in Section WS.AV.1.

#### **WS.AV.1.4 Scope And Applicability**

This subdomain annex does not include any mandates at this time. Emerging standards are identified. Mandates are expected to be added in the next version of the JTA. Some proposed standards are identified.

#### **WS.AV.1.5 Technical Reference Model**

The technical reference model adopted for use in this subdomain is the DoD Technical Reference Model (TRM), which is described in the Weapon Systems Domain Annex. The DoD TRM Service View and Interface View are used as applicable.

#### **WS.AV.1.6 Subdomain Annex Organization**

This subdomain annex is divided into three sections: the Overview in WS.AV.1, the additions to the JTA Core standards in WS.AV.2, and the Subdomain-Specific Services in WS.AV.3. WS.AV.2 follows the JTA Section 2 service area structure. The structure of WS.AV.3 will evolve as aviation-specific service areas are identified and a common structure is coordinated among the other domain and subdomain annexes.

**WS.AV.2 Additions to the JTA Core****WS.AV.2.1 Introduction**

This section identifies the standards for the Aviation subdomain that are additional to standards in the JTA Core.

**WS.AV.2.2 Information-Processing Standards****WS.AV.2.2.1 Introduction****WS.AV.2.2.2 Mandated Standards**

There are no mandated standards for the Information-Processing Standards section.

**WS.AV.2.2.3 Emerging Standards**

There are no emerging standards for the Information-Processing Standards section.

**WS.AV.2.2.3.1 Service-Area Standards**

There are no emerging service-area standards for the Information-Processing Standards section.

**WS.AV.2.2.3.1.1 Operating-System Services**

The Open-Systems Joint Task Force (OSJTF) is sponsoring and synchronizing Weapon Systems domain involvement in the IEEE Portable Operating System Interface (POSIX) working groups. Many POSIX standards are at various stages of standardization and are expected to be revised shortly to accommodate real-time systems' requirements and to provide for test methods.

**WS.AV.2.3 Information-Transfer Standards**

There are no mandated or emerging standards for the Information-Transfer Standards section.

**WS.AV.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

There are no mandated or emerging standards for the JTA Information-Modeling, Metadata, and Information-Exchange Standards section.

**WS.AV.2.5 Human-Computer Interface Standards****WS.AV.2.5.1 Introduction****WS.AV.2.5.2 Mandated Standards****WS.AV.2.5.2.1 Symbology**

There are no mandated standards for the Human-Computer Interface Standards section.

**WS.AV.2.5.3 Emerging Standards**

The following standard is not mandated in this version of the JTA, but is proposed for the next version of the JTA:

- [MIL-STD-1787B \(USAF\)](#), Aircraft Display Symbology, 5 April 1996. 

**WS.AV.2.6 Information-Security Standards**

There are no mandated or emerging standards for the Information-Security Standards section.

### **WS.AV.3 Subdomain-Specific Service Areas**

#### **WS.AV.3.1 Global Air Traffic Management Standards**

This section addresses civil air traffic management (ATM) interoperability for DoD aircraft in order to operate in the evolving global civil aviation airspace arena. This evolution is the result of the International Civil Aviation Organization (ICAO), and its associated Civil Aviation Authorities' (CAA's) desires to take advantage of advancements in the areas of Communications, Navigation, and Surveillance (CNS) technologies. The purpose is to move from a system of ground-based air traffic control to an airborne system of Air Traffic Management (ATM). As a result, DoD aircraft must conform, where required, to appropriate civil requirements and industry standards to meet future civil airspace requirements. If these aircraft are not properly equipped to operate in the airspace/civil aviation-regulated environment as it is defined, and accommodate its evolution, they will not be able to operate safely and effectively in airspace in which new separation standards and ATM procedures are being implemented by civil aviation authorities. Such aircraft may be excluded from operating in that airspace. The focus of this section is on communications and information-transfer standards for civil ATM interoperability.

#### **WS.AV.3.2 Introduction**

##### **WS.AV.3.2.1 Mandated Standards**

There are no mandated standards for Air Traffic Management Interoperability.

##### **WS.AV.3.2.2 Emerging Standards**

The following Air Traffic Management Interoperability Standards covering VHF Digital Link Mode 2, HF Data Link, Aeronautical Mobile Satellite Services, and Mode S capabilities that are needed to interoperate with civil communications infrastructures are considered emerging standards for the Aviation Systems subdomain:

- [RTCA DO-224](#) – Change 1, Signal-in-Space Minimum Aviation Systems Performance Standards (MASPS) Advanced VHF Digital Data, Communications Including Capability with Digital Voice Technique, 30 April 1998.
- [International Civil Aviation Organization \(ICAO\) Annex 10](#), Volume III, SARPs for High Frequency Data Link (HFDL), July 1995.
- [RTCA DO-210C](#), Minimum Operational Performance Standards For Aeronautical Mobile Satellite Services (AMSS), 16 January 1996.
- [RTCA DO-219](#), Minimum Operational Performance Standards for ATC Two-Way Data Link Communications, 27 August 1993.
- [RTCA DO-212](#), Minimum Operational Performance Standards for Airborne Automatic Dependent Surveillance (ADS) Equipment, 26 October 1992.
- [RTCA DO-181A](#), Minimum Operational Performance Standards for Air Traffic Control Radar Beacon System/Mode Select (ATCRBS/Mode S), Airborne Equipment, 14 January 1992, Change 1 errata 14 January 1993.

Page intentionally left blank.

## **Ground Vehicle Subdomain Annex for the Weapon Systems Domain**

### **WS.GV.1 Subdomain Overview**

A weapon system is a combination of one or more weapons with all related equipment, materials, services, personnel, and means of delivery and deployment (if applicable) required for self-sufficiency.

Systems covered within the Ground Vehicle (GV) subdomain include all DoD weapon systems on moving ground platforms except missiles—wheeled and tracked, manned and unmanned.

#### **WS.GV.1.1 Purpose**

This subdomain annex identifies standards for the Ground Vehicle subdomain of the Weapon Systems domain including information standards and analogous standards applicable to ground vehicle systems.

#### **WS.GV.1.2 Background**

The standards in this subdomain are based on the work performed by the Army Weapon Systems Technical Architecture Working Group (WSTAWG).

#### **WS.GV.1.3 Subdomain Description**

The subdomain description is given in Section WS.GV.1.

#### **WS.GV.1.4 Scope And Applicability**

The scope of this subdomain annex is the entire Ground Vehicle subdomain as defined in Section WS.GV.1.

#### **WS.GV.1.5 Technical Reference Model**

The Technical Reference Model used in this subdomain is the DoD Technical Reference Model (TRM), which is described in the Weapon Systems Domain Annex. The DoD TRM Service View and Interface View are used as applicable.

#### **WS.GV.1.6 Subdomain Annex Organization**

This subdomain annex is divided into three sections: the Overview in WS.GV.1, the additions to the JTA Core standards in WS.GV.2, and the Subdomain-Specific Services in WS.GV.3. WS.GV.2 follows the JTA Section 2 service area structure. The structure of WS.GV.3 will evolve as ground vehicle-specific service areas are identified and a common structure is coordinated among the other domain and subdomain annexes.

### **WS.GV.2 Additions to the JTA Core**

#### **WS.GV.2.1 Introduction**

This section identifies standards for the Ground Vehicles subdomain in addition to the standards in the JTA Core.

**WS.GV.2.2 Information-Processing Standards**

There are no mandated or emerging standards for the Information-Processing Standards section.

**WS.GV 2.2.1 Introduction****WS.GV 2.2.2 Mandated Standards**

There are no mandated standards in this section.

**WS.GV 2.2.3 Emerging Standards**

The Army WSTAWG Operating Environment (OE) IPT has developed an emerging Application Program Interface (API) that is being evaluated for use by the Ground Vehicle Systems subdomain:

- [Weapon Systems Technical Architecture Working Group \(WSTAWG\)](#) Operating Environment (OE) Application Programmer's Interface (API), Volume I, OE Application Interface, Version 1.0, 12 June 1998.

**WS.GV.2.3 Information-Transfer Standards**

There are no mandated or emerging standards for this section.

**WS.GV.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

There are no mandated or emerging standards for this section.

**WS.GV.2.5 Human-Computer Interface Standards**

There are no mandated or emerging standards for this section.

**WS.GV.2.6 Information-Security Standards**

There are no mandated or emerging standards for this section.

**WS.GV.3 Subdomain-Specific Service Areas and Interfaces****WS.GV.3.1 Introduction**

The GOA Framework depicted by the DoD TRM Interfaces View of Figure WS-2 provides sufficient fidelity for identifying classes of interfaces to apply open-systems interface standards to the design of real-time and embedded hardware/software systems. The Framework also facilitates the identification of critical functions and interfaces within the real-time and embedded-computing systems of the Ground Vehicle subdomain.

This section provides a common framework identifying mandated and emerging embedded-computing interface standards associated with the logical and direct interface classes defined for the layers depicted in the DoD TRM.

Only those layers of the DoD TRM that have subdomain-specific mandated or emerging standards identified are addressed in this section.

**WS.GV.3.2 Application Software Layer Interfaces**

There are no additional mandated or emerging standards for the Application Software Layer Interfaces section.

### **WS.GV.3.3 System Services Layer Interfaces**

There are no mandated or emerging standards for the System Services Layer Interfaces section.










### **WS.GV.3.4 Resource Access Services Layer Interfaces**

There are no mandated or emerging standards for the Resource Access Services Layer Interfaces section.



### **WS.GV.3.5 Physical Resources Layer Interfaces**

#### **WS.GV 3.5.1 Introduction**

#### **WS.GV 3.5.2 Mandated Standards**

- [MIL-STD-1553B](#), Standard for Medium Speed System Network Bus, 21 September 1978, with Notice of Change 1, 12 February 1980; Notice of Change 2, 8 September 1986; Notice of Change 3, 31 January 1993; and Notice of Change 4, 15 January 1996. 
- [ANSI/VITA 1](#), VME64 Specification, 1994. 
- [SAE J 1850](#), Class B Data Communication Network Interface, 1 July 1995. 
- [ANSI X3.131](#), Information Systems – Small Computer Systems Interface – 2 (SCSI-2), 1994. 
- [Personal Computer Memory Card International Association \(PCMCIA\)](#), PC Card Standard, March 1997. 
- [IEEE 1101.2](#), Standard for Mechanical Core Specifications for Conduction-Cooled Eurocards (ANSI), 1992. 
- [EIA 330](#), Electrical Performance Standards for Closed Circuit Television Camera 525/60 Interlaced 2:1 (ANSI/EIA 330-68), November 1966. 
- [EIA 343-A](#), Electrical Performance Standard for High Resolution Monochrome Closed Circuit Television Camera (November 1966), September 1969. 
- [PCI Industrial Computer Manufacturer's Group \(PICMG\)](#): Compact PCI Specification, R2.1, September 1997. 

The unique mission requirements of Ground Vehicle Systems dictate system and environmental constraints (e.g., long battery life, low power consumption, small size, light weight, shock-resistant, critical EMI-shielded constraints, all-weather operation) that make current the state-of-the-art digital and/or color video equipment unsuitable for use with Ground Vehicle Systems. Therefore, the following standards are mandated for Ground Vehicle systems employing analog and/or monochrome video technology:

- [EIA 170](#), Electrical Performance Standards – Monochrome Television Studio Facilities, November 1957. 
- [SMPTE 170M](#), Television – Composite Analog Video Signal – NTSC for Studio Applications, 1994. 

#### **WS.GV 3.5.3 Emerging Standards**

There are no emerging standards for this section.

Page intentionally left blank.



## Missile Defense Subdomain Annex for the Weapon Systems Domain

### WS.MD.1 Subdomain Overview

A weapon system is a combination of one or more weapons with all related equipment, materials, services, personnel, and means of delivery and deployment (if applicable) required for self-sufficiency.

Systems covered within the Missile Defense subdomain include any system or subsystem (including associated Ballistic Missile/C4I systems) with a mission to detect, classify, identify, intercept, and destroy or negate the effectiveness of enemy aircraft or missiles before launch or while in flight so as to protect U.S. and coalition forces, people, and geopolitical assets.

#### WS.MD.1.1 Purpose

This JTA subdomain annex identifies standards for missile defense systems. This version is focused primarily on active ballistic missile defense, with the intent of expanding this subdomain annex in the future.

#### WS.MD.1.2 Background

The following documents provide useful background information regarding missile defense (sorted by title), with particular emphasis on ballistic missile defense:

- ☐ *Draft Ballistic Missile Defense (BMD) Command, Control, and Communications (C3) Operational Requirements Document (ORD) (U)*, Air Force Space Command, AFSPC002-97-1, Working Draft, 1 April 1998, Secret (U.S. Only).
- ☐ *Battle Management Concept for Joint Theater Air and Missile Defense Operations, Joint Theater Air and Missile Defense Organization (JTAMDO)*, Final Draft, 11 September 1997.
- ☐ *BMD C3 ORD Requirements Incorporations into the NMD ORD (U)*, Air Force Space Command, 30 July 1998, Secret.
- ☐ *Capstone Theater Missile Defense (TMD) Cost and Operational Effectiveness Analysis (COEA)*, BMDO, 1996. Doctrine for Joint Theater Missile Defense. Joint Pub 3-01.5. February 22, 1996.
- ☐ *FY96 Analysis Of The Ballistic Missile Defense Interoperability Standards*, Fife et al., IDA-P-3277, Alexandria, VA: Institute For Defense Analyses.
- ☐ *JTAMD Mission Area Assessment (U)*, DoD J8, Draft, October 30, 1997, Secret. (Note that this document combines the capstone TMD COEA, TAD, and information on land attack cruise missiles).
- ☐ *National Ballistic Missile Defense (NBMD) Capstone Requirements Document (CRD) (U)*, U.S. Space Command, August 24, 1996, Secret (Release Can-US).
- ☐ *NMD Capability 1 and Capability 2 System Requirements Document (U)*, TRW Inc., May 6, 1998, BMC3 SE&I, Rosslyn, VA: TRW, Secret.

- *NMD Capability 2 System Requirements Document (U)*, TRW Inc., April 4, 1997, BMC3 SE&I, Rosslyn, VA: TRW, Secret.
- *Operational Requirements Document (ORD) for National Missile Defense (NMD) (U)*, draft, US Army Space and Strategic Defense Command, March 10, 1997, Secret.
- *Theater Air and Missile Defense Architecture for Joint Force Operations*, Bean et al., June 1997, MP 97W 105.
- *Theater Air and Missile Defense Master Plan*, September 1997, JTAMDO. POET control number MCNEIL 000396/97.
- *Theater Missile Defense (TMD) Command and Control (C2) Plan*, August 1996.
- *USACOM TMD Capstone Requirements Document (CRD) (U)*, U. S. Atlantic Command, Final Draft, March 2, 1998, Secret.
- *Command, Control, Communications, Computers, and Intelligence (C4I) Joint Tactical Data Link Management Plan*, Department of Defense, June 6, 1996.

### **WS.MD.1.3 Subdomain Description**

For a description of this subdomain, see the background material in Section WS.MD.1.2. As discussed in some of these documents, there is a need for interoperability between Theater Missile Defense (TMD) family of systems (FoS), National Missile Defense (NMD) components, and other systems such as Space-based Infrared System (SBIRS) to support their missions. Such interoperability would need to support activities such as minimum cueing, track exchange, and weapon coordination. This requires standards, e.g., in how such information should be transferred and on geospatial values. This JTA subdomain specifies such standards to support interoperability to fulfill missile-defense mission objectives.

### **WS.MD.1.4 Scope and Applicability**

The scope of this subdomain annex is the entire domain of missile defense (as defined in the overview above). However, the standards listed within this version of the subdomain annex solely address support for active and passive defense<sup>1</sup> against theater and strategic ballistic missiles in flight, as a first step in evolving a comprehensive and complete set of standards for all missile defense systems. It is acknowledged that this evolution will require interaction with many communities to resolve standardization issues.

### **WS.MD.1.5 Technical Reference Model (TRM)**

Missile defense systems typically include one or more sensors, one or more weapons, and a communication infrastructure all coordinated by a Battle Management Command, Control, and Communications (BMC3) system (which also coordinates with external systems). At this time there is ongoing work to develop a tailored reference model and technical architecture profile for missile defense based on the DoD TRM.

---

1. Missile defense can be viewed as having four pillars: active defense, attack operations, passive defense, and an overarching BMC4I. In this context, active defense is direct defensive action taken to nullify or reduce the effectiveness of hostile air action, such as the use of missile defense weapons. Attack operations includes activities such as directly attacking missile launchers. Passive defense is all other measures taken to minimize the effectiveness of a specific hostile air action, including deception and dispersion. The overarching BMC4I directs and coordinates all these activities.

### **WS.MD.1.6 Subdomain Annex Organization**

This subdomain annex is divided into three sections: (1) the Overview in WS.MD.1; (2) the missile defense mandates and emerging standards additional to those in the JTA Core in WS.MD.2; and (3) the Subdomain-Specific Service Areas and Interfaces in WS.MD.3. WS.MD.2 follows the JTA Section 2 service area structure. The structure of WS.MD.3 will evolve as missile defense-specific service areas are identified and a common structure is coordinated among the other annexes.

### **WS.MD.2 Additions to the JTA Core**

#### **WS.MD.2.1 Introduction**

This section identifies standards for the Missile Defense Subdomain Annex that are additional to standards in the JTA Core.

#### **WS.MD.2.2 Information-Processing Standards**

##### **WS.MD.2.2.1 Introduction**

##### **WS.MD.2.2.2 Mandated Standards**

There are no mandated standards in this section.

##### **WS.MD.2.2.3 Emerging Standards**

###### **WS.MD.2.2.3.1 Navigation Standard**

The following standard may be mandated by the JTA for ballistic missile defense systems to ensure that navigation-related data (e.g., position, velocity, and time) can be shared and properly used between missile defense systems. This standard is consistent with, and extends the mandates in, the JTA Core (in particular World Geodetic System [WGS]-84 and Coordinated Universal Time [UTC] U.S. Naval Observatory [USNO]). It provides a profile of these mandates for missile defense to reduce differences between missile systems, e.g., it requires all missile defense systems to use a specific standard method for computing the Earth's geocentric radius, identifies specific models for approximating elevation and geoid height, and identifies how systems shall determine positions (consistent with JTA standards) in a way that they will agree on those values. It also provides guidance for implementation, increasing the likelihood that these systems will be interoperable. There are ongoing efforts to examine updating this emerging standard:

- [BMD-P-SD-92-000002-A](#), Ballistic Missile Defense (BMD) Navigation Standard, 23 June 1993, Ballistic Missile Defense Organization.

###### **WS.MD.2.2.3.2 Real-Time Defense Information Infrastructure Common Operating Environment (DII COE)**

Missile defense systems are, by their nature, a combination of hard and soft real-time systems. There is ongoing work to incorporate some soft real-time capabilities into the DII COE. The applicability of these capabilities is being evaluated.

**WS.MD.2.3 Information-Transfer Standards****WS.MD.2.3.1 Introduction****WS.MD.2.3.2 Mandated Standards****WS.MD.2.3.2.1 Time Synchronization**


The time basis for NMD and TMD operations shall be UTC (USNO) as disseminated by the Navstar Global Positioning System (GPS). The GPS standards identified in [Section 2.3.2.1.5](#) are mandated.

**WS.MD.2.3.3 Emerging Standards**

There are no emerging standards for this section.

**WS.MD.2.4 Information-Modeling, Metadata, and Information-Exchange Standards****WS.MD.2.4.1 Introduction****WS.MD.2.4.2 Mandated Standards****WS.MD.2.4.2.1 Bit-Oriented Formatted Messages**

The Tactical Digital Information Link (TADIL)-J/Link-16 message format is mandated as a mobile interoperable communication message format on all transportable missile defense systems, and for Theater Air Missile Defense (TAMD) systems that must interoperate with them. This is specified by MIL-STD-6016A combined with all accepted Interface Change Proposals (ICPs) awaiting incorporation. Although this standard is in the JTA Core, this annex adds the additional requirement that this standard must be implemented for such systems and cannot be replaced with the alternatives listed in the JTA Core. Such systems may also support other message formats. The following standard is mandated for transportable missile defense systems.

- [MIL-STD-6016A](#), Tactical Digital Information Link (TADIL) J Message Standard, 30 April 1999. 

**WS.MD.2.4.3 Emerging Standards**

The Missile Defense Data Standardization Group is working to merge the Data Element Definitions (DEDs) developed for TMD, NMD, and the Joint Theater Air Missile Defense Organization (JTAMDO).

The NMD program is in the process of selecting communication mechanisms. An Integrated Product Team (IPT) formed to study the issue has recommended that NMD use a Variable Message Format (VMF)-based message set.

Ballistic Missile Defense Organization (BMDO) has formed the “Time and Geospatial Working Group” (TGWG) to identify additional time and geospatial issues and to develop cross-system resolutions of those issues.

**WS.MD.2.5 Human-Computer Interface Standards****WS.MD.2.5.1 Introduction****WS.MD.2.5.2 Mandated Standards****WS.MD.2.5.2.1 Symbology**

Operations can be identified as being engagement operations or force operations. Engagement operations are real-time or near-real-time operations involved in control of the engagement, providing for the acquisition, tracking, identification, management and dissemination of air track information, the alerting of the force to the presence of non-friendly aircraft, the cueing of weapon systems to engageable aircraft in their area of interest and for the distribution of battle management information. Engagement operations are typically supported by TADIL data links. Force operations are involved in the support of the operation, providing for the allocation of air defense resources, the assignment of operations and priorities of defended assets, and the coordination and implementation of firing restrictions and rules of engagement. Typically, force operations are non-real-time or near-real-time.

The use of military standards such as MIL-STD-1477B for engagement operations symbology is encouraged, but no symbology standard for engagement operations is mandated by the JTA. The following standard is mandated for the display of common warfighting symbology for force operations:

- [MIL-STD-2525B](#), Common Warfighting Symbology, 30 January 1999. 

**WS.MD.2.6 Information-Security Standards**

There are no mandates or emerging standards for this section.

**WS.MD.3 Subdomain-Specific Service Areas and Interfaces**

There are no subdomain-specific service areas and interfaces identified at this time.

Page intentionally left blank.

## **Missile Systems Subdomain Annex for the Weapon Systems Domain**

### **WS.MS.1 Subdomain Overview**

A weapon system is a combination of one or more weapons with all related equipment, materials, services, personnel and means of delivery and deployment (if applicable) required for self-sufficiency.

Systems covered within the Missile Systems subdomain include Strategic and Theater Ballistic Missile Systems; Cruise Missile Systems; and rocket and missile systems used in diverse Battlefield Functional Areas including Fire Support, Close Combat, and Special Operations. Note that Missiles that are components of U.S. National and Theater Missile Defense systems are not included in the Missile Systems Subdomain, but instead are covered in the Missile Defense subdomain Annex. The diversity of missions that missile systems must perform induces a variety of system solutions including shoulder-fired, line-of-sight direct fire, and non-line-of-sight indirect fire missiles and rockets; ground-launched, air-launched, and ship-launched or submarine-launched cruise missiles; surface-to-surface, surface-to-air, ship-to-ship, air-to-air, and air-to-ground missiles; and Inter-Continental, Intermediate Range, and Submarine-Launched Ballistic Missiles (ICBM, IRBM, and SLBM respectively). Broadly, Missile Systems may be described in terms of the following subsystems: 1) missile, 2) launcher, 3) C3I (including fire control or battle management), and, in some cases, 4) sensor. These subsystems are designed and developed to deploy and function as a single Missile System in which all the subsystems are, to a certain degree, interdependent. The Missile System may have all of the subsystems collocated or distributed. For example, a sensing device may be onboard a missile or on the ground, in the air, or in space providing information to the missile via a high-performance data link. Also, a missile's fire control or battle management system may be collocated in the launch vehicle or geographically separate from the launch vehicle, but connected through a direct (physical), line-of-sight, or non-line-of-sight communications link.

#### **WS.MS.1.1 Purpose**

This subdomain builds on the Weapon Systems Domain Annex by identifying Missile Systems subdomain-specific standards to include information standards and analogous standards applicable to Missile Systems (see [Section 1.2.2](#) for relationships between core, domain, and subdomain standards).

#### **WS.MS.1.2 Background**

The standards in this subdomain are based on the ongoing work of the Joint weapons community.

#### **WS.MS.1.3 Subdomain Description**

For a description of this subdomain, see WS.MS.1. For the purpose of this subdomain, Missile Systems include all offensive missile and rocket systems.

Note: Missiles that are components of U.S. National and Theater Missile Defense systems are not included in the Missile Systems Subdomain annex, but instead are covered in the Missile Defense Subdomain Annex.

#### **WS.MS.1.4 Scope and Applicability**

The scope of this subdomain annex is all DoD Missile Systems (as defined in WS.MS.1 and WS.MS.1.3). However, the standards listed in this version of the annex currently address only Army Missile and Rocket Systems. This is a first step in evolving a comprehensive and complete set of standards for Missile Systems for all the Services. It is acknowledged that this evolution will require extensive interaction with many communities to resolve standardization issues.

#### **WS.MS.1.5 Technical Reference Model**

The Technical Reference Model used in this subdomain is the DoD TRM described in the Weapon Systems Domain Annex.

#### **WS.MS.1.6 Subdomain Annex Organization**

This subdomain annex is divided into three sections: the Subdomain Overview in WS.MS.1, the Subdomain-Specific Standards in WS.MS.2, and the Subdomain-Specific Service Areas and Interfaces in WS.MS.3. WS.MS.2 follows the JTA Section 2.2 service area structure. The structure of WS.MS.3 follows the structure of Section 3 of the Weapon Systems Domain Annex.

### **WS.MS.2 Additions to JTA Core**

#### **WS.MS.2.1 Introduction**

This section identifies the subdomain-specific mandated and emerging standards for the Missile Systems Subdomain Annex.

#### **WS.MS.2.2 Information-Processing Standards**

Currently, there are no subdomain-specific mandated or emerging standards in this section.

#### **WS.MS.2.3 Information-Transfer Standards**

Currently, there are no subdomain-specific mandated or emerging standards in this section.

#### **WS.MS.2.4 Information-Modeling and Data Exchange Standards**

Currently, there are no subdomain-specific mandated or emerging standards in this section.

#### **WS.MS.2.5 Human-Computer Interface Standards**

Currently, there are no subdomain-specific mandated or emerging standards in this section.

#### **WS.MS.2.6 Information-Security Standards**

Currently, there are no subdomain-specific mandated or emerging standards in this section.



### **WS.MS.3 Subdomain-Specific Services and Interfaces**

#### **WS.MS.3.1 Introduction**

The GOA Framework depicted by the DoD TRM Interfaces View of Figure F-2 provides sufficient fidelity for identifying classes of interfaces to apply open-systems interface standards to the design of real-time and embedded hardware/software systems. The Framework also facilitates the identification of critical functions and interfaces within the real-time and embedded computing systems of the Missile Systems Subdomain. This section provides a common framework identifying mandated and emerging embedded computing interface standards associated with the logical and direct interface classes defined for the layers depicted in the Interfaces View of the DoD TRM.

#### **WS.MS.3.2 Application Software Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards in this section.

#### **WS.MS.3.3 System Services Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards in this section.

#### **WS.MS.3.4 Resource Access Services Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards in this section.

#### **WS.MS.3.5 Physical Resources Layer Interfaces**

This section identifies

- ☐ The interface standards that provide the requirements for establishing a data interchange interface between Physical Resources and enable bus or communications link boards to address their peers in another node or system, and
- ☐ The interface standards that support the direct connections between Physical Resources, such as those needed to enable buses and communications links to address processors or those needed to enable processors to address memory registers.

##### **WS.MS.3.5.1 Introduction**


##### **WS.MS.3.5.2 Mandated Standards**

Currently, there are no subdomain-specific mandated standards in this section.

##### **WS.MS.3.5.3 Emerging Standards**

The following standards are used across multiple Missile Systems and their platforms and are expected to see continued use in the development of future Missile Systems and upgrades to existing systems.

The following standard is emerging for applications requiring digital, command/response, time division multiplexing techniques, and defines the data bus line and its interface electronics, the concept of operation and information flow on the multiplex data bus, and the electrical and functional formats to be employed.

- [MIL-STD-1553B](#), Interface Standard for Digital Time Division Command/Response Multiplex Data Bus, 21 September 1978, with Notice of Change 1, 12 February 1980, Notice of Change 2, 8 September 1986, Notice of Change 3, 31 January 1993, and Notice of Change 4, 15 January 1996. 

The following industrial bus standard is emerging for applications requiring high-speed data transfer, rugged construction, excellent shock and vibration resistance, Plug'n Play capability, and the desire for future hot-swappable support.

- [PCI Industrial Computer Manufacturer's Group \(PICMG\)](#): Compact PCI Specification, R2.1, September 1997.

For more information regarding the standard, visit the following website:

**<<http://www.picmg.org/gcompactpci.htm>>**. 

The following standard is emerging for applications that require an efficient peer-to-peer I/O bus capable of handling up to 16 devices, including one or more hosts. This standard includes command sets for magnetic and optical disks, tapes, printers, processors, CD-ROMs, scanners, medium changers, and communications devices.

- [ANSI X3.131](#), Information Systems - Small Computer Systems Interface - 2 (SCSI-2), 1994. 

The following standard is emerging for applications requiring hot-swappable peripherals that add memory, mass storage, and I/O capabilities to computers in a rugged, compact form factor.

- [Personal Computer Memory Card International Association \(PCMCIA\)](#), PC Card Standard, March 1997.

For more information regarding the standard, visit the following website:

**<<http://www.pc-card.com/pccardstandard.htm>>**. 

The following standard is considered emerging and is applicable, but not limited, to the VMEbus standard, an internal interconnect (backplane) bus intended for connecting processing elements to their immediate fundamental resources, and is cited to facilitate mechanical interchangeability of conduction-cooled circuit card assemblies in a format suitable for military and rugged applications and to ensure their compatibility with the commercial, double-height 16 mm, Eurocard chassis.

- [IEEE 1101.2](#), Standard for Mechanical Core Specifications for Conduction-Cooled Eurocards (ANSI), 1992.

The following standards are also considered to be emerging:

- [SAE J 1850](#), Class B Data Communication Network Interface, 1 July 1995.
- [ANSI/VITA 1](#), VME64 Specification, 1994.

## **Munition Systems Subdomain Annex for the Weapon Systems Domain**

### **WS.MUS.1 Subdomain Overview**

A weapon system is a combination of one or more weapons with all related equipment, materials, services, personnel, and means of delivery and deployment (if applicable) required for self-sufficiency.

Within DoD's inventory of weapon systems, many systems do not fit within the parameters of the well-defined Weapon Systems subdomains of Missile Defense Systems, Soldier Systems, Ground Vehicle Systems, or Aviation Systems. These non-mobile, transportable, weapon systems include, but are not limited to, munitions, munitions integrated with sensors, control stations, combat communication systems, repeaters, and gateways. The Munition Systems subdomain includes any system or subsystem that contains an explosive warhead (such as dumb, smart, and precision bombs, or mines and artillery shells) and that detects, classifies, identifies, intercepts, and destroys or negates the effectiveness of the enemy.

#### **WS.MUS.1.1 Purpose**

This subdomain builds on Weapon Systems Domain Annex by identifying Munition Systems subdomain-specific standards including information standards and analogous standards applicable to Munition Systems (see Section 1.2.3 for relationships between core, domain, and subdomain standards).

The primary purpose of establishing a subdomain is to ensure interoperability, defined as the ability of two or more systems or components to exchange data and use information (IEEE STD 610.12) within the family of systems that constitute the subdomain.

This version is focused solely on Landmine Munition Systems, with the intent of expanding this subdomain annex in the future.

#### **WS.MUS.1.2 Background**

The standards in this subdomain are based on the work performed by the weapons community.

#### **WS.MUS.1.3 Subdomain Description**

Munition Systems included in this subdomain are those whose parameters cannot be accurately described within the parameters of the well-defined Weapon Systems subdomains of Missile Systems, Soldier Systems, Ground Vehicle Systems, or Aviation Systems. These Munition Systems are primarily unattended and autonomous, with unique environmental and operational mission requirements (e.g., positive systems control and management, long-range remote communications, physical packages and platforms, security and survivability, performance, safety) that are not common to other subdomains. Their system elements may include combinations of autonomous and remotely commanded munitions with or without the following: onboard sensors, networked combat sensors and/or sensor suites, and control stations with integral combat communications, including combat communication systems, information-processing gateways, and repeaters.

**WS.MUS.1.4 Scope and Applicability**

The scope of this subdomain annex is the entire Munition Systems subdomain (as defined in the overview and subdomain description above). However, the standards listed within this version of the subdomain annex solely address support for Landmine Munition Systems, as a first step in evolving a comprehensive and complete set of standards for Munition Systems. It is acknowledged that this evolution will require interaction with many communities to resolve standardization issues.

**WS.MUS.1.5 Technical Reference Model**

The Technical Reference Model used in this subdomain is the DoD Technical Reference Model (TRM) described in the Weapon Systems Domain Annex.

**WS.MUS.1.6 Subdomain Annex Organization**

This subdomain annex is divided into three sections: the Subdomain Overview in WS.MUS.1, the subdomain-specific standards in WS.MUS.2, and the subdomain-specific services and Interfaces in WS.MUS.3. WS.MUS.2 follows the JTA Section 2 service area structure. The structure of WS.MUS.3 follows the structure of Weapon Systems Domain Annex WS.3.

**WS.MUS.2 Additions to the JTA Core****WS.MUS.2.1 Introduction**

This section identifies the subdomain-specific mandated and emerging standards for the Munition Systems Subdomain Annex.

**WS.MUS.2.2 Information-Processing Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.2.2.1 Introduction****WS.MUS.2.2.2 Mandated Standards**

Currently, there are no subdomain-specific mandated standards in this section.

**WS.MUS.2.2.3 Emerging Standards**

Currently, there are no subdomain-specific emerging standards in this section.

**WS.MUS.2.3 Information-Transfer Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.2.5 Human-Computer Interface Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.2.6 Information-Security Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.3 Subdomain-Specific Services and Interfaces****WS.MUS.3.1 Introduction**

The GOA Framework depicted by the DoD TRM Interfaces View of Figure WS-2 provides sufficient fidelity for identifying classes of interfaces to apply open-systems interface standards to the design of real-time and embedded-hardware/software systems. The Framework also facilitates the identification of critical functions and interfaces within the real-time and embedded-computing systems of the Munition Systems.

This section provides a common framework identifying mandated and emerging embedded-computing interface standards associated with the logical and direct interface classes defined for the layers depicted in the DoD TRM.

Only those layers of the DoD TRM that have subdomain-specific mandated or emerging standards identified are addressed in this section.

**WS.MUS.3.2 Application Software Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.3.3 System Services Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.3.4 Resource Access Services Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Munition Systems Subdomain Annex.

**WS.MUS.3.5 Physical Resources Layer Interfaces**

This section identifies

- ☐ The interface standards that provide the requirements for establishing a data interchange interface between Physical Resources and enable bus or communications link boards to address their peers in another node or system, and
- ☐ The interface standards that support the direct connections between Physical Resources, such as those needed to enable buses and communications links to address processors or those needed to enable processors to address memory registers.

**WS.MUS.3.5.1 Introduction****WS.MUS.3.5.2 Mandated Standards**

The following standard is mandated for applications that require an efficient peer-to-peer I/O bus capable of handling up to 16 devices, including one or more hosts. This standard includes command sets for magnetic and optical disks, tapes, printers, processors, CD-ROMs, scanners, medium changers, and communications devices.

- [ANSI X3.131](#), Information Systems – Small Computer Systems Interface – 2 (SCSI-2), 1994.

The following industrial bus standard is mandated for applications requiring high-speed data transfer, rugged construction, excellent shock and vibration resistance, Plug'n Play capability, and the desire for future hot-swappable support.

- [PCI Industrial Computer Manufacturer's Group PICMG](#): Compact PCI Specification, R2.1, September 1997.

For more information regarding the standard, visit the following web site:

<<http://www.picmg.org/gcompactpci.htm>>. 

The following standard is mandated for applications requiring hot-swappable peripherals that add memory, mass storage, and I/O capabilities to computers in a rugged, compact form factor.

- [Personal Computer Memory Card International Association \(PCMCIA\)](#), PC Card Standard, March 1997.

For more information regarding the standard, visit the following web site:

<<http://www.pc-card.com/pccardstandard.htm>>. 

**WS.MUS.3.5.3 Emerging Standards**

Currently, there are no subdomain-specific emerging standards identified for this section of the Munition Systems Subdomain Annex.

## **Soldier Systems Subdomain Annex for the Weapon Systems Domain Annex**

### **WS.SS.1 Subdomain Overview**

A weapon system is a combination of one or more weapons with all related equipment, materials, services, personnel, and means of delivery and deployment (if applicable) required for self-sufficiency.

Systems covered within the Soldier Systems subdomain include any system or subsystem integrating target location, target identification, target acquisition, enhanced survivability, navigation, position location, enhanced mobility, and command-and-control into a system worn or carried by an individual soldier in performance of assigned duties.

#### **WS.SS.1.1 Purpose**

This subdomain builds on the Weapon Systems Domain Annex by identifying Soldier Systems subdomain-specific standards including information standards and analogous standards applicable to Soldier Systems (see [Section 1.2.2](#) for relationships between core, domain, and subdomain standards).

#### **WS.SS.1.2 Background**

The standards in this subdomain are based on the work performed by the weapons community.

The following documents provide useful background information regarding soldier systems with particular emphasis on fighting systems:

- ☐ The Soldier Integrated Protective Ensemble (SIPE), Army Concept Technology Demonstration (ACTD), U.S. Army Natick Research, Development and Engineering Command, Sep 1991.
- ☐ The Enhanced Integrated Soldier System (TEISS), Army Science Board Study, 30 March 1993.
- ☐ The Land Warrior Operational Requirements Document (ORD), HQ US Army Training and Doctrine Command, 17 March 1994.

#### **WS.SS.1.3 Subdomain Description**

The systems of this subdomain integrate weapons, target detection, location and warning sensors, ballistic and environmental protective equipment, positioning and location equipment, helmet-mounted displays, load carrying, sustainment and special-purpose equipment onto the soldier as the platform. The systems are functionally integrated using an embedded computer with multiple pieces of radio communications equipment to enhance command-and-control and combat effectiveness. These capabilities are achieved through integration of Government-Furnished Equipment and the use of commercial-off-the-shelf technologies to meet the key performance parameters of soldier systems. These systems are optimized to minimize the total weight carried by the individual while minimizing the cognitive overload. These systems are required to meet the tactical battlefield environmental characteristics including delivery by parachute while worn by the

soldier. All systems are self-contained, man-packed and battery-powered. Systems do not rely on any fixed infrastructure to meet the operational performance requirements.

#### **WS.SS.1.4 Scope and Applicability**

The scope of this subdomain annex is the entire Soldier Systems subdomain as defined in Section WS.SS.1 above.

#### **WS.SS.1.5 Technical Reference Model**

The Technical Reference Model used in this subdomain is the DoD Technical Reference Model (TRM) described in the Weapon Systems Domain Annex.

#### **WS.SS.1.6 Subdomain Annex Organization**

This subdomain annex is divided into four sections: the Subdomain Overview in WS.SS.1, the additions to the JTA Core in WS.SS.2, the subdomain-specific standards in WS.SS.3, and the subdomain-specific services and interfaces in WS.SS.4. WS.SS.2 follows the JTA Section 3 service area structure. The structure of WS.SS.4 follows the structure of Weapon Systems Domain Annex WS.3.

### **WS.SS.2 Subdomain-Specific Standards**

#### **WS.SS.2.1 Introduction**

This section identifies the subdomain-specific mandated and emerging standards for the Soldier Systems Subdomain Annex.

#### **WS.SS.2.2 Information-Processing Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.

#### **WS.SS.2.3 Information-Transfer Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.

#### **WS.SS.2.4 Information-Modeling, Metadata, and Information-Exchange Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.

#### **WS.SS.2.5 Human-Computer Interface Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.

#### **WS.SS.2.6 Information-Security Standards**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.



### **WS.SS.3 Subdomain-Specific Services and Interfaces**

#### **WS.SS.3.1 Introduction**

The GOA Framework depicted by the DoD TRM Interfaces View of Figure WS-2 provides sufficient fidelity for identifying classes of interfaces to apply open-systems interface standards to the design of real-time and embedded hardware/software systems. The Framework also facilitates the identification of critical functions and interfaces within the real-time and embedded-computing systems of the Soldier Systems subdomain.

This section provides a common framework identifying mandated and emerging embedded-computing interface standards associated with the logical and direct interface classes defined for the layers depicted in the DoD TRM.

Only those layers of the DoD TRM that have subdomain-specific mandated or emerging standards identified are addressed in this section.

#### **WS.SS.3.2 Application Software Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.

#### **WS.SS.3.3 System Services Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.

#### **WS.SS.3.4 Resource Access Services Layer Interfaces**

Currently, there are no subdomain-specific mandated or emerging standards identified for this section of the Soldier Systems Subdomain Annex.

#### **WS.SS.3.5 Physical Resources Layer Interfaces**

This section identifies:

- ☐ The interface standards that provide the requirements for establishing a data interchange interface between Physical Resources and enable bus or communications link boards to address their peers in another node or system, and
- ☐ The interface standards that support the direct connections between Physical Resources, such as those needed to enable buses and communications links to address processors or needed to enable processors to address memory registers.

##### **WS.SS.3.5.1 Introduction**

##### **WS.SS.3.5.2 Mandated Standards**

The unique mission requirements of Soldier Systems dictate system and environmental constraints (e.g., long battery life, low power consumption, small size, light-weight, shock resistant, critical EMI-shielded constraints, all-weather operation, use with NBC protective gear) that make current the state-of-the-art digital and/or color video equipment unsuitable for use with Soldier Systems. Therefore, the following standards are mandated for soldier systems employing analog and/or monochrome video technology:

- [EIA 170](#), Electrical Performance Standards – Monochrome Television Studio Facilities, November 1957.
- [SMPTE 170M](#), Television – Composite Analog Video Signal – NTSC for Studio Applications, 1994.

#### **WS.SS.3.5.3 Emerging Standards**

Currently, there are no subdomain-specific emerging standards identified for this section of the Soldier Systems Subdomain Annex.

## Appendix A: Abbreviations and Acronyms

Note: Multiple acronyms are sometimes shown for the same term where the different acronyms are used in the document. For example, the text of the document consistently uses “Mbits/s” for “Megabits per second,” but the abbreviation “Mbps” is used in the titles of some standards.

<b>AAL</b>	ATM Adaptation Layer
<b>ABBET</b>	A Broad-Based Environment for Test
<b>ABOR</b>	Abort
<b>ACC</b>	Architecture Coordination Council
<b>ACP</b>	Allied Communication Publication
<b>ACTD</b>	Advanced Concept Technology Demonstration
<b>ADE</b>	Application Development Environment
<b>AES</b>	Application Environment Specification
<b>AES3</b>	Audio Engineering Society 3
<b>AFP</b>	Adapter Function and Parametric Data Interface
<b>AH</b>	Authentication Header
<b>AI-ESTATE</b>	Artificial Intelligence-Exchange and Services Tie to All Test Environments
<b>AIM</b>	Advanced Information Management
<b>AITI</b>	Automated Interchange of Technical Information
<b>AIMS</b>	Adopted Information Technology Standards
<b>ALE</b>	Automated Link Establishment
<b>ALSP</b>	Aggregate-Level Simulation Protocol
<b>AMB</b>	ATS Management Board
<b>ANSI</b>	American National Standards Institute
<b>AOR</b>	Area of Responsibility
<b>API</b>	Application Program Interface
<b>AR</b>	Airborne Reconnaissance
<b>ARI</b>	ATS Research and Development Integrated Product Team
<b>ASD</b>	Assistant Secretary of Defense
<b>ASD C3I</b>	Assistant Secretary of Defense for Command, Control, Communications, and Intelligence
<b>ATA</b>	Army Technical Architecture

<b>ATE</b>	Automated Test Equipment
<b>ATM</b>	Asynchronous Transfer Mode
<b>ATPG</b>	Automatic Test Program Generator
<b>ATS</b>	Automatic Test Systems
<b>AV</b>	Air Vehicle; Aviation
<b>BER</b>	Bit Error Rate
<b>BGP</b>	Border Gateway Protocol
<b>BIIF</b>	Basic Image Interchange Format
<b>bits/s</b>	Bits per second
<b>B-ISDN</b>	Broadband-Integrated Services Digital Network
<b>BM</b>	Ballistic Missile
<b>BMC3</b>	Ballistic Missile Command, Control, and Communications
<b>BMD</b>	Ballistic Missile Defense
<b>BMDO</b>	Ballistic Missile Defense Organization
<b>BOOTP</b>	Bootstrap Protocol
<b>bps</b>	Bits Per Second
<b>BRI</b>	Basic Rate Interface
<b>BUFR</b>	Binary Universal Format for Representation
<b>C/S/A</b>	CINCs/Services/Agencies
<b>C2</b>	Command and Control
<b>C2CDM</b>	Command and Control Core Data Model
<b>C3I</b>	Command, Control, Communications, and Intelligence
<b>C4I</b>	Command, Control, Communications, Computers, and Intelligence
<b>C4ISR</b>	Command, Control, Communications, Computers, Intelligence, Surveillance, and Reconnaissance
<b>CAC</b>	Computer Asset Controller
<b>CADRG</b>	Compressed ARC Digitized Raster Graphics
<b>CAE</b>	Common Application Environment
<b>CAF</b>	C4I Architecture Framework
<b>CALS</b>	Continuous Acquisition and Life-Cycle Support

<b>CARS</b>	Contingency Airborne Reconnaissance System
<b>CBC</b>	Cipher Block Chaining
<b>CBR</b>	Constant Bit Rate
<b>CBS</b>	Commission for Basic Systems
<b>CBW</b>	Chemical and Biological Weapons
<b>CCB</b>	Change Control Board
<b>CCITT</b>	International Telegraph & Telephone Consultative Committee (now ITU-T)
<b>CDE</b>	Common Desktop Environment
<b>CDMA</b>	Code Division Multiple Access
<b>CD-ROM</b>	Compact Disk-Read Only Memory
<b>CE</b>	Controlled Extensions
<b>CFITS</b>	Center for Information Technology Standards
<b>CGI</b>	Computer Graphics Interface
<b>CGM</b>	Computer Graphics Metafile
<b>CHAP</b>	Challenge Handshake Authentication Protocol
<b>CI</b>	Critical Interface
<b>CIB</b>	Controlled Image Base
<b>CINC</b>	Commander In Chief
<b>CIPSO</b>	Common Internet Protocol Security Options
<b>CJCS</b>	Chairman of the Joint Chiefs of Staff
<b>CJCSI</b>	Chairman of the Joint Chiefs of Staff Instruction
<b>CLI</b>	Call-Level Interface
<b>CM</b>	Configuration Management
<b>CMIP</b>	Common Management Information Protocol
<b>CMIS</b>	Common Management Information Services
<b>CMMS</b>	Conceptual Models of the Mission Space
<b>CNR</b>	Combat Net Radio
<b>COE</b>	Common Operating Environment
<b>COEA</b>	Cost and Operational Effectiveness Analysis
<b>COES</b>	Committee on Open Electronic Standards
<b>COM</b>	Common Object Model; Component Object Model
<b>CORBA</b>	Common Object Request Broker Architecture

<b>COTS</b>	Commercial Off-the-Shelf
<b>CRD</b>	Capstone Requirements Document
<b>CS</b>	Combat Support
<b>CSMA/CD</b>	Carrier Sense Multiple Access with Collision Detection
<b>CSP</b>	Common Security Protocol
<b>CTRS</b>	Conventional Terrestrial Reference System
<b>CXE</b>	Computer to External Environments Interface
<b>DAA</b>	Designated Approving Authority
<b>DAMA</b>	Demand Assigned Multiple Access
<b>DAP</b>	Directory Access Protocol
<b>DARP</b>	Defense Airborne Reconnaissance Program
<b>DARPA</b>	Defense Advanced Research Projects Agency
<b>DAT</b>	Digital Audio Tape
<b>DBMS</b>	Database Management System
<b>DCA</b>	Defense Communications Agency (now DISA)
<b>DCE</b>	Distributed Computing Environment
<b>DCOM</b>	Distributed Component Object Model
<b>DDDS</b>	Defense Data Dictionary System
<b>DDM</b>	DoD Data Model
<b>DDNS</b>	Dynamic Domain Name System
<b>DDRS</b>	Defense Data Repository System
<b>DED</b>	Data Element Definitions
<b>DFC</b>	Diagnostic Flow Charts
<b>DGIWG</b>	Digital Geographic Information Working Group
<b>DGSA</b>	DoD Goal Security Architecture
<b>DHCP</b>	Dynamic Host Configuration Protocol
<b>DIA</b>	Defense Intelligence Agency; Diagnostic Processing Interface Protocol (ATS Subdomain Annex)
<b>DICOM</b>	Digital Imaging and Communication In Medicine
<b>DIF</b>	Data Interchange Format
<b>DIGEST</b>	Digital Geographic Information Exchange Standard

<b>DII</b>	Defense Information Infrastructure
<b>DIS</b>	Distributed Interactive Simulation; Draft International Standard
<b>DISA</b>	Defense Information Systems Agency (formerly Defense Communications Agency [DCA])
<b>DISN</b>	Defense Information System Network
<b>DLA</b>	Defense Logistics Agency
<b>DLWG</b>	Data Link Working Group
<b>DMS</b>	Defense Message System
<b>DMSO</b>	Defense Modeling and Simulation Office
<b>DMTD</b>	Digital Message Transfer Device
<b>DNC</b>	Digital Nautical Chart
<b>DNS</b>	Domain Name System
<b>DoD</b>	Department of Defense
<b>DoDD</b>	DoD Directive
<b>DoDIIS</b>	DoD Intelligence Information Systems
<b>DoDISS</b>	DoD Index of Specifications and Standards
<b>DoDSSP</b>	DoD Single Stock Point
<b>DOI</b>	Domain of Interpretation
<b>DPPDB</b>	Digital Point Positioning Data Base
<b>DRV</b>	Instrument Driver Application Programming Interface
<b>DSA</b>	Digital Signature Algorithm
<b>DSIC</b>	Defense Standards Improvement Council
<b>DSN</b>	Defense Switched Network
<b>DSP</b>	Defense Standardization Program
<b>DSS1</b>	Digital Subscriber Signaling System No 1
<b>DSSS</b>	Direct Sequence Spread Spectrum
<b>DSSSL</b>	Document Style and Semantics Specification Language
<b>DTD</b>	Document Type Definition
<b>DTF</b>	Digital Test Data Format
<b>DTIF</b>	Digital Test Interchange Format
<b>DTOP</b>	Digital Topographic Data

<b>EB</b>	Electronic Business
<b>EC</b>	Electronic Commerce
<b>E/O</b>	Electro-optical
<b>EAO</b>	Executive Agent Office
<b>ECAPMO</b>	Electronic Commerce Acquisition Program Management Office
<b>EDI</b>	Electronic Data Interchange
<b>EDIF</b>	Electronic Data Interchange Format
<b>EDISMC</b>	EDI Standards Management Committee
<b>EEI</b>	External Environment Interface
<b>EHF</b>	Extremely High Frequency; Extra High Frequency
<b>EIA</b>	Electronics Industries Association
<b>E-MAIL</b>	Electronic Mail
<b>EMI</b>	Electro-Magnetic Interference
<b>ESP</b>	Encapsulating Security Payload
<b>FDMA</b>	Frequency Division Multiple Access
<b>FED-STD</b>	Federal Telecommunication Standard
<b>FESMCC</b>	Federal EDI Standards Management Coordinating Committee
<b>FIPS</b>	Federal Information-Processing Standards
<b>FOM</b>	Federation Object Model
<b>FP</b>	File-Handling Protocol
<b>FPLMTS</b>	Future Public Land Mobile Telecommunications Systems
<b>FPS</b>	Frames Per Second
<b>FRM</b>	Framework Interface; Functional Requirements Model Functional Reference Model
<b>FTP</b>	File Transfer Protocol
<b>FTR</b>	Federal Telecommunications Recommendation
<b>FWG</b>	Functional Working Group
<b>GIC</b>	Generic Instrument Class Interface
<b>GIF</b>	Graphics Interchange Format
<b>GIS</b>	Geographic Information System



<b>GKS</b>	Graphical Kernel System
<b>GOA</b>	Generic Open Architecture
<b>GOTS</b>	Government off-the-shelf
<b>GPS</b>	Global Positioning System
<b>GRIB</b>	Gridded Binary
<b>GSM</b>	Global System for Mobile Communications
<b>GSS</b>	Generic Security Service
<b>GUI</b>	Graphical User Interface
<b>GV</b>	Ground Vehicle
<b>HCI</b>	Human-Computer Interface
<b>HDBK</b>	Handbook
<b>HF</b>	High-Frequency
<b>HLA</b>	High-Level Architecture
<b>HMAC</b>	keyed-Hashing for Message Authentication
<b>HST</b>	Host Computer Interface
<b>HTML</b>	Hypertext Markup Language
<b>HTTP</b>	Hypertext Transfer Protocol
<b>I&amp;RTS</b>	Integration and Runtime Specification
<b>I/O</b>	Input/Output
<b>IAB</b>	Internet Architecture Board
<b>ICB</b>	Instrument Communication Bus Interface
<b>ICD</b>	Interface Control Document
<b>ICL</b>	Instrument Command Language Interface
<b>ICM</b>	Instrument Communications Manager Interface
<b>ICMP</b>	Internet Control Message Protocol
<b>ICP</b>	Interface Change Proposal
<b>IDEF0</b>	Integrated Definition for Function Modeling
<b>IDEF1X</b>	Integrated Definition for Information Modeling
<b>IDL</b>	Interface Definition Language
<b>IDUP</b>	Independent Data Unit Protection

<b>IEC</b>	International Electrotechnical Commission
<b>IEEE</b>	Institute of Electrical and Electronics Engineers
<b>IER</b>	Information Exchange Requirement
<b>IETF</b>	Internet Engineering Task Force
<b>I/E/W</b>	Intelligence and Electronic Warfare
<b>IF</b>	Intermediate Frequency
<b>IFP</b>	Instrument Function and Parametric Data Interface
<b>IGES</b>	Initial Graphics Exchange Specification
<b>IGMP</b>	Internet Group Management Protocol
<b>IIOP</b>	Internet Inter-ORB Protocol
<b>ILMI</b>	Interim Local Management Interface
<b>IP</b>	Internet Protocol
<b>IPC</b>	Institute for Interconnecting and Packaging Electronic Circuits
<b>IPCP</b>	Internet Protocol Control Protocol
<b>IPT</b>	Integrated Product Team
<b>IPv4</b>	Internet Protocol Version 4
<b>IPv6</b>	Internet Protocol Next Generation Version 6
<b>IR</b>	Infrared
<b>IS</b>	Information System
<b>ISA</b>	Industry Standard Architecture
<b>ISAKMP</b>	Internet Security Association and Key Management Protocol
<b>ISDN</b>	Integrated Services Digital Network
<b>ISO</b>	International Organization for Standardization
<b>ISO/IEC</b>	International Organization for Standardization, International Electrotechnical Commission
<b>ISP</b>	International Standardized Profile; ISDN Security Program
<b>ISR</b>	Intelligence, Surveillance, & Reconnaissance
<b>ISS</b>	Intelligence Systems Secretariat
<b>IT</b>	Information Technology
<b>ITMRA</b>	Information-Technology Management Reform Act (of 1996)
<b>ITSEC</b>	European Information Technology Security Evaluation Criteria
<b>ITSG</b>	Information-Technology Standards Guidance

<b>ITU</b>	International Telecommunications Union (formerly called CCITT)
<b>ITU-T</b>	International Telecommunications Union - Telecommunications Standardization Sector
<b>JFIF</b>	JPEG File Interchange Format
<b>JIEO</b>	Joint Information Engineering Organization
<b>JPEG</b>	Joint Photographic Experts Group
<b>JSA</b>	Joint Systems Architecture
<b>JTA</b>	Joint Technical Architecture
<b>JTAGD</b>	Joint Technical Architecture Development Group
<b>JTAMDO</b>	Joint Theater Air and Missile Defense Organizations
<b>JTAWG</b>	Joint Technical Architecture Working Group
<b>JTDLMP</b>	Joint Tactical Data Link Management Plan
<b>JTIDS</b>	Joint Tactical Information Distribution System
<b>JV 2010</b>	Joint Vision 2010
<b>JVM</b>	Java Virtual Machine
<b>Kbits/s</b>	Kilobits per second
<b>Kbps</b>	Kilobits per second
<b>KEA</b>	Key Exchange Algorithm
<b>KHz</b>	Kilohertz
<b>KMP</b>	Key Management Protocol
<b>LAN</b>	Local Area Network
<b>LANE</b>	Local Area Network Emulation
<b>LCP</b>	Link Control Protocol
<b>LDAP</b>	Lightweight Directory Access Protocol
<b>LDAPv3</b>	Lightweight Directory Access Protocol 3
<b>LDR</b>	Low Data Rate
<b>LF</b>	Low Frequency
<b>LOS</b>	Line-of-Sight
<b>LPI</b>	Low Probability of Intercept

<b>LQM</b>	Link Quality Monitoring
<b>LUNI</b>	LANE User-Network Interface
<b>M&amp;S</b>	Modeling and Simulation
<b>MAC</b>	Medium-Access Control
<b>MAIS</b>	Major Automated Information System
<b>MAN</b>	Metropolitan Area Network
<b>MASINT</b>	Measurement and Signature Intelligence
<b>MAU</b>	Medium-Access Unit
<b>Mbits/s</b>	Megabits per second
<b>Mbps</b>	Megabits per second
<b>MC&amp;G</b>	Mapping, Charting, and Geodesy
<b>MCU</b>	Multipoint Control Units
<b>MD</b>	Missile Defense
<b>MDAPS</b>	Major Defense Acquisition Programs
<b>MDR</b>	Medium Data Rate
<b>MG</b>	Multinational Group
<b>MHP</b>	Mobile Host Protocol
<b>MHz</b>	Megahertz
<b>MI</b>	Motion Imagery
<b>MIB</b>	Management Information Base
<b>MIDS</b>	Multi-functional Information Distribution System
<b>MIES</b>	U.S. Army Modernized Imagery Exploitation System
<b>MIL-HDBK</b>	Military Handbook
<b>MILSATCOM</b>	Military Satellite Communications
<b>MIL-STD</b>	Military Standard
<b>MIME</b>	Multipurpose Internet Mail Extensions (MIME)
<b>MISSI</b>	Multilevel Information Systems Security Initiative
<b>MLPP</b>	Multi-Level Precedence and Preemption
<b>MMF</b>	Multimedia Formats Interface
<b>MOF</b>	Meta-Object Facility
<b>MPEG</b>	Motion Pictures Expert Group

<b>MPOA</b>	Multiprotocol over ATM
<b>MSMP</b>	Modeling and Simulation Master Plan
<b>MSI</b>	Multispectral Imagery
<b>MSP</b>	Message Security Protocol
<b>MTA</b>	Message Transfer Agent
<b>MTI</b>	Moving Target Indicator
<b>MUS</b>	Munition Systems
<b>NASA</b>	National Aeronautics and Space Administration
<b>NATO</b>	North Atlantic Treaty Organization
<b>NAWCADLKE</b>	Naval Air Warfare Center Aircraft Division-Lakehurst
<b>NBC</b>	Nuclear, Biological, Chemical
<b>NCSC</b>	National Computer Security Center
<b>NEMA</b>	National Electrical Manufacturers Association
<b>NET</b>	Network Protocols Interface
<b>NIIRS</b>	National Imagery Interpretation Rating Scale
<b>NIMA</b>	National Imagery and Mapping Agency
<b>NIPRNET</b>	Non-Secure IP Routing Network
<b>NIST</b>	National Institute of Standards and Technology
<b>NITF</b>	National Imagery Transmission Format
<b>NITFS</b>	National Imagery Transmission Format Standard
<b>NIUF</b>	North American ISDN User's Forum
<b>NLSP</b>	Network Layer Security Protocol
<b>NMD</b>	National Missile Defense
<b>NP</b>	Network Protocol
<b>NRO</b>	National Reconnaissance Office
<b>NSA</b>	National Security Agency
<b>NSM</b>	Network and Systems Management
<b>NTIS</b>	National Technical Information Service
<b>NTM</b>	National Technical Means
<b>NTP</b>	Network Time Protocol
<b>NTSC</b>	National Television Standards Committee

<b>OA</b>	Operational Architecture
<b>ODBC</b>	Open Database Connectivity
<b>ODMG</b>	Object Data Management Group
<b>OE</b>	Operating Environment
<b>OJCS</b>	Office of the Joint Chiefs of Staff
<b>OLE</b>	Object Linking and Embedding
<b>OMA</b>	Object Management Architecture
<b>OMG</b>	Object Management Group
<b>OMT</b>	Object Model Template
<b>OODBMS</b>	Object-Oriented Database Management System
<b>OOM</b>	Object-Oriented Methods
<b>OOTW</b>	Operations Other Than War
<b>ORD</b>	Operational Requirements Document
<b>OS</b>	Operating System
<b>OSD</b>	Office of the Secretary of Defense
<b>OSD A&amp;T</b>	Office of the Secretary of Defense for Acquisition and Technology
<b>OSF</b>	Open Software Foundation
<b>OSI</b>	Open Systems Interconnection
<b>OS-JTF</b>	Open Systems Joint Task Force
<b>OSPF</b>	Open Shortest Path First
<b>PASV</b>	Passive
<b>PCI</b>	Peripheral Computer Interface
<b>PCIMG</b>	PCI Industrial Computer Manufacturer's Group
<b>PCMCIA</b>	Personal Computer Memory Card International Association
<b>PCS</b>	Personal Communications Services
<b>PHY</b>	Physical Layer
<b>PIAE</b>	Profile for Imagery Access Extensions
<b>PICS</b>	Protocol Implementation Conformance Statement
<b>PKI</b>	Public-Key Infrastructure

<b>PMNV/RSTA</b>	Program Management Office for Night Vision/Reconnaissance and Target Acquisition
<b>PNG</b>	Portable Network Graphics
<b>PNNI</b>	Private Network-Network Interface
<b>POSIX</b>	Portable Operating System Interface for Computer Environments
<b>PPP</b>	Point-to-Point Protocol
<b>PPS</b>	Precise Positioning Service
<b>PRI</b>	Primary Rate Interface
<b>PRO</b>	Product Data Association
<b>PSK</b>	Phase Shift Keying
<b>PSTN</b>	Public Switched Telephone Networks
<b>QoS</b>	Quality of Service
<b>R&amp;D</b>	Research and Development
<b>RADIUS</b>	Remote Authentication Dial In User Service
<b>RDBMS</b>	Relational Database Management System
<b>RF</b>	Radio Frequency
<b>RFC</b>	Request for Comments
<b>RFI</b>	Receiver Fixture Interface Alliance
<b>RFP</b>	Request for Proposals
<b>RFX</b>	Receiver/Fixture Interface
<b>RMON</b>	Remote Monitoring
<b>RPF</b>	Raster Product Format
<b>RSVP</b>	Resource Reservation Protocol
<b>RTI</b>	Runtime Infrastructure
<b>RTP</b>	Real-Time Protocol
<b>RTS</b>	Runtime Services Interface
<b>RTT</b>	Radio Transmission Technologies
<b>SA</b>	Systems Architecture
<b>SAE</b>	Society of Automotive Engineers

<b>SAR</b>	Synthetic Aperture Radar
<b>SAR SDE</b>	Synthetic Aperture Radar Support Data Extension
<b>SATCOM</b>	Satellite Communications
<b>SBU</b>	Sensitive, But Unclassified
<b>SCC</b>	Standards Coordinating Committee
<b>SCPS</b>	Space Communications Protocol Standards
<b>SCSI-2</b>	Small Computer Systems Interface-2
<b>SDE</b>	Support Data Extensions
<b>SDF</b>	Simulation Data Format
<b>SDI</b>	Serial Data Interface
<b>SDN</b>	Secure Data Network
<b>SDNS</b>	Secure Data Network System
<b>SEDRIS</b>	Synthetic Environment Data Representation and Interchange Specification
<b>SFP</b>	Switch Function and Parametric Data Interface
<b>SGML</b>	Standard Generalized Markup Language
<b>SHF</b>	Super High Frequency
<b>SIDR</b>	Secure Intelligence Data Repository
<b>SIF</b>	Standard Simulator Database Interchange Format
<b>SIGINT</b>	Signals Intelligence
<b>SILS</b>	Standard for Interoperable LAN Security
<b>SIPE</b>	Soldier Integrated Protective Ensemble
<b>SIPRNET</b>	Secure Internet Protocol Router Network
<b>SLP</b>	Sensor Link Protocol
<b>SME</b>	Standard Electronic Module
<b>S/MIME</b>	Secure/Multipurpose Internet Mail Extensions
<b>SMPTE</b>	Society of Motion Picture and Television Engineers
<b>SMTP</b>	Simple Mail Transfer Protocol
<b>SNMP</b>	Simple Network Management Protocol
<b>SOM</b>	Simulation Object Model
<b>SONET</b>	Synchronous Optical Network
<b>SOO</b>	Statement Of Objective
<b>SOW</b>	Statement of Work



<b>SP</b>	Security Protocol
<b>SPIA</b>	Standards Profile for Imagery Access
<b>SQL</b>	Structured Query Language
<b>SR</b>	Bellcore Special Report
<b>SS</b>	Soldier Systems
<b>SSL</b>	Secure Socket Layer
<b>STANAG</b>	Standard NATO Agreement
<b>STD</b>	Standard
<b>STEP</b>	Standard for the Exchange of Product Model Data
<b>STOU</b>	Store Unique
<b>SUS</b>	Single UNIX Specification
<b>SWM</b>	Switch Matrix Interface
<b>TA</b>	Technical Architecture
<b>TACO2</b>	Tactical Communications Protocol 2
<b>TADIL</b>	Tactical Digital Information Link
<b>TAFIM</b>	Technical Architecture Framework for Information Management
<b>TASG</b>	Technical Architecture Steering Group
<b>TAWDS</b>	Tactical Automated Weather Distribution System
<b>TCP</b>	Transmission Control Protocol
<b>TCSEC</b>	Trusted Computer Security Evaluation Criteria
<b>TDL</b>	Tactical Data Link
<b>TDMA</b>	Time Division Multiple Access
<b>TED</b>	TriTeal Enterprise Desktop
<b>TEISS</b>	Enhanced Integrated Soldier System
<b>TELNET</b>	Telecommunications Network
<b>TFTP</b>	Trivial File Transfer Protocol
<b>TGWG</b>	Time and Geospatial Working Group
<b>TIA</b>	Telecommunications Industry Association
<b>TIBS</b>	Tactical Information Broadcast System
<b>TIDP</b>	Technical Interface Design Plan
<b>TIS</b>	Technical Interface Specification

<b>TMD</b>	Theater Missile Defense
<b>TMN</b>	Telecommunications Management Network
<b>TOS</b>	Type-of-Service; Test Program to Operating System Interface (ATS Subdomain Annex)
<b>TP</b>	Transport Protocol
<b>TP0</b>	Transport Protocol Class 0
<b>TPD</b>	Test Program Documentation Interface
<b>TPI</b>	Test Program Instructions
<b>TPS</b>	Test Program Set
<b>TR</b>	Technical Report
<b>TRAP</b>	Tactical Receive Equipment and Related Applications
<b>TRD</b>	Test Requirements Document
<b>TRIM</b>	Test Resource Information Model
<b>TRM</b>	Technical Reference Model
<b>TRMWG</b>	Technical Reference Model Working Group
<b>TRSL</b>	Test Requirements Specification Language
<b>TSIG</b>	Trusted Systems Interoperability Group
<b>TSIX(RE)</b>	Trusted Security Information Exchange for Restricted Environments
<b>TSR</b>	Test Strategy Report
<b>U</b>	Unclassified
<b>UCS</b>	Universal Multiple-Octet Coded Character Set
<b>UDP</b>	User Datagram Protocol
<b>UHF</b>	Ultra High Frequency
<b>UML</b>	Unified Modeling Language
<b>UNI</b>	User-Network Interface
<b>URL</b>	Uniform Resource Locator
<b>USA</b>	United States Army
<b>USACOM TMD</b>	United States Atlantic Command Theater Missile Defense
<b>USAF</b>	United States Air Force
<b>USCG</b>	United States Coast Guard
<b>USD (A&amp;T)</b>	Under Secretary of Defense for Acquisition and Technology

<b>USIGS</b>	United States Imagery and Geospatial Information Service
<b>USIS</b>	United States Imagery System
<b>USMC</b>	United States Marine Corps
<b>USMTF</b>	United States Message Text Format
<b>USN</b>	United States Navy
<b>USNO</b>	United States Naval Observatory
<b>UTC</b>	Coordinated Universal Time
<b>UTC (USNO)</b>	UTC as maintained at the U.S. Naval Observatory
<b>UTR</b>	Unit Under Test Requirements Interface
<b>UUT</b>	Unit Under Test
<b>UVMaP</b>	Urban Vector Smart Map
<b>VHDL</b>	VHSIC Hardware Description Language
<b>VHF</b>	Very High Frequency
<b>VHS</b>	Vertical Helical Scan
<b>VHSIC</b>	Very High Speed Integrated Circuit
<b>VIMAS</b>	Visible, Infrared, and Multispectral Airborne Sensor
<b>VIMAS SDE</b>	VIMAS Support Data Extensions
<b>VISA</b>	Virtual Instrument Standard Architecture
<b>VISP</b>	Video Imagery Standards Profile
<b>VITC</b>	Vertical Interval Time Code
<b>VITD</b>	Vector Product Interim Terrain Data
<b>VLf</b>	Very Low Frequency
<b>VMap</b>	Vector Map
<b>VME</b>	Versa Modulo Europa
<b>VMF</b>	Variable Message Format
<b>VPF</b>	Vector Product Format
<b>VPP</b>	<i>VXIplug&amp;play</i>
<b>VRML</b>	Virtual Reality Modeling Language
<b>VSM</b>	Video Systems Matrix
<b>VTC</b>	Video Teleconferencing
<b>VXI</b>	VME Extensions for Instrumentation

<b>W3C</b>	World Wide Web Consortium
<b>WGS</b>	World Geodetic System
<b>WIMS-WCDMA</b>	Wireless Multimedia and Messaging Services
<b>WMO</b>	World Meteorological Organization
<b>WS</b>	Weapon Systems
<b>WSHCI</b>	Weapon Systems Human-Computer Interface
<b>WSTAWG</b>	Weapons Systems Technical Architecture Working Group
<b>WVSPLUS</b>	World Vector Shoreline Plus
<b>WWW</b>	World Wide Web
<b>XML</b>	eXtensible Markup Language
<b>Y2K</b>	Year 2000

## **Appendix B: List of Mandated Standards and Sources**

### **Introduction**

This appendix summarizes the mandated standards from the Joint Technical Architecture (JTA), and provides references to locations where the standards may be obtained. In Section B.2, the mandated standards are summarized in a set of tables, with one table for each section of the JTA Core (Sections 2.1 to 2.6) and one table for each domain and subdomain annex. If there is an inconsistency between this appendix and the document body, the document body takes precedence.

The first column in each table contains a reference to the JTA section in which the standard is mandated. When there are multiple standards mandated in a section, only the first standard contains a reference. The second column contains the full citation for the mandated standard, including an identifying number, date, and title.

The third column provides a view of the standards mandated in previous versions of the JTA.

The fourth column provides information on the emerging standards expected to be mandated in future versions of the JTA. There is a clear separation between mandated and emerging standards in the JTA; for example, JTA Core-mandated standards are found within sections 2.x.2, and emerging standards within sections 2.x.3. In addition, the need was identified to map (whenever possible) emerging standards to mandated standards or service areas. Therefore, Appendix B includes emerging standards once in the emerging section, and, when appropriate, duplicated (mapped) to mandated service areas/standards.

Appendix C—Document Sources—lists the organizations from which standards documents cited in the JTA may be obtained. It contains two tables: Commercial Documents, and Government Documents. Each entry gives the full name of the relevant organization, and, where available, the organization's postal address and telephone number. Where possible, each entry also includes a World Wide Web Uniform Resource Locator (URL) providing access to information about the cited documents. In many cases, the text of the documents can be downloaded from the corresponding Web site.

This page intentionally left blank.

## Section 2.1 – Information-Technology Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.1.2.2.2 Defense Information Infrastructure Common Operating Environment	Defense Information Infrastructure Common Operating Environment, Integration and Runtime Specification (I&RTS), Version 3.1, 1 October 1998.			

Page intentionally left blank.



## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.2.2.2.1.2 User Interface Services	C507, Window Management (X11R5): X-Window System Protocol, X/Open CAE Specification, April 1995.	same		
	C508, Window Management (X11R5): Xlib - C Language Binding, X/Open CAE Specification, April 1995	same		
	C509, Window Management (X11R5): X Toolkit Intrinsics, X/Open CAE Specification, April 1995	same		
	C510, Window Management (X11R5): File Formats & Application Conventions, X/Open CAE Specification, April 1995	same		
	M021 CDE 2.1/Motif 2.1 User's Guide, ISBN 1-85912-173-X, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	M027: CDE 2.1/Motif 2.1 – Style Guide and Glossary, ISBN 1-85912-104-7, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	M028: CDE 2.1/Motif 2.1 – Style guide Certification Check List, ISBN 1-85912-109-8, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	M029: CDE 2.1/Motif 2.1 – Style Guide Reference, ISBN 1-85912-114-4, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	M213: Motif 2.1 – Programmer's Guide, ISBN-1-85912-134-9, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	M214A: Motif 2.1 – Programmer's Reference, Volume 1, ISBN 1-85912-119-5, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	M214B: Motif 2.1 – Programmer's Reference, Volume 2, ISBN 1-85912-124-1, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	M214C: Motif 2.1 – Programmer's Reference, Volume 3, ISBN 1-85912-164-0, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	M216: Motif 2.1 – Widget Writer's Guide, ISBN 1-85912-129-2, October 1997.	X/Open C323, Common Desktop Environment (CDE) Version 1.0, April 1995		
	Win32 APIs, Window Management and Graphics Device Interface, Volume 1 Microsoft Win32 Programmers Reference Manual, 1993 or later, Microsoft Press	same (see Comment)		Same reference as previously mandated; but defaults to latest version (i.e., ". 1993 or later")
2.2.2.2.1.3 Data Management Services	ISO/IEC 9075:1992, Information Technology - Database Language - SQL, as modified by FIPS PUB 127-2:1993, Database Language for Relational DBMS (Entry Level SQL)	same		Entry-level SQL
	ISO/IEC 9075-3 - 1995 Information Technology - Database Languages - SQL - Part 3: Call-Level Interface (SQL/CLI)	Open Data-Base Connectivity ODBC 2.0		
2.2.2.2.1.4.1 Document Interchange	ISO 8879:1986, Standard Generalized Markup Language (SGML), with Amendment 1, 1988	same		
	HTML 4.0 Specification, W3C Recommendation, revised 24-Apr-1998, Rec-html40-19980424.	REC-html-971218, Hypertext Markup Language (HTML), Internet Version 4.0, Reference Specification, World Wide Web Consortium (W3C), 18 December 1997.		Interchange format used by the World Wide Web for hypertext format and embedded navigational links.
	Extensible Markup Language (XML) 1.0 W3C Recommendation, 10 February 1998. Reference: REC-xml-19980210,			

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.2.2.2.1.4.2 Graphics Data Interchange	JPEG File Interchange Format (JFIF), Version 1.02, C-Cubed Microsystems.	same		
	PNG (Portable Network Graphics) Specification, W3C Recommendation, REC-png.html < <a href="http://www.w3.org/TR/REC-png.htm">http://www.w3.org/TR/REC-png.htm</a> >			
	Graphics Interchange Format (GIF), Version 89a, 31 July 1990, CompuServe Incorporated	same		
2.2.2.2.1.4.3 Geospatial Data Interchange	MIL-STD-2411, Raster Product Format (RPF), 6 October 1994, with Notice of Change 1, 17 January 1995			
	MIL-STD-2407, Interface Standard for Vector Product Format (VPF), 28 June 1996	same		
	MIL-STD-2401, Department of Defense World Geodetic System (WGS-84), 11 January 1994	same		
	FIPS PUB 10-4, Countries, Dependencies, Areas of Special Sovereignty, and Their Principal Administrative Divisions, April 1995	same		
2.2.2.2.1.4.4 Still Imagery Data Interchange	MIL-STD-2500B, National Imagery Transmission Format (Version 2.1) for the National Imagery Transmission Format Standard, 22 August 1997 with Notice 1, 2 October 1998. An additional document, titled "CHANGE SUMMARY NITF2.0 to NITF2.1," 28 Jan 97, describes the changes and additions (including the Y2K fix) made to this standard.	MIL-STD-2500A, National Imagery Transmission Format (Version 2.0) for the National Imagery Transmission Format Standard, 12 October 1994; revised 7 February 1997		
	MIL-STD-188-196, Bi-Level Image Compression for the National Imagery Transmission Format Standard, 18 June 1993; with Notice 1, 27 June 1996.	same		Added "Change Notice"
	MIL-STD-188-199, Vector Quantization Decompression for the National Imagery Transmission Format Standard, 27 June 1994; with Notice 1, 27 June 1996.	same		Added "Change Notice"

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ISO/IEC 8632:1992 Computer Graphics Metafile (CGM) for the Storage and Transfer of Picture Description Information, as profiled by MIL-STD-2301A, Computer Graphics Metafile (CGM) Implementation Standard for the National Imagery Transmission Format Standard, 5 June 1998	MIL-STD 2301A, Computer Graphics Metafile (CGM) Implementation Standard for the National Imagery Transmission Format Standard, 18 June 1993 with Notice of Change 1, 12 October 1994		
	ISO/IEC 10918-1: 1994, Joint Photographic Experts Group (JPEG), as profiled in MIL-STD-188-198A, Joint Photographic Experts Group (JPEG) Image Compression for the National Imagery Transmission Format Standard, 15 December 1993; with Notice 1, 12 October 1994 and Notice 2, 14 March 1997.	MIL-STD-188-198A, Joint Photographic Experts Group (JPEG) Image Compression for the National Imagery Transmission Format Standard, 15 December 1993		Although the NITFS uses the same ISO JPEG algorithm as mandated in Section 2.2.2.1.4.2, the NITFS file format is not interchangeable with the JFIF file format.
2.2.2.2.1.4.5.1.1 Video Imagery	ITU-R BT.601-4, Encoding Parameters of Digital Television for Studios, 1994	same		
	ISO/IEC 13818-1:1996 Information Technology - Generic Coding of Moving Pictures and Associated Audio Information - Part 1: Systems (MPEG-2); 1996, with Amendment 1:1997.	same with exception of Amendment 1 (1997)		
	ISO/IEC 13818-2:1996 Information Technology - Generic Coding of Moving Pictures and Associated Audio Information - Part 2: Video (MPEG-2); 1996, with Amendment 1:1997 and Amendment 2:1997.	same with exception of Amendment 1 (1997) and Amendment 2 (1997)		
	ISO/IEC 13818-4:1996 Information Technology - Generic Coding of Moving Pictures and Associated Audio Information - Part 4: Conformance testing; 1996.	same		

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ANSI/SMPTE 12M-1998, Time and Control Code for Video and Audio Tape for 525 Line/60 Field Television Systems.	ANSI/SMPTE 12M-1995, Television, Audio and Film - Time and Control Code		Within 12M, Vertical Interval Time Code (VITC), Drop Frame shall be used for 29.97 FPS systems, Non-Drop Frame Time Code shall be used for 24, 25, 30, 50, and 60 FPS systems. Note: Analog NTSC systems are based on 29.97 FPS.
	ANSI/SMPTE 309M-1998, Transmission of Date and Time Zone Information in Binary Groups of Time and Control Code.			
	ANSI/SMPTE 259M-1997, Television - 10 bit 4:2:2 Component (Serial Digital Interface).	ANSI/SMPTE 259M-1993 television - 10 bit 4:2:2 Component (Serial Digital Interface); 1993		
	ANSI/SMPTE 292M-1998, Television - Bit-Serial Digital Interface for High-Definition Television Systems			
	ANSI/SMPTE 293M-1996, Television - 720 x 483 Active Line at 59.94-Hz Progressive Scan Production – Digital Representation			
	ANSI/SMPTE 296M-1997, Television – 1270 x 720 Scanning, Analog and Digital Representation and Analog Interface			
	ANSI/SMPTE 274M-1995, Television -1920 x 1080 Scanning and Interface			
2.2.2.2.1.4.5.1.4 Video Support	ISO/IEC 11172-1:1993, Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbits/s – Part 1: Systems, 1993; with Technical Corrigendum 1, 1995.	same		
	ISO/IEC 11172-2: 1993, Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbits/s - Part 2 Video, 1993	same		

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ISO/IEC 13818-1:1996, Information technology – Generic Coding of Moving Pictures and Associated Audio Information – Part 1: Systems (MPEG-2), 1996 with Amendment 1:1997.	same		The identical text is also published as ITU-T Rec.H.222.0.
	ISO/IEC 13818-2:1996 – Generic Coding of Moving Pictures and Associated Audio Information – Part 2: Video (MPEG-2), 1996; with Amendment 1:1997 and Amendment 2:1997, Information technology	same		The identical text is also published as ITU-T Rec.H.262.
2.2.2.2.1.4.6 Audio Data Interchange	ISO/IEC 11172-1:1993, Information Technology – Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbits/s - Part 1: Systems, 1993; with Technical Corrigendum 1:1995.	same		
	ISO/IEC 11172-3:1993, Information Technology – Encoding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbits/s - Part 3 (Audio Layer-3 only); with Technical Corrigendum 1:1996.	same		
2.2.2.2.1.4.6.1.1 Audio for Video Imagery	ANSI S4.40-1992/AES3-1992, AES (Audio Engineering Society) Recommended Practice for Digital Audio Engineering - Serial transmission format for two-channel linearly represented digital audio data, 1992 (reaffirmed and amended 1997)	same		Used for digital audio signal interchange in uncompressed digital video
	ISO/IEC 13818-3:1995, Information technology - Generic coding of moving pictures and associated audio information, with Amendment 1:1996. Used for compressed digital audio systems, MPEG-2 Part 3: Audio	same		
2.2.2.2.1.4.6.1.4 Audio for Video Support	ISO/IEC 11172-3: 1993, Information technology - Encoding of moving pictures and associated audio for digital storage media at up to about 1.5 Megabits per second (Mbit/s) - Part 3 (Audio Layer-3 only); with Technical Corrigendum 1:1996.	same		
2.2.2.2.1.4.7 Multimedia Data Interchange	ISO 9660:1988, Information processing - Volume and file structure of CD-ROM for information interchange			

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.2.2.2.1.4.8 Atmospheric and Oceanographic Data Interchange	FM 92-X Ext. GRIB WMO No. 306, Manual on Codes, International Codes, Volume 1.2 (Annex II to WMO Technical Regulations) Parts B and C	same		
	FM 94-X Ext. BUFR WMO No. 306, Manual on Codes, International Codes, Volume 1.2 (Annex II to WMO Technical Regulations) Parts B and C	same		
2.2.2.2.1.4.9 Time-of-Day Data Interchange	ITU-R Recommendation TF.460-4, Standard-frequency and Time-signal Emissions, International Telecommunications Union, July 1986	same		
2.2.2.2.1.5 Graphic Services	ANSI/ISO/IEC 9636-1,2,3,4,5,6:1991 (R1997), Information Technology-Computer Graphics-Interfacing (CGI) Techniques for Dialogue with Graphics Devices	same		Reaffirmed in 1997
	The OpenGL Graphics System: A Specification (Version 1.1) 25 June 1996	same		For 3D Graphics.
2.2.2.2.1.7 Operating System Services	ISO/IEC 9945-1:1996, Information Technology - Portable Operating System Interface (POSIX) - Part 1: System Application Program Interface (API) [C language] (Mandated Services)	same		Note that emerging AUSTIN citation combines the 9945 series and Single UNIX specification into one standard.
	ISO/IEC 9945-1:1996:(Real-time Extensions) to ISO/IEC 9945-1:1996, Information Technology - Portable Operating System Interface (POSIX)- Part 1: System Application Program Interface (API) [C language] (Real-time Optional Services)	same		
	ISO/IEC 9945-1:1996: (Thread Extensions) to ISO/IEC 9945-1:1996, Information Technology - Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) [C language] (Thread Optional Services)	same		
	ISO/IEC 9945-2: 1993, Information Technology – Portable Operating System Interface (POSIX) – Part 2: Shell and Utilities, as profiled by FIPS PUB 189: 1994, Information Technology - Portable Operating System Interface (POSIX) – Recommendations (Section 12) and Implementation Guidance (Section 13).	same		

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	IEEE 1003.2d:1994, POSIX - Part 2: Shell and Utilities – Amendment: Batch Environment	same		
	ISO/IEC 14519:1999, Information Technology – POSIX Ada Language Interfaces - Binding for System Application Program Interface (API) – Realtime Extensions.	IEEE 1003.5b:1996, IEEE Standard for Information Technology - POSIX Ada Language Interfaces - Part 1: Binding for System Application Programming Interface (API) - Amendment 1: Realtime Extensions (incorporates IEEE 1003.5:1992)		
	IEEE 1003.5g:1999, IEEE Standard for Information Technology - POSIX Ada Language Interfaces - Part 1: Binding for System Application Program Interface (API) - Amendment g: Realtime Extensions.	IEEE 1003.5b:1996, IEEE Standard for Information Technology - POSIX Ada Language Interfaces - Part 1: Binding for System Application Programming Interface (API) - Amendment 1: Realtime Extensions (incorporates IEEE 1003.5:1992)		
	IEEE 1003.13: IEEE Standard for Information technology – Standardization Applications Environment Profile – POSIX Realtime Application Program Interface (API).			
	IEEE 1003.5b:1996, IEEE Standard for Information Technology - POSIX Ada Language Interfaces - Part 1: Binding for System Application Programming Interface (API) - Amendment 1: Real-time Extensions (Incorporates IEEE 1003.5:1992)	same		
	Win32 APIs, Window Management and Graphics Device Interface, Volume 1 Microsoft Win32 Programmers Reference Manual, 1993 or later, Microsoft Press	same		
2.2.2.2.1.8 International-ization Services	ANSI/ISO 8859-1:1987, Information Processing – 8-Bit Single Byte Coded Character Sets, Part 1: Latin Alphabet No. 1	same		



## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ISO/IEC 10646-1:1993, Information Technology - Universal Multiple-Octet Coded Character Set (UCS), Part 1: Architecture and Basic Multilingual Plane with Technical Corrigendum 1:1996	same		
2.2.2.2.1.11.1 Remote-Procedure Computing	C310, DCE 1.1: Time Services Specification, X/Open CAE Specification, November 1994	same		
	C311, DCE 1.1: Authentication and Security Services, Open Group CAE Specification, August 1997	same		
	C705, DCE 1.1: Directory Services, Open Group CAE Specification, August 1997	same		
	C706, DCE 1.1: Remote Procedure Call, Open Group CAE Specification, August 1997	same		
2.2.2.2.1.11.2 Distributed-Object Computing	OMG document formal/98-12-01, Common Object Request Broker: Architecture and Specification, Version 2.3, June 1999.	The Common Object Request Broker: Architecture and Specification, Version 2.1, OMG document formal/1 September 1997		
	OMG document formal/97-12-10, CORBAServices Naming Service Specification, March 1995	Naming Service, 7 December 1993, contained in CORBAServices: Common Object Services Specification, OMG Document formal/4 July 1997		
	OMG document formal/97-12-11, CORBAServices Event Service Specification, March 1995	Event Notification Service, 7 December 1993, contained in CORBAServices: Common Object Services Specification, OMG document formal/24 February 1997		

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	OMG document formal/97-12-17, CORBAservices Transaction Service Specification, November 1997	Object Transaction Service, 6 December 1994, contained in CORBAservices: Common Object Services Specification, OMG document formal/24 February 1997		
	OMG document formal/97-12-21, CORBAservices Time Service Specification, July 1997			
	OMG document formal/97-12-23, CORBAservices Trading Object Service Specification, March 1997			
	OMG document orbos/98-06-01, CORBAservices DCE/CORBA Internetworking Service			
	OMG document orbos/97-09-06, COM/CORBA Part B, Internetworking, November 19, 1997.			
	OMG document orbos/97-09-07, COM/CORBA Part A Revision, November 19, 1997.			
2.2.3.1 Data Management			ISO/IEC DIS 9075-1 Information technology – Database languages – SQL – Part 1: Framework (SQL/ Framework).	
			ISO/IEC DIS 9075-2 Information technology – Database languages – SQL – Part 2: Foundation (SQL/ Foundation).	
			ISO/IEC DIS 9075-3 Information technology – Database languages – SQL – Part 3: Call-Level Interface (for SQL3).	
			ISO/IEC DIS 9075-4 Information technology – Database languages – SQL – Part 4: Persistent Stored Modules (SQL/PSM).	

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			ISO/IEC DIS 9075-5 Information technology – Database languages – SQL – Part 5: Host Language Bindings (SQL/Bindings).	
			ISO/IEC DIS 9075-10 Information technology – Database languages – SQL – Part 10: Object Language Bindings (SQL/OLB).	
			ISO/IEC DIS 13249-3 Information Technology – Database languages – SQL Multimedia and Application Packages – Part 3: Spatial.	
			ISO/IEC 9579:1999 Information Technology – Remote Database Access for SQL.	
			The Object Database Standard: ODMG 2.0, Edited by R.G.G. Cattell et al. The Morgan Kaufmann Series in Data Management, 1997, ISBN 1-55860-463-4.	
2.2.3.2.1 Document Interchange			XHTML™ 1.0: The Extensible HyperText Markup Language: A Reformulation of HTML 4.0 in XML 1.0, W3C Working Draft 5th May 1999 < <a href="http://www.w3.org/TR/1999/xhtml1-19990505">http://www.w3.org/TR/1999/xhtml1-19990505</a> >	
			Resource Description Framework (RDF) Model and Syntax Specification, REC-rdf-syntax-19990222 < <a href="http://www.w3.org/TR/1999/REC-rdf-syntax-19990222">http://www.w3.org/TR/1999/REC-rdf-syntax-19990222</a> >	

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			Resource Description Framework (RDF) Schema Specification, W3C Recommendation PR-rdf-schema-19990303 ( <a href="http://www.w3.org/TR/1999/PR-rdf-schema-19990303">http://www.w3.org/TR/1999/PR-rdf-schema-19990303</a> ).	
2.2.3.2.2.1 Virtual Reality Modeling Language			ISO/IEC 14772-1:1998, Information technology – Computer graphics and image processing - The Virtual Reality Modeling Language - Part 1: Functional specification and UTF-8 encoding	
2.2.3.2.3 Geospatial Data Interchange			DIGEST Digital Geographic Information Exchange Standard (DIGEST): Edition 2.0, June 1997	
2.2.3.2.5.1.1 Video Imagery			ATSC A/52 (Audio), Dolby Digital AC3 is an emerging standard for advanced television applications.	
2.2.3.3 Binary Floating Data Interchange			ANSI/IEEE 754-1985, IEEE standard for Binary Floating – Point Arithmetic, March 21, 1985	
2.2.3.4.1 POSIX			IEEE P1003.1a Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) [C Language] – Amendment, Draft 16, December 1998.	

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IEEE P1003.1d D13, April 1999: Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) – Amendment d: Additional Realtime Extensions [C Language], Draft 11, May 1998	
			IEEE P1003.1g – Information Technology – Portable Operating System Interface (POSIX) – Part xx: Protocol Independent Interfaces (PII) Draft 6.6, March 1997.	
			IEEE P1003.1h D9, July 1999: Services for Reliable, Available, Serviceable Systems.	
			IEEE P1003.1j D9, July 1999: Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) – Amendment j: Advanced Realtime Extensions [C Language], Draft 7, October 1998.	
			IEEE P1003.1m – Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) – Amendment m: Checkpoint/Restart Interface {C Language}, Draft 2, November 1998.	

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			P1003.1q - Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: System Application Program Interface (API) – Amendment q: Trace [C Language], Draft 5, July 1999.	
			P1003.5g, Standard for Information Technology – Portable Operating System Interface (POSIX) - Ada Language Interfaces – Part 1: Application Program Interface (API) – Amendment g: Realtime Extension, September 1999.	
			P1003.13a/D1, Standard for Information Technology – Standardized Application Environment Profile – POSIX Realtime Application Support (AEP) – Amendment a: Realtime Extension, September 1999.	
			P1003.21 Draft Standard for Information Technology – Portable Operating System Interface (POSIX) – Part 1: Realtime Distributed Systems Communication Application Program Interface (API) [Language-Independent], V2.0, August 1998	

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.2.3.4.2 Virtual Machines			The Java Virtual Machine (JVM) is defined in "The Java Virtual Machine Specification" by Tim Lindholm and Frank Yellin, Addison-Wesley, 1997, ISBN 0-201-63452-X. It is also available at: < <a href="http://java.sun.com/docs/books/vmspec/index.html">http://java.sun.com/docs/books/vmspec/index.html</a> >	Will be used for web browser and portable applications
2.2.3.5.1 Remote-Procedure Computing			OSF-DCE Version 1.2.2, was issued to developers by the Open Group in November 1997	
2.2.3.5.2 Distributed-Object Computing			OMG document orbos/98-05-10, Persistent State Service 2.0.	
			OMG document orbos/98-03-04, CORBAservices Interoperable Name Service.	
			OMG document orbos/98-05-04, CORBAservices CORBA/Firewall Security	
			OMG document ad/97-08-14, Meta Object Facility (MOF)	
			OMG document ec/98-02-04, Negotiation Facility	
			OMG Document Number: bom/99-03-01, Workflow Management Facility, dated 9 March 1999.	
			OMG document mfg/98-06-06 Distributed Simulation Service	
			OMG document orbos/99-02-12, Joint Revised Realtime CORBA submission.	

## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			OMG document orbos/99-03-29, Errata for the Realtime CORBA joint/revised submission orbos/99-02-12	
2.2.3.6.1 Environment Management			DoD-5015.2-STD, Design Criteria Standard for Electronic Records Management Software Applications, November 1997 (Sections 2.2.1-2.2.1.1 only).	
2.2.3.6.2 Learning Technology			IEEE 1484.1, Architecture and Reference Model. Base Document entitled, "Learning Technology Systems Architecture (LTSA)," Version 4.00, 1998-05-21, is linked to/from: < <a href="http://grouper.ieee.org/groups/ltsc/ltscdocs/">http://grouper.ieee.org/groups/ltsc/ltscdocs/</a> >.	
			IEEE P1484.2, Learner Model. Base Document entitled, "Personal and Performance Information (PAPI) Specification," Draft Version 5, 15 January 1999, is linked to/from: < <a href="http://grouper.ieee.org/groups/ltsc/ltscdocs/">http://grouper.ieee.org/groups/ltsc/ltscdocs/</a> >.	
			IEEE P1484.12 Learning Object Metadata (LOM), Version 2.5a December 1998, is linked to/from: < <a href="http://grouper.ieee.org/groups/ltsc/ltscdocs/">http://grouper.ieee.org/groups/ltsc/ltscdocs/</a> >.	



## Section 2.2 – Information-Processing Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			<p>AICC AGR 006 Computer Managed Instruction (CMI), V2.0, 1998 May 19, (See &lt;<a href="http://www.aicc.org/pages/down-docs-index.htm">http://www.aicc.org/pages/down-docs-index.htm</a>&gt;) is an emerging standard for non-Web-based training.</p> <p>Additionally, this specification is being further developed by IEEE P1484.11 Standard for Computer-Managed Instruction (CMI) linked to/ from: &lt;<a href="http://grouper.ieee.org/groups/ltsc/ltscdocs/">http://grouper.ieee.org/groups/ltsc/ltscdocs/</a>&gt;</p>	

Page intentionally left blank.

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.3.2.1.1 Host Standards	IETF Standard 3/RFC-1122/RFC-1123, Host Requirements, October 1989	same		
2.3.2.1.1.1.1 Electronic Mail	ACP 123, Common Messaging Strategy and Procedures, November 1994	same		
	ACP 123, U.S. Supplement No. 1, Common Messaging Strategy and Procedures, November 1995	same		
	IETF Standard 10/RFC-821/RFC-1869/RFC-1870, Simple Mail Transfer Protocol (SMTP) Service Extensions, November 1995	same		
	IETF Standard 11/RFC-822/RFC-1049, Standard for the Format of ARPA Internet Text Messages, 13 August 1982	same		
	IETF RFCs 2045-2049, Multipurpose Internet Mail Extensions (MIME) Parts 1-5, November 1996	same		
2.3.2.1.1.1.2.1 X.500 Directory Services	ITU-T X.500, The Directory - Overview of Concepts, Models, and Services - Data Communication Networks Directory, 1993	same		
2.3.2.1.1.1.2.2 Lightweight Directory Access Protocol (LDAP)	IETF RFC-1777, Lightweight Directory Protocol (LDAP), March 1995	same		
2.3.2.1.1.1.2.3 Domain Name System	IETF Standard 13/RFC-1034/RFC-1035, Domain Name System, November 1987	same		
2.3.2.1.1.1.3 File Transfer	IETF Standard 9/RFC-959, File Transfer Protocol, October 1985, with the following FTP commands mandated for reception: Store unique (STOU), Abort (ABOR), and Passive (PASV).	same		
2.3.2.1.1.1.4 Remote Terminal	IETF Standard 8/RFC-854/RFC-855, Telnet Protocol, May 1983	same		
2.3.2.1.1.1.5 Network Time Synchronization	IETF RFC-1305, Network Time Protocol (V3), Specification Implementation and Analysis, March 1992	same		
2.3.2.1.1.1.6 Bootstrap Protocol	IETF RFC-951, Bootstrap Protocol, 1 September 1985	same		

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	IETF RFC-2132 DHCP Options and BOOTP Vendor Extensions, March 1997	IETF RFC-1533, DHCP Options and BOOTP Vendor Extensions, October 1993		IETF RFC-2132 obsoletes IETF RFC-1533
	IETF RFC-1542, Clarifications and Extensions for the Bootstrap Protocol, 27 October 1993	same		
2.3.2.1.1.1.7 Configuration Information Transfer	IETF RFC-2131, Dynamic Host Configuration Protocol, March 1997	IETF RFC-1541, Dynamic Host Configuration Protocol, 27 October 1993		IETF RFC-2131 obsoletes IETF RFC-1541
2.3.2.1.1.1.8.1 Hypertext Transfer Protocol	IETF RFC-2616, Hypertext Transfer Protocol – HTTP/1.1, June 1999.	IETF-RFC-1945, Hypertext Transfer Protocol - HTTP/1.0, 17 May 1996		
2.3.2.1.1.1.8.2 Uniform Resource Locator	IETF RFC-1738, Uniform Resource Locators, 20 December 1994	same		
	IETF RFC-1808, Relative Uniform Resource Locators, June 1995	same		
2.3.2.1.1.1.9 Connectionless Data Transfer	MIL-STD-2045-47001B, Connectionless Data Transfer Application Layer Standard, 20 January 1998	same		
2.3.2.1.1.2.1.1 Transmission Control Protocol	IETF-Standard 7/RFC-793, Transmission Control Protocol, September 1981. In addition, PUSH flag and the NAGLE algorithm, as defined in IETF Standard 3, Host Requirements.	same		
	IETF RFC-2001, TCP Slow Start, Congestion Avoidance, Fast Retransmit, and Fast Recovery Algorithms, January 1997	same		
2.3.2.1.1.2.1.2 User Datagram Protocol)	IETF Standard 6/RFC-768, User Datagram Protocol, 28 August 1980	same		
2.3.2.1.1.2.1.3 Internet Protocol	IETF Standard 5/RFC-791/RFC-950/RFC-919/RFC-922/RFC-792/RFC-1112, Internet Protocol, September 1981. In addition, all implementations of IP must pass the 8-bit Type-of-Service (TOS) byte transparently up and down through the transport layer as defined in IETF Standard 3, Host Requirements.	same		
	IETF RFC-1770, IPv4 Option for Sender Directed Multi-Destination Delivery, 28 March 1995	same		To be used only with Combat Net Radio (CNR) routers.

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.3.2.1.1.2.2 OSI Transport Over IP-based Networks	IETF Standard 35/RFC-1006, ISO Transport Service on top of the TCP, May 1987	same		
2.3.2.1.2 Video Teleconferencing Standards	FTR 1080A-1998, Appendix A, Video Teleconferencing Profile, October 1998	FTR 1080-1997, Profile for Video Teleconferencing, Appendix A, 30 October 1997.		The key standard included in FTR 1080A-1998 is ITU-T H.320, Narrow Band Visual Telephone Systems and Terminal Equipment, an umbrella standard of recommendations addressing audio, video, signaling, and control. Another important standard included is ITU-T T.120, Transmission Protocols for Multimedia Data, July 1996. This references a family of standards for applications implementing the features of audiographic conferencing,

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
				facsimile, still image transfer, annotation, pointing, shared whiteboard, file transfer, audio-visual control, and application sharing. These T.120 standards are also mandated for these applications when used over LANs and at low bit rates (9.6-28.8 kbps). Appendix A of the FTR also specifies VTC security requirements
	ITU-T T.120, Transmission Protocols for Multimedia Data, July 1996.	same		
	ITU-T H.323, Packet-based Multimedia Communications Systems, January 1998.			For VTC terminals operating over Local Area Networks. For all other implementations of H.323, see emerging standards paragraph 2.3.3.1.2.
	ITU-T H.324, Terminal for Low Bit Rate Multimedia Communications, January 1998	ITU-T H.324, Terminal for Low Bit Rate Multimedia Communications, March 1996		For VTC terminals operating at low bit rates (9.6-28.8 kbps)
	ITU-T H.244, Synchronized Aggregation of Multiple 64 or 56 Kbps channels, July 1995	same		For VTC terminal operation with inverse multiplexers
2.3.2.1.3.1 Analog Facsimile Standards	EIA/TIA-465-A, Group 3 Facsimile Apparatus for Document Transmission, 21 March 1995	same		
	EIA/TIA-466-A, Procedures for Document Facsimile Transmission, 27 September 1996	same		

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.3.2.1.3.2 Digital Facsimile Standard	MIL-STD 188-161D, Interoperability and Performance Standards for Digital Facsimile Equipment, 10 January 1995	same		
2.3.2.1.4 Secondary Imagery Dissemination Communications Standards	MIL-STD-2045-44500, National Imagery Transmission Format Standard (NITFS) Tactical Communications Protocol 2 (TACO2), 18 June 1993; with Notice of Change 1, 29 July 1994; and Notice of Change 2, 27 June 1996	same		
2.3.2.1.5 Global Positioning System	ICD-GPS-200C, NAVSTAR GPS Space Segment/ Navigation User Interfaces, 16 October 1997.			
	ICD-GPS-222A, NAVSTAR GPS UE Auxiliary Output Chip Interface (U), 26 April 1996.			
	ICD-GPS-225A, NAVSTAR GPS Selective Availability/Anti-spoofing Host Application Equipment Design Requirements with the Precise Positioning Service Security Module (U), 12 March 1998.			
2.3.2.2.1 Internetworking (Router) Standards	IETF RFC-1812, Requirements for IP Version 4 Routers, 22 June 1995	same		
	IETF Standard 6/RFC-768, User Datagram Protocol, 28 August 1980	same		
	IETF Standard 7/RFC-793, Transmission Control Protocol, September 1981	same		
	IETF Standard 8/RFC-854/RFC-855, TELNET Protocol, May 1983	same		
	IETF Standard 13/RFC-1034/RFC-1035, Domain Name System, November 1987	same		
	IETF RFC-951, Bootstrap Protocol, 1 September 1985	same		
	IETF RFC-2132, DHCP Options and BOOTP Vendor Extensions, March 1997	IETF RFC-1533, DHCP Options and BOOTP Vendor Extensions, 8 October 1993		IETF RFC-2132 obsoletes IETF RFC-1533
	IETF RFC-2131, DHCP, Options on BOOTP Vendor Extensions, March 1997	IETF RFC-1541, Dynamic Host Configuration Protocol, 27 October 1993		IETF RFC-2131 obsoletes IETF RFC-1541
	IETF RFC-1542, Clarifications and Extensions for the Bootstrap Protocol, October 1993	same		

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	IETF Standard 33/RFC-1350, The TFT Protocol Revision2, July 1992, to be used for initialization only	same		
2.3.2.2.1.1 Internet Protocol	IETF Standard 5/RFC-791/RFC-950/RFC-919/RFC-922/ RFC-792/RFC-1112, Internet Protocol, September 1981	same		
	IETF Informational RFC-1770, IPv4 Option for Sender Directed Multi-Destination Delivery, March 1995	same		To be used only with Combat Net Radio (CNR) routers.
2.3.2.2.1.2.1 Interior Routers	IETF Standard 54/RFC-2328, Open Shortest Path First Routing Version 2, April 1998, for unicast routing	IETF RFC-1583, OSPF Version 2, March 1994		IETF STD 54/RFC-2328 obsoletes IETF RFC-1583, for unicast routing.
2.3.2.2.1.2.2 Exterior Routers	IETF RFC-1771, Border Gateway Protocol 4, (BGP-4) 21 March 1995	same		
	IETF RFC-1772, Application of BGP-4 In the Internet, March 1995	same		
2.3.2.2.2.1 Local Area Network Access	ISO/IEC 8802-3:1996, Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications, 10BASE-T Medium-Access Unit (MAU)	same		
	IEEE 802.3u-1995, Supplement to ISO/IEC 8802-3:1993, Local and Metropolitan Area Networks: Media Access Control (MAC) Parameters, Physical Layer, Medium Attachment Units, and Repeater for 100 Mbp/s Operation, Type 100BASE-T (Clauses 21-30)	same		
	IETF Standard 41/RFC-894, Standard for the Transmission of IP Datagrams Over Ethernet Networks, April 1984	same		
	IETF Standard 37/RFC-826, An Ethernet Address Resolution Protocol, November 1982	same		
2.3.2.2.2.2 Point to Point Standards	IETF Standard 51/RFC-1661/RFC-1662, Point-to-Point Protocol (PPP), July 1994	same		
	IETF RFC-1332, PPP Internet Protocol Control Protocol (IPCP), May 1992	same		
	IETF RFC-1989, PPP Link Quality Monitoring (LQM), 16 August 1996	same		



## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	IETF RFC-1994, PPP Challenge Handshake Authentication Protocol (CHAP), 30 August 1996	same		
	IETF RFC-1570, PPP Link Control Protocol (LCP) Extensions, January 1994	same		
	EIA/TIA 232-F, Interface Between Data Terminal Equipment and Data Circuit Terminating Equipment Employing Serial Binary Data Interchange, October 1997.	EIA/TIA 232E, Interface Between Data Terminal Equipment and Data Circuit Terminating Equipment Employing Serial Binary Data Interchange, July 1991		
	EIA/TIA 530-A, High Speed 25-Position Interface for Data Terminal Equipment and Data Circuit-Terminating Equipment, Including Alternative 26-Position Connector, December 1998 (This calls out EIA/TIA 422-B and 423-B.)	EIA/TIA 530A, High Speed 25-Position Interface for Data Terminal Equipment and Data Circuit-Terminating Equipment, June 1992, Including Alternate 26-Position Connector, 1992		
2.3.2.2.2.3 Combat Net Radio Networking	MIL-STD-188-220B, Interoperability Standard for Digital Message Transfer Device (DMTD) Subsystems, 20 January 1998	same		
2.3.2.2.2.4 Integrated Services Digital Network	ANSI T1.601, ISDN Basic Access Interface for Use on Metallic Loops for Application on the Network Side of the NT (Layer 1 Specification), 1992	same		
	ANSI T1.605, ISDN Basic Access Interface for S and T Reference Points – Layer 1 Specification, 1991			
	ANSI T1.408, ISDN Primary Rate - Customer Installation Metallic Interfaces (Layer 1 Specification), 1990	same		
	ANSI T1.602, ISDN Data Link Signaling Specification for Application at the User Network Interface, 1996	same		
	ANSI T1.607, Digital Subscriber Signaling System No. 1 (DSS1) - Layer 3 Signaling Specification for Circuit Switched Bearer Service, 1998	same		
	ANSI T1.610, DSS1 - Generic Procedures for the Control of ISDN Supplementary Services, 1994	same		

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ANSI T1.619, Multi-Level Precedence and Preemption (MLPP) Service, ISDN Supplementary Service Description, 1992	same		
	ANSI T1.619a, Supplement, 1994.	same		
	ANSI T1.111, Signaling System No. 7, Message Transfer Part, 1996.			
	ANSI T1.112, Signaling System No. 7, Signaling Connection Control Part Functional Description, 1996.			
	ANSI T1.113, Signaling System No. 7, ISDN User Part, 1995.			
	ANSI T1.114, Signaling System No. 7, Transaction Capability Application Part, 1996.			
	SR-3875, National ISDN 2000, Telcordia (formerly Bellcore), May 1999.	SR-3875, National ISDN 1995, 1996, & 1997, Bellcore		Updated version of SR-3875
	SR-4620, 1999 Version of National ISDN Basic Rate Interface Customer Premise Equipment Generic Guidelines, Telecordia, December 1998.	SR-3888, 1997 Version of National ISDN Basic Rate Interface Customer Premise Equipment Generic Guidelines, Bellcore		Updates SR 3888
	SR-4619, 1998 Version of National ISDN Primary Rate Interface Customer Premise Equipment Generic Guidelines, Telecordia, December 1998.	SR-3887, 1997 Version of National ISDN Primary Rate Interface Customer Premise Equipment Generic Guidelines, Bellcore		Updates SR-3887.
	ITU-T E.164, Numbering Plan for the ISDN Era, May 1997	same		
	DISA Circular (DISAC) 310-225-1, Defense Switched Network (DSN) User Services Guide, 2 April 1998	same		
	IETF RFC-1356, Multiprotocol Interconnect on X.25 and ISDN in the Packet Mode, 6 August 1992	same		
	IETF RFC-1618, PPP over ISDN, 13 May 1994	same		
2.3.2.2.2.5 Asynchronous Transfer Mode	ATM Forum, af-phy-0040.000, Physical Interface Specification for 25.6 Mbps over twisted pair, November 1995	same		For Physical Layer
	ATM Forum, af-uni-0010.002, ATM UNI Specification V3.1, Section 1 and 2.4, September 1994	same		For Physical Layer

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ATM Forum, af-phy-0015.000, ATM Physical Medium Dependent Interface for 155 Mbps over Twisted Pair Cable, September 1994.			
	ATM Forum, af-phy-0016.000, DS1 Physical Layer Specification, September 1994	same		For Physical Layer
	ATM Forum, af-phy-0054.000, DS3 Physical Layer Interface Specification, January 1996	same		For Physical Layer
	ATM Forum, af-phy-0046.000, 622.08 Mbp/s Physical Layer Specification, January 1996	same		For Physical Layer
	ATM Forum, af-phy-0064.000, E1 Physical Interface Specification, September 1996.			For Physical Layer
	ATM Forum, af-phy-0043.000, A Cell-based Transmission Convergence Sublayer for Clear Channel Interfaces, November 1995.			
	ATM Forum, af-uni-0010.002, ATM UNI Specification V 3.1, September 1994	same		For User to Network Interface
	ATM Forum, af-sig-0061.000, ATM UNI Signaling Specification, Version 4.0, July 1996			For User to Network Interface
	ATM Forum, af-ilmi-0065.000, Integrated Local Management (ILMI) Specification, Version 4.0, September 1996			For Layer Management Capabilities
	ATM Forum, af-uni-0010.002, ATM UNI Specification V 3.1, (Section 4: ILMI for UNI 3.1), September 1994	same		For Layer Management Capabilities
	ATM Forum, af-tm-0056-000, Traffic Management Specification, Version 4.0, April 1996			For Traffic Management Functions
	ATM Forum, af-vtoa-0078.000, Circuit Emulation Service Interoperability Specification 2.0, January 1997			For Circuit Emulation Functions
	ITU-T I.363.1, B-ISDN ATM Adaptation Layer Specification: Type 1 ATM Adaptation Layer (AAL1), August 1996.	ANSI T1.630		For AAL1 Functions
	ITU-T I.363.5, B-ISDN ATM Adaptation Layer Specification: Type 5 ATM Adaptation Layer (AAL5), August 1996.	ANSI T1.635		For AAL5 Functions
	ATM Forum, af-pnni-0055.000, Private Network to Network Interface (PNNI) Specification, Version 1.0, March 1996.	same		For Private Network to Network Interfaces

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ATM Forum, af-pnni-0066.000, PNNI Specification, Version 1.0 Addendum (Soft PVC MIB), September 1996.	same		For Private Network to Network Interfaces
	ATM Forum, af-lane-0021.000, Local Area Network Emulation (LANE) Over ATM, Version 1.0, January 1995.	same		For LAN Emulation and IP over ATM
	ATM Forum, af-lane-0038.000, LAN Emulation Client Management Specification, September 1995.	same		For LAN Emulation and IP over ATM
	ATM Forum, af-lane-0050.00, LANE Over ATM, Version 1.0 Addendum, December 1995.	same		For LAN Emulation and IP over ATM
	ATM Forum, af-lane-0057.000, LANE Servers Management Specification 1.0, March 1996	same		For LAN Emulation and IP over ATM
	ATM Forum, af-mpoa-0087.000, Multi-Protocol Over ATM, Version 1.0, July 1997.			
	DoD ATM Addressing Plan, 17 April 1998	ATM Addressing Format specified as Notice of Change 1, 20 Oct 1997, to MIL-STD-188-176, Standardized Profile for ATM, 21 May 1996		Same Addressing Plan under separate cover.
2.3.2.3.1.1.1 5- and 25-kHz Service	MIL-STD-188-181B, Interoperability Standard for Single Access 5-kHz and 25-kHz UHF Satellite Communications Channels, 20 March 1999.	MIL-STD-188-181A, Interoperability Standard for Single Access 5-kHz and 25-kHz UHF Satellite Communications Channels, 31 March 1997.		
2.3.2.3.1.1.2 5-kHz DAMA Service	MIL-STD-188-182A, Interoperability Standard for 5 kHz UHF DAMA Terminal Waveform, 31 March 1997; with Notice of Change 1, 9 September 1998; and Notice of Change 2, 22 January 1999.	same without Notices of Change		
2.3.2.3.1.1.3 25-kHz TDMA/DAMA Service	MIL-STD-188-183A, Interoperability Standard for 25 kHz TDMA/DAMA Terminal Waveform (Including 5- and 25-Khz Slave Channels), 20 March 1998; with Notice of Change 1, dated 9 September 1998.	MIL-STD-188-183, Interoperability Standard for 25 kHz UHF/TDMA/DAMA Terminal Waveform, 18 September 1992, with Notice of Change 1, dated 2 December 1996		
2.3.2.3.1.1.4 Data Control Waveform	MIL-STD-188-184, Interoperability and Performance Standard for the Data Control Waveform, 20 August 1993; with Notice of Change 1, 9 September 1998.	same without Notice of Change		Added "Notice of Change 1".

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.3.2.3.1.1.5 DAMA Control System	MIL-STD-188-185, DoD Interface Standard, Interoperability of UHF MILSATCOM DAMA Control System, 29 May 1996; with Notice of Change 1, 1 December 1997; and Notice of Change 2, 9 September 1998.	same without Notices of Change		Added "Notice of Change 2"
2.3.2.3.1.2.1 Earth Terminals	MIL-STD-188-164, Interoperability and Performance Standards for C-Band, X-Band, and Ku-Band SHF Satellite Communications Earth Terminals, 13 January 1995; with Notice of Change 1, 9 September 1998.	same without Notice of Change		Added "Notice of Change 1"
2.3.2.3.1.2.2 Phase-Shift Keying Modems	MIL-STD-188-165, Interoperability and Performance Standards for SHF Satellite Communications PSK Modems (Frequency Division Multiple Access (FDMA) Operations), 13 January 1995; with Notice of Change 1, 9 September 1998.	same without Notice of Change		Added "Notice of Change 1"
2.3.2.3.1.3.1 Low Data Rate	MIL-STD-1582D, EHF LDR Uplinks and Downlinks, 30 September 1996; with Notice of Change 1, 14 February 1997; Notice of Change 2, 17 February 1999.	same without Notice of Change 2		Added "Notice of Change 2"
2.3.2.3.1.3.2 Medium Data Rate	MIL-STD-188-136A, EHF MDR Uplinks and Downlinks, 8 June 1998	MIL-STD-188-136, EHF MDR Uplinks and Downlinks, 26 August 1995; with Notice of Change 1, 15 August 1996, and Notice of Change 2, 14 February 1997		Updated version of MIL-STD-188-136
2.3.2.3.2.1 Low Frequency and Very Low Frequency	MIL-STD-188-140A, Equipment Technical Design Standards for Common Long Haul/Tactical Radio Communications in the LF Band and Lower Frequency Bands, 1 May 1990	same		
2.3.2.3.2.2.1 HF and Automated Link Establishment	MIL-STD-188-141B, Interoperability and Performance Standards for Medium and High Frequency Radio Systems, 1 March 1999.	MIL-STD-188-141A, Interoperability and Performance Standards for Medium and High Frequency Radio Equipment Standard, 15 September 1988; with Notice of Change 1, 17 June 1992; and Notice of Change 2, 10 September 1993		

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.3.2.3.2.2.2 Anti-Jamming Capability	MIL-STD-188-148A, Interoperability Standard for Anti-Jam Communications in the HF Band (2-30 MHz), 18 March 1992	same		
2.3.2.3.2.2.3 Data Modems	MIL-STD-188-110A, Data Modems, Interoperability and Performance Standards, 30 September 1991	same		
2.3.2.3.2.3 Very High Frequency	MIL-STD-188-242, Tactical Single Channel (VHF) Radio Equipment, 20 June 1985	same		
2.3.2.3.2.4.1 UHF Radio	MIL-STD-188-243, Tactical Single Channel (UHF) Radio Communications, 15 March 1989	same		
2.3.2.3.2.4.2 Anti-Jamming Capability	STANAG 4246, Edition 2, HAVE QUICK UHF Secure and Jam-Resistant Communications Equipment, 17 June 1987; with Amendment 3, August 1991	same		
2.3.2.3.2.5 Super High Frequency	MIL-STD-188-145, Digital Line-of-Sight (LOS) Microwave Radio Equipment, 7 May 1987; with Notice of Change 1, 28 July 1992	same		
2.3.2.3.2.6 Link 16 Transmission Standards	STANAG 4175, Edition 1, Technical Characteristics of the Multifunctional Information Distribution System (MIDS), 29 August 1991	same		Previous section (service area) in Volume 1.0 was named "JTIDS/MIDS Transmission Media"
2.3.2.3.3 SONET Transmission Facilities	ANSI T1.105, Telecommunications – Synchronous Optical Network (SONET) Basic Description Including Multiplex Structure, Rates and Formats (ATIS) (Revision and Consolidation of ANSI T1.105-1991 and ANSI T1.105A-1991), 1995	same		
	ANSI T1.107, Digital Hierarchy – Formats Specifications, 1995	same		
	ANSI T1.117, Digital Hierarchy – Optical Interface Specifications (SONET) (Single Mode – Short Reach), 1991	same		
2.3.2.4.1 Data Communications Management	IETF Standard 15/RFC-1157, Simple Network Management Protocol (SNMP), May 1990	same		
	IETF Standard 16/RFC-1155/RFC-1212, Structure of Management Information, May 1990	same		

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	IETF Standard 17/RFC-1213, Management Information Base, March 1991	same		
	IETF RFC-1514, Host Resources MIB, September 1993	same		
	IETF Standard 50/RFC-1643, Definitions of Managed Objects for the Ethernet-like Interface Types, July 1994	same		
	IETF RFC-1757, Remote Network Monitoring Management Information Base (RMON Version 1), February 1995	same		
	IETF RFC-1850, Open Shortest Path First (OSPF) Version 2 Management Information Base, November 1995	same		
2.3.2.4.2 Telecommunications Management	ANSI T1.204, OAM&P – Lower Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements, 1997.	ANSI T1.204, OAM&P – Lower Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements, 1993.		
	ANSI T1.208, OAM&P – Upper Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements, 1997	ANSI T1.208, OAM&P – Upper Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements, 1993		
	ITU-T M.3207.1, TMN management service: maintenance aspects of B-ISDN management, 1996	same		
	ITU-T M.3211.1, TMN management service: Fault and performance management of the ISDN access, 1996	same		
	ITU-T M.3400, TMN Management Functions, 1997	ITU-T M.3400, TMN Management Functions, 1992		
	ISO/IEC 9595:1998: Information Technology – Open Systems Interconnection Common Management Information Services.	ISO/IEC 9595, Information Technology – Open Systems Interconnection Common Management Information Services, December 1991		

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	ISO/IEC 9596-1:1998 Information Technology – Open Systems Interconnection – Common Management Information Protocol (CMIP) – Part 1: Specification	ISO/IEC 9596-1:1991 Information Technology – Open Systems Interconnection – Common Management Information Protocol (CMIP) – Part 1: Specification		
	ISO/IEC 9596-2:1993 Information Technology – Open Systems Interconnection – Common Management Information Protocol: Protocol Implementation Conformance Statement (PICS) proforma	same		
2.3.3.1.1 Internet Standards			IETF RFC 2374, IPv6 Aggregatable Global Unicast Address Format, July 1998	
			IETF RFC 2452, IP Version 6 Management Information Base for the Transmission Control Protocol, December 1998.	
			IETF RFC 2454, IP Version 6 Management Information Base for the User Datagram Protocol, December 1998.	
			IETF RFC 2460, Internet Protocol, Version 6 (IPv6) Specification, December 1998.	
			IETF RFC 2461, Neighbor Discovery for IP Version 6, (IPv6), December 1998	
			IETF RFC 2462, IPv6 Stateless Address Autoconfiguration, December 1998.	



### Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			ETF RFC 2463, Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification, December 1998.	
			IETF RFC 2464, Transmission of Ipv6 Packet Over Ethernet Networks, December 1998	
			IETF RFC 2466, Management Information Base for IP Version 6: ICMPv6 Group, December 1998	
			IETF RFC 2472, IPv6 Over PPP, December 1998	
			IETF RFC 2492, IPv6 Over ATM Networks, January 1999.	
			IETF RFC 2205 Resource ReSerVation Protocol RSVP Version 1, September 1997.	
			IETF RFC 2207, RSVP Extensions for IPSEC Data Flows, September 1997.	
			IETF RFC 2380, RSVP over ATM Implementation Requirements, August 1998.	

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IEEE 802.1p and IEEE 802.1Q	These IEEE standards specify the traffic classification method used by Ethernet switches, to expedite delivery of time critical traffic. IEEE 802.1p governs the prioritization of packets, offering eight discrete priority levels from the default (best effort) through reserved (highest priority). IEEE 802.1Q defines an additional 4-octet field in the LAN header to support Virtual LANs.
2.3.3.1.2 Video Teleconferencing Standards			ITU-T H.310	ITU-T H.310 includes underlying standards for video (MPEG2) and audio (MPEG1, MPEG2). H.310 can be used for high-quality VTC requiring >2 Mbps infrastructure, but does not currently have much industry support.

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			ITU-T H.321	ITU-T H.321 specifies the operation of H.320 codecs over ATM using AAL-1 or AAL-5. H.321 uses Quality of Service to manage videoconferencing quality. It lacks industry wide support.
			ITU-T H.323	ITU-T H.323 has the most industry support for VTC over ATM. It provides for two modes of operation over ATM: 1) IP over ATM media stream and 2) Real-Time Protocol (RTP) over ATM media stream transport (H.323 Annex C). Implementation of H.323 over non-LAN media (e.g., Metropolitan Area Networks (MANs) and WANs, such as the Internet, SIPRNET, JWICS) is still evolving.
2.3.3.1.3 Space Communications Protocol			MIL-STD-2045-44000: Department of Defense Interface Standard: Transport Protocol for High-Stress, Resource-Constrained Environments, 30 September 1997.	New Service Area: Space Communications Protocol

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			MIL-STD-2045-43000: Department of Defense Interface Standard: Network Protocol for High-Stress, Resource-Constrained Environments, 30 September 1997	New Service Area: Space Communications Protocol
			MIL-STD-2045-47000: Department of Defense Interface Standard: File and Record Transfer Protocol for Resource-Constrained Environments, 30 September 1997	New Service Area: Space Communications Protocol
			MIL-STD-2045-43001: Department of Defense Interface Standard: Network Security Protocol for Resource-Constrained Environments, 30 September 1997	New Service Area: Space Communications Protocol
2.3.3.2 Network Standards			af-vtoa-0119.00, Low Speed Circuit Emulation Service, May 1999.	
2.3.3.5 Network Management			IETF RFC 1695 Asynchronous Transfer Mode (ATM) MIB	Defines a set of standard objects for managing ATM switches.
			IETF RFC 1657 Definitions of Management Objects for the Fourth Version of the Border Gateway Protocol (BGP-4) using SMIv2, July 1994	Defines a set of standard objects for managing this internetwork routing protocol.

### Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IETF RFC 1611, DNS Server MIB Extensions, May 1994	Defines a set of standard objects for managing this internetwork routing protocol.
			IETF RFC 1612, DNS Resolver MIB Extensions, May 1994.	Defines a set of standard objects for managing this internetwork routing protocol.
			IETF RFC-2006 Definitions of Managed objects for IP Mobility Support using SMIv2, October 1996.	Defines a set of standard objects for managing traditional static IP and emerging mobile IP services.
			IETF RFC 2011, SNMPv2 Management Information Base for the Internet Protocol, November 1996.	
			IETF RFC 1471 Definitions of Managed Objects for the Link Control Protocol of the Point-Point Protocol, June 1993.	Define a set of standard objects for managing PPP links, security, IP network level, and bridge-level services.
			IETF RFC 1472, Definitions of Managed Objects for the Security Protocol of the Point-to-Point Protocol, June 1993.	

## Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IETF RFC 1473, Definitions of Managed Objects for the IP Network Control Protocol of the Point-to-Point Protocol, June 1993.	
			IETF RFC 1474, Definitions of Managed Objects for the Bridge Network Control Protocol of the Point-to-Point Protocol, June 1993.	
			IETF RFC 2021, Remote Network Monitoring Management Information Base Version 2, using SMIv2, January 1997.	Defines a set of standard objects for monitoring protocol communications services across a subnetwork on all seven layers of the OSI model.
			IETF RFC 2012, SNMPv2 Management Information Base for the Transmission Control Protocol (TCP), November 1996.	Defines a set of standard objects for managing a system's TCP services.
			IETF RFC 2013, SNMPv2 Management Information Base for the User Datagram Protocol (UDP), November 1996.	Defines a set of standard objects for managing a system's UDP services.
			IETF RFC 1567, X.500 Directory Monitoring MIB, January 1994.	Currently defines a set of standard objects for monitoring X.500 directory services and is being updated to add support for LDAP.

### Section 2.3 – Information-Transfer Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IETF RFC 2248, Network Services Monitoring MIB, January 1998.	Defines MIB that serves as a basis for application specific monitoring and management.
			IETF RFC 2249, Mail Monitoring MIB, January 1998.	Allows for the monitoring of Message Transfer Agents (MTAs).

This page intentionally left blank.



## Section 2.4 – Information-Modeling, Metadata, and Information Exchange Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.4.2.1 Activity Modeling	IEEE 1320.1-1998, IEEE Standard for Functional Modeling Language—Syntax and Semantics for IDEF0.	FIPS PUB 183, Integration Definition for Function Modeling (IDEF0), December 1983, as based on the Air Force Wright Aeronautical Laboratories Integrated Computer-Aided Manufacturing (ICM) Architecture, Part II, Volume IV – Function Modeling Manual (IDEF0), June 1981.		
2.4.2.2 Data Modeling	DoD Manual 8320.1-M-1, DoD Data Standardization Procedures, April 1998 (which mandates the use of the DDM).	same		
	FIPS PUB 184, Integration Definition for Information Modeling (IDEF1X), December 1993	same		
2.4.2.3 DoD Data Model Implementation	DoD Manual 8320.1-M-1, DoD Data Standardization Procedures, April 1998	same		
2.4.2.4 DoD Data Definitions	DoD Manual 8320.1-M-1, DoD Data Standardization Procedures, April 1998	same		
	Defense Data Dictionary System (DDDS)	same		The DoD Data Model, used by the DDDS, is updated semi-annually (DDM is released in April and October) and data elements are updated dynamically as submitted by DoD Services, Agencies and Components.

## Section 2.4 – Information-Modeling, Metadata, and Information Exchange Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	Secure Intelligence Data Repository (SIDR)	same		The DoD Data Model, used by the SIDR, is updated semi-annually (DDM is released in April and October) and data elements are updated dynamically as submitted by DoD Services, Agencies and Components.
2.4.2.4.1 DoD Date Standards	Calendar Date: DDDS Counter ID # 195 Format: YYYYMMDD (8-digit contiguous) Where: YYYY = year; MM = month; DD = day (Also referenced in ISO 8601, ANSI X3.30-1985, and FIPS PUB 4-1)	same		
	Ordinal Date: DDDS Counter ID # 165 Format: YYYYDDD (7-digit contiguous) Where: YYYY = year; DDD = ordinal day within year (Also referenced in ISO 8601)	same		
	Year Date: DDDS Counter ID #166 Format: YYYY (4-digit contiguous) Where: YYYY = year (Also referenced in ISO 8601)	same		
2.4.2.5.2.1 Bit-Oriented Formatted Messages	MIL-STD-6016A, Tactical Digital Information Link (TADIL) J Message Standard, 30 April 1999.	MIL-STD-6016, Tactical Digital Information Link (TADIL) J Message Standard, 7 February 1997.		
	STANAG 5516, Edition 1, Tactical Data Exchange - LINK 16, Ratified 15 January 1997	same		
	Variable Message Format (VMF) Technical Interface Design Plan - Test Edition (TIDP-TE), Reissue 3, 17 June 1998.	Joint Interoperability of Tactical Command and Control Systems Variable Message Format (VMF) Technical Interface Design Plan (Test Edition) Reissue 2, August 1996.		

## Section 2.4 – Information-Modeling, Metadata, and Information Exchange Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.4.2.5.2.2 Character-Based Formatted Messages	MIL-STD-6040, United States Message Text Format (USMTF), 31 March 1999.	MIL-STD-6040, United States Message Text Format (USMTF), 1 January 1997.		
2.4.3.1 Object Modeling			IEEE 1320.2-1998, IEEE Standard Conceptual Modeling Language-Syntax and Semantics for IDEF1X97 (IDEFobject).	
			Object Management Group (OMG) Unified Modeling Language (UML) Specification, Version 1.3, June 1999.	
2.4.3.3 Information Exchange Standards			Multi-functional Information Distribution System (MIDS).	MIDS is a planned replacement for the Joint Tactical Information Distribution System (JTIDS). MIDS will provide secure jam-resistant communications, utilizing tactical digital data and voice. Message format standards for MIDS will not change from those of the JTIDS.
			STANAG 5522, Edition 1, Tactical Data Exchange - LINK 22 (Undated), 15 September 1995.	ADSIA((DLWG)-RCU-C-74-95, is the Multi-national Group (MG) agreed Configuration Management (CM) baseline document.

Page intentionally left blank.

## Section 2.5 – Human-Computer Interface Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.5.2.1.1 Character-Based Interfaces	DoD Human Computer Interface HCI Style Guide, 30 April 1996	DoD HCI Style Guide, TAFIM Version 2.0, Volume 8, 30 September 1994		
2.5.2.2.1.1 X-Window Style Guides	Open Software Foundation (OSF) M027: CDE 2.1/Motif 2.1 – Style Guide and Glossary, ISBN 1-85912-104-7, October 1997	Open Software Foundation (OSF)/Motif Style Guide, Revision 1.2 (OSF 1992)		
	Open Software Foundation (OSF) M028: CDE 2.1/Motif 2.1 – Style Guide Certification Check List, ISBN 1-85912-1098, October 1997.	Open Software Foundation (OSF)/Motif Style Guide, Revision 1.2 (OSF 1992)		
	Open Software Foundation (OSF) M029: CDE 2.1/Motif 2.1 – Style Guide Reference, ISBN 1-85912-114-4, October 1997.	Open Software Foundation (OSF)/Motif Style Guide, Revision 1.2 (OSF 1992)		
2.5.2.2.1.2 Windows Style Guide	The Windows Interface Guidelines for Software Design, Microsoft Press, 1995	same		
2.5.2.2.2 DoD Human-Computer Interface Style Guide	DoD HCI Style Guide, 30 April 1996	same		
2.5.2.2.3 Domain-Level Style Guides	User Interface Specification for the Defense Information Infrastructure (DII), Version 3.0, February 1998.	User Interface Specification for the Defense Information Infrastructure (DII), Version 2.0, June 1996		Version 1.0 had incorrectly cited “User Interface Specification for the Global Command and Control System (GCCS), October 1994” as the mandated standard in Appendix B
2.5.2.3 Symbology	MIL-STD-2525B, Common Warfighting Symbology, 30 January 1999	MIL-STD-2525A, Common Warfighting Symbology, 15 December 1996.		

## Section 2.5 – Human-Computer Interface Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.5.3 Emerging Standards			MIL-PRF-89045, DoD Performance Specification Geospatial Symbols for Digital Displays (GeoSym™) , 20 February 1998.	

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.6.2.2.1 Application Software Entity Security Standards	DoD 5200.28-STD, The Department of Defense Trusted Computer System Evaluation Criteria, December 1985	same		
	NCSC-TG-021, Version 1, Trusted Database Management System Interpretation, April 1991	same		
	FORTEZZA Application Implementers' Guide, MD4002101-1.52, 5 March 1996	same		
	FORTEZZA Cryptologic Interface Programmers' Guide, MD4000501-1.52, 20 October 1997.	FORTEZZA Cryptologic Interface Programmers' Guide, MD4000501-1.52, 30 January 1996		
2.6.2.2.2.1 Data Management Services	NCSC-TG-021, Version 1, Trusted Database Management System Interpretation, April 1991	same		
2.6.2.2.2.2 Operating System Services Security	DoD 5200.28-STD, The DoD Trusted Computer System Evaluation Criteria, December 1985	same		
2.6.2.2.2.2.1 Security Auditing and Alarm Standards	DoD 5200.28-STD, The DoD Trusted Computer System Evaluation Criteria, December 1985	same		
2.6.2.2.2.2.2 Authentication Security Standards	IETF RFC-1510, The Kerberos Network Authentication Service, Version 5, 10 September 1993	same		
	FIPS PUB 112, Password Usage, 30 May 1985	same		
2.6.2.3.1.1 Host Security Standards	FORTEZZA Interface Control Document, Revision P1.5, 22 December 1994	same		
	FIPS-PUB 140-1, Security Requirements for Cryptographic Modules, 11 January 1994.			

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.6.2.3.1.1.1 Security Algorithms	FIPS PUB 180-1, Secure Hash Algorithm-1, April 1995.			Note: The Hash function provides a check for data integrity.
	FIPS PUB 186-1, Digital Signature Standard (DSS) Digital Signature Algorithm (DSA), December 1998.	FIPS PUB 186, Digital Signature Standard, May 1994		
	FIPS PUB 185, SKIPJACK algorithm, February 1994, NSA, R21-TECH-044-91, 21 May 1991.	SKIPJACK, NSA, R21-TECH-044, 21 May 1991		
	R21-TECH-23-94, Key Exchange Algorithm (KEA), NSA, 12 July 1994	same		
2.6.2.3.1.1.2 Security Protocols	MIL-STD-2045-48501, Common Security Label, 25 January 1995	same		
	ITU-T Rec. X.509 (ISO/IEC 9594-8.2), Version 3, The Directory: Authentication Framework, 1997	ITU-T Rec. X.509 (ISO/IEC 9594-8.2), Version 3, The Directory: Authentication Framework, 1993		
	ACP-120, Allied Communications Publication 120, Common Security Protocol (CSP), Rev. A, 7 May 1998.	ACP-120, Allied Communications Publication 120, Common Security Protocol (CSP), 1997		
	SDN.903, revision 3.2, Secure Data Network System (SDNS) Key Management Protocol (KMP), 1 August 1989	same		
2.6.2.3.1.1.3 Evaluation Criteria Security Standards	DoD 5200.28-STD, The DoD Trusted Computer System Evaluation Criteria, December 1985	same		
	NCSC-TG-005, Version 1, Trusted Network Interpretation, July 1987	same		
2.6.2.3.2 Network Security Standards	SDN.301, Revision 1.5, Secure Data Network System (SDNS) Security Protocol 3 (SP3), 1989	same		



## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	MIL-STD-2045-48501, Common Security Label, 25 January 1995	same		
2.6.2.5 Human-Computer Interface Security Standards	DoD Human-Computer Interface Style Guide, 30 April 1996	DoD Human-Computer Interface Style Guide, TAFIM, Version 3.0, Volume 8, 30 April 1996		
2.6.2.6 Web Security Standards	Secure Sockets Layer (SSL) Protocol Version 3.0, 18 November 1996.			
2.6.3.2.1.1 Evaluation Criteria Security Standards			ISO/IEC JTC1/SC27/WG3 N304, 23 April 1996, Evaluation Criteria for Information Technology Security (Common Criteria)	
			FDIS 15408, Common Criteria, Version 2.0, October 1998.	
2.6.3.2.1.2 Web Security Standards			IETF-RFC 2246, The Transfer Layer Security (TLS) Protocol Version 1.0, January 1999.	
			IETF-RFC 2487, SMTP Service Extension for Secure SMTP over TLS, January 1999.	
2.6.3.2.2.1.1 Generic Security Service – Application Program Interface Security			IETF RFC 2078, Generic Security Service Application Program Interface, Version 2, January 1997.	
			Independent Data Unit Protection Generic Security Service Application Program Interface (DUP-GSS-API), <draft-ietf-cat-idup-gss-07.txt>, 25 March 1997.	

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
2.6.3.2.2.2.2 Authentication Security Standards			IETF-RFC-2289, A One-Time Password System, February 1998.	
			IETF RFC 2138, Remote Authentication Dial In User Service (RADIUS), April 1997	
2.6.3.2.2.3 Distributed-Computing Services Security Standards			C311, DCE Authentication and Security Specification, August 1997.	
			OMG document formal/98-12-10, CORBA Security Service 1.2, December 1998.	
2.6.3.3.1.1.1 Security Protocols			IEEE 802.10, Standards for Local and Metropolitan Networks: Interoperable LAN/MAN Security (SILS), 1998.	This standard provides specification for an interoperable data link layer security protocol and associated security services. It discusses services, protocols, data formats, and interfaces to allow IEEE products confidentiality. A security label option is specified that enables rule-based access control to be implemented using the Security Data Exchange (SDE) protocol

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IEEE 802.10c-1998, Interoperable LAN/MAN Security (ILS) Key Management (Clause 3). Key management on IEEE 802 Local Area Networks (LANs) and Metropolitan Area Networks (MANs) is described and published separately as IEEE 802.10c-1998. This is a supplement to IEEE 802.10-1992 and is still recognized as valid in the 1998 version of 802.10-1998. Clause 3 specifies a cryptographic key management model and Key Management Protocol (KMP).	
2.6.3.3.1.1.2.2 Certificate Profiles			International Telecommunications Union - Telecommunications (ITU-T) Recommendation X.509, "Information Technology – Open Systems Interconnection – The Directory: Authentication Framework," June 1997 as profiled by RFC 2459, "Internet X.509 Public Key Infrastructure Certificate and CRL Profile," January 1999, IETF Proposed Standard, Federal Public Key Infrastructure Technical Working Group (FPKITWG)	

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			document TWG-98-07, "Federal PKI X.509 Certificate and CRL Extensions Profile," 9 March 1998; and DOD Certificate Profile, as defined in MITRE Technical Report 98W, "Department of Defense (DOD) Medium Assurance Public Key Infrastructure (PKI) Functional Specification (Draft)," Version 0.3, 20 October 1998, Appendices A-D.	
2.6.3.3.1.1.2.3 Operational Protocols and Exchange Formats			IETF RFC 2559, Internet X.509 Public Key Infrastructure Operational Protocols: LDAPv2," April 1999, IETF Proposed Standard	
			IETF RFC2587, Internet X.509 Public Key Infrastructure LDAPv2 Schema," June 1999, IETF Proposed Standard.	
			RSA Laboratories Public Key Cryptography Standard #12, "Personal Information Exchange Syntax Standard," version 1.0 (Draft), 30 April 1997.	
2.6.3.3.1.1.2.4 Management Protocols			IETF RFC 2315, Public Key Cryptography Standard (PKCS) #7, Cryptographic Message Syntax, Version 1.5, March 1998, Informational RFC.	

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IETF RFC 2314, PKCS #10, Certification Request Syntax, Version 1.5, March 1998, Informational RFC.	
2.6.3.3.1.1.2.5 Application Program Interfaces (APIs)			RSA Laboratories Public Key Cryptography Standard (PKCS) #11, "Cryptographic Token Interface Standard," version 1.0, 28 April 1995.	
2.6.3.3.1.1.2.6 Cryptography			RSA Laboratories Public Key Cryptography Standard (PKCS) #1, "RSA Cryptography Standard," Version 2.0, 1 October 1998.	
			FIPS PUB 140-1 "Security Requirements for Cryptographic Modules," 11 January 1994. (DOD X.509 Certificate Policy specifies the FIPS 140-1 security levels required for PKI users, RAs, and CAs).	
			Draft FIPS PUB 46-3, "Data Encryption Standard," 8 January 1999. (This replaces DES with Triple DES, as specified in ANSI X9.52).	
			FIPS PUB 180-1, "Secure Hash Algorithm," April 1995.	
2.6.3.3.2.1 Internetworking Security Standards			IETF RFC 2401, Security Architecture for the Internet Protocol, November 1998.	
			IETF RFC 2402, "IP Authentication Header," S. Kent and R. Atkinson, November 1998.	

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IETF RFC 2406 "IP Encapsulating Security Payload (ESP)," November 1998.	
			IETF RFC 2104, HMAC: Keyed-Hashing for Message Authentication, February 1997	
			IETF RFC 1829, The ESP DES-CBC Transform, August 1995	
			IETF RFC 2451, The ESP CBC-Mode Cipher Algorithms, November 1998.	
			IETF RFC 2405, The ESP CBC-Mode Cipher Algorithm with Explicit IV, November 1998.	
			Draft FIPS 46-3, Data Encryption Standard (DES).	
			IETF RFC 2420, The PPP Triple-DES Encryption Protocol (3DESE) as a complement to FIPS 46-3.	
			IETF RFC 2065, DNS Security Extensions, January 1997	
			IETF RFC 2408, "Internet Security Association and Key Management Protocol (ISAKMP)," 21 February 1998.	
			IETF RFC 2407, "The Internet IP Security Domain of Interpretation for ISAKMP," November 1998.	

## Section 2.6 – Information-Security Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IEEE 802.10, IEEE Standards for Local and Metropolitan Area Networks (MANs): Interoperable LAN/ MAN Security (SILS), 1998.	Incorporates IEEE 802.10b-1992 Secure Data Exchange Clause 2. Changed Date.
			IEEE 802.10a, Standard for Interoperable LAN Security – The Model, Draft January 1989	Incorporated into 802.10
			IETF RFC-2228, File Transfer Protocol, October 1997.	

Page intentionally left blank.



### C4ISR Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
C4ISR.2.2.2.1 Still-Imagery Data Interchange	STDI0002, ICHIPB, Support Data Extensions for the National Imagery Transmission Format, Version 1.0, 16 November 1998; as documented in Section 5 of the Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999.	Common Imagery Ground/Surface System (CIGSS) Acquisition Standards Handbook, Version 1, 19 July 1995		
	STDI0002, National Imagery Transmission Format Profile for Image Access Extensions (PIAE), Version 3.0, 25 September 1997; as documented in Section 6 of The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999.	Common Imagery Ground/Surface System (CIGSS) Acquisition Standards Handbook, Version 1, 19 July 1995		
	STDI0002, Airborne Support Data Extension (ASDE), Version 1.0, 13 January 1999; as documented in Section 8 of The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999.	Common Imagery Ground/Surface System (CIGSS) Acquisition Standards Handbook, Version 1, 19 July 1995		
	STDI0002, HISTOA Extension, 25 August 1998; as documented in Section 15 of The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF) Version 2.0, 4 March 1999.			
C4ISR.2.3.2.1.1.1 Common Data Link Standards	System Specification for the CDL Segment, Specification 7681990, Revision D, 29 January 1997.	same		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)
	System Description Document for CDL, Specification 7681996, 5 May 1993.	same		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)
C4ISR.2.3.2.1.1.2 Unattended MASINT Sensor Communication Standards	Interface Specification, Radio Frequency Transmission Interfaces for DoD Physical Security Systems, SEIWG-005, 15 December 1981.	same		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)

### C4ISR Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
C4ISR.2.3.3 Emerging Standards			ICD-SLP-200, September 14, 1998. Interface Control Document (ICD) Title: Sensor Link Protocol.	
C4ISR.2.4.2.1. 1 Target/ Threat Data Interchange Standards	NTSDS Database Implementation Description & Core Schema Definition, Version 1.2a, 19 September 1997.			
	NTSDS Supplemental Schema Definition, Version 1.1, 24 September 1997.			
C4ISR.3.2.2.1 Navigation, Geospatial	SNU-84-1, Revision D Specification for USAF Standard Form, Fit, and Function (F3) Medium Accuracy Inertial Navigation Unit (INS), 21 September 1992.	same		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)
C4ISR.3.2.2.2. 1 Fibre Channel	ANSI X3.230-1994/AM 2-1996, Information Technology – Fibre Channel – Physical and Signaling Interface (FC-PH), with amendments, 24 May 1999.	ANSI X3.230, Information Technology - Fiber Channel - Physical and Signaling Interface (FC-PH), (800 Mb/s), 1 January 1996		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)
C4ISR.3.2.2.2. 2 Firewire	IEEE Std 1394-1995, IEEE Standard for a High Performance Serial Bus, December 1995.			
C4ISR.3.2.2.3 Vehicle/Sensor Telemetry	Telemetry Group, Range Commanders Council, Telemetry Standards, IRIG 106-96, Secretariat, Range Commanders Council, U.S. Army White Sands Missile Range, New Mexico, Chapter 4, Pulse Coded Modulation Standards, Chapter 8 - MIL-STD-1553 Department of Defense Interface Standard for Digital Time Division Command/Response Multiplex Data Bus, 21 March 1996.	same		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)
C4ISR.3.2.2.4 Mission Recorder	Compatibility with the published "AMPEX Digital Instrumentation Recorder DCRSi 240 User Manual."	same		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)
	ANSI X3.175, 19-mm Type ID-1 Recorded Instrumentation - Digital Cassette Tape Form, 1990, ID 1.	same		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)

### C4ISR Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
	Instrumentation Group (IRIG) B format as defined in IRIG Serial Time Code Formats, IRIG 200-98, May 1998.	Instrumentation Group (IRIG) B format as defined in IRIG Document IRIG 104-70, August 1970		This standard previously appeared in the Airborne Reconnaissance Annex (C4ISR.AR)

This page intentionally left blank.

### C4ISR Cryptologic Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
C4ISR.CRY.2.3.2.1.1 Fibre Channel	ANSI X3.230-1994 (FC-PH) Fibre Channel Physical and Signaling Interface.			
C4ISR.CRY.2.3.2.1.2 Gigabit Ethernet	IEEE 802.3z, 1998 Gigabit Ethernet			
C4ISR.CRY.2.3.3.4 Storage Area Networks			ANSI X3.230-1994 (FC-PH) Fibre Channel Physical and Signaling Interface	
C4ISR.CRY.3.2.1 Small Scale Purpose Devices (SPD)	Peripheral Component Interconnect (PCI) Standard Version 2.2, 1999. (PCI is an Intel specification.)			
	PC Card Standard, March 1997 Release (The PC Card standard is a Personal Computer Memory Card International Association (PCMCIA) standard).			
C4ISR.CRY.3.2.2 Backplanes and Circuit Cards	ANSI/VITA 1- 1994, American National Standard for VME64.			
	IEEE 1155-1992, IEEE Standard for VMEbus Extensions for Instrumentation (VXI).			
C4ISR.CRY.3.2.3 Conduction Cooling	IEEE 1101.2-1992, IEEE Standard for Mechanical Core Specifications for Conduction Cooled Eurocards.			
C4ISR.CRY.3.3.1 Backplanes and Circuit Cards			CompactPCI (cPCI) Version 1.0, 1996	

Page intentionally left blank.

### C4ISR Nuclear Command and Control Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
C4ISR.NCC.2 .3.2 Mandate Additions	HDR-SSS-01-S-REC0, Very Low Frequency/Low Frequency (VLF/LF) High Data Rate (HIDAR) Mode Standard.			
	NAVELEX 28687-0119-404; MEECN Message Processing Mode Standard.			
C4ISR.NCC.2 .4.2 Mandate Additions	Emergency Action Procedures (EAP) Chairman Joint Chiefs of Staff (CJCS), Volume V, "CJCS Control Orders (U)," revised annually (U.S. TOP SECRET).			
	EAP CJCS Volume VII, "EAM Dissemination and Force Report Back (U)," revised annually (U.S. TOP SECRET).			
C4ISR.NCC.2 .5.3 Emerging Standards			HMI DIRECT ICD, "Human-Machine Interface (HMI) Design Criteria," CDRL 135C-03,V3.0, 5 March 99.	

Page intentionally left blank.



### C4ISR Space Reconnaissance Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
C4ISR.SR.2.3 .2 Mandated Standards	GR-253, Synchronous Optical Network (SONET) Transport Systems: Common Generic Criteria, Rev01, Bellcore, December 1997.			
C4ISR.SR.2.3 .2.1 Hardware Mandated Standards	EIA RS-422, Electrical Characteristics of Balanced Voltage Digital Interface Circuits, December 1978.			

Page intentionally left blank.

## Combat Support Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
CS.2.2.2.1 Document Interchange	MIL-PRF-28001C, Markup Requirements and Generic Style Specification for Electronic Printed Output and Exchange of Text (CALS SGML), 2 May 1997	same		
	MIL-STD-1840C, Automated Interchange of Technical Information (AITI), 26 June 1997	same		
CS.2.2.2.2 Graphics Data Interchange	ANSI/ISO/IEC 8632, Information Technology – Computer Graphics – Metafile for the Storage and Transfer of Picture Description Information [part 1:1992 Functional Specifications (with amendment 1:1994 Rules for Profiles and with amendment 2:1995 Application Structuring Extensions)] and [part 3:1992 Binary Coding (with amendment 1:1994 Rules for Profiles and with amendment 2:1995 Application Structuring Extensions)] as profiled by MIL-PRF-28003A dated 15 November 1991 with Amendment 1 dated 14 August 1992, Performance Specification, Digital Representation for Communications of Illustration Data: CGM Application Profile.	ANSI/ISO 8632, as profiled by MIL-PRF-28003A, CGM Application Profile, with Amendment 1, 14 August 1992		
	MIL-PRF-28002C, Requirements for Raster Graphics Representation in Binary Format, 30 September 1997	same		
CS.2.2.2.3 Product Data Interchange	ANSI/US Product Data Association (PRO)-100-1996, V5.3, 23 April 1996	FIPS PUB 177-1, IGES, adopts CALS IGES and ANSI/US PRO-100-1993, V5.2, 23 April 1996		
	MIL-PRF-28000A with Amendment 1, Digital Representation for Communications of Product Data: IGES Application Subsets and IGES Application Protocols, 14 December 1992	same		
	ANSI/PC-D-350D, Printed Board Description in Digital Form, July 1, 1992.			
	FIPS Pub 172-1, VHSIC Hardware Description Language (VHDL), 1995 January 27.			
	ANSI/IEEE 1076, 1993, IEEE Standard VHDL Language Reference Manual.			
	MIL-STD-1840C, Automated Interchange of Technical Information (AITI), 26 June 1997	same		
	ANSI/AIM BC1-1995, Uniform Symbology Specification Code 39, 16 August 1995.	same		

### Combat Support Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			ISO/IEC 10303-1:1994, Standards for the Exchange of Product Model Data (STEP), Part 1: Overview and Principles	
CS.2.2.2.4 Electronic Data Interchange	ANSI ASC X12 Electronic Data Interchange (ASC X12S 97-372 is latest edition), as profiled by FIPS PUB 161-2, Electronic Data Interchange, 22 May 1996.	same		
	ISO UN/EDIFACT, as profiled by FIPS PUB 161-2, Electronic Data Interchange, 22 May 1996.	same		
CS.2.2.2.5 Configuration Management Data Interchange	MIL-STD-2549, Configuration Management Data Interface, 30 June 1997	same		

## Combat Support Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
CS.2.2.3.1 Product Data Interchange			ISO 10303, Industrial Automation Systems and Integration - Product Data Representation and Exchange; Part 1, Overview and fundamental concepts, 1994; Part 11, Description methods: The EXPRESS language reference manual, 1994; Part 12, Description methods: The EXPRESS-language reference manual, 1997; Part 21, Implementation methods: Clear text encoding of the exchange structure, 1994; Part 22, Implementation methods: Standard data access interface specification, 1998; Part 31, Conformance testing methodology and framework: General concepts, 1994; Part 32, Conformance testing methodology and framework: Requirements on testing laboratories and clients, 1998; Part 41, Integrated generic resources:	This standard was mandated in 3.0, but moved due to implementation issues,

## Combat Support Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			<p>Fundamentals of product description and support, 1994; Part 42, Integrated generic resources: Geometric and topological representation, 1994; Part 43, Integrated generic resources: Representation structure, 1994; Part 44, Integrated generic resources: Product structure configuration, 1994; Part 45, Integrated generic resources: Materials, 1998; Part 46, Integrated generic resources: Visual presentation, 1994; Part 47, Integrated generic resources: Shape variation tolerances, 1997; Part 49, Integrated generic resources: Process structure and properties, 1998; Part 101, Integrated application resources: Draughting, 1994; Part 105, Integrated application resources: Kinematics, 1996; Part 201, Application protocol: Explicit draughting</p>	

## Combat Support Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			(equivalent to IGES), 1994; Part 202, Application protocol: Associative draughting, 1996; Part 203, Application protocol: Configuration controlled design, 1994; Part 224, Application protocol: Mechanical product definition for process planning using machining features, 1999	
			ISO/IEC 13584:1998, Industrial Automation Systems and Integration -Parts Library -Part 20; Logical Resource: Logical Model of Expressions; Part 42: Description Methodology: Methodology for Structuring Part Families.	
			MIL-PRF-28000B. Digital Representation for Communication of Product Data: IGES Application Subsets and IGES Application Protocols (Draft), 1 July 1999.	

## Combat Support Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
CS.3.1.2.1 Smart Card Technology	ISO/IEC 7816 Identification Cards - Integrated Circuit(s) cards with contacts; Part 1, Physical characteristics, October 1998; Part 2, Dimensions and location of the contacts, March 1999; Part 3, Electronic signals and transmission protocols, December 1997; Part 4, Interindustry commands for interchange, September 1995; Part 5, Numbering system and registration procedure for application identifiers, June 1994; Part 6, Interindustry Data Elements, May 1996; Part 7, Interindustry commands for Structured Card Query Language (SCQL), March 1999.			
	ISO/IEC 10536 Identification Cards - Contactless integrated circuit(s) card; Part 1, Physical characteristics, September 1992; Part 2, Dimensions and location of coupling areas, December 1995; Part 3, Electronic signals and reset procedures, December 1996.			
CS.3.1.3.1 Smart Card Technology			ISO/IEC 7816 Identification Cards - Integrated circuit(s) card with contacts; Part 8, Security architecture and related interindustry commands, November 1998; Part 9, Enhanced interindustry commands, October 1999; Part 10, Electronic signals and answer to reset for synchronous cards, April 1998.	
			ISO/IEC 10536-4 Identification Cards - Contactless integrated circuit(s) card; Part 4, Answer to reset and transmission protocols, September 1995.	



## Combat Support Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			ISO/IEC 14443 Identification Cards - Contactless integrated circuit(s) cards - Proximity integrated circuit(s) cards; Part 1 Physical characteristics, July 1998; Part 2, Radio Frequency Interface, October 1999; Part 3, Initialization and anti- collision, October 1999; Part 4 Transmission protocols, October 1999.	
			ISO/IEC 15693 Identification Cards - Contactless integrated circuit(s) - Vicinity cards; Part 1, Physical characteristics, October 1999; Part 2, Air interface and initialization, October 1999; Part 3, Protocols, October 1999; Part 4, Registration of applications and issuers, October 1996.	

This page intentionally left blank.

### Combat Support Automatic Test System Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
CS.ATS.2.2.2.1.1 Instrument Driver API Standards	VXIplug&play Systems Alliance Instrument Driver Functional Body Specification VPP-3.2, Revision 4.0, 2 February 1996			
CS.ATS.2.2.2.1.2 Digital Test Data Formats	IEEE 1445-1998, Standard for Digital Test Interchange Format (DTIF).			
CS.ATS.2.2.3.1.1 Resource Adapter Interface			IEEE 1226.3-1998 ABBET Resource Management Services.	
			IEEE 1226.11-1998 ABBET Test Resource Information Model.	
			VXIplug&play Systems Alliance VPP-3.1: Instrument Drivers Architecture and Design Specification Revision 4.1 December 4, 1998.	
			VXIplug&play Systems Alliance VPP-3.2: Instrument Driver Functional Body Specification Revision 5.0 December 4, 1998.	
			VXIplug&play Systems Alliance VPP-3.3: Instrument Driver Interactive Developer Interface Specification Revision 3.0 December 4, 1998.	

## Combat Support Automatic Test System Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			VXIplug&play Systems Alliance VPP-3.4: Instrument Driver Programmatic Developer Interface Specification Revision 2.2 December 4, 1998.	
			IVI-4 Aug 98: IviScope Class.	
			IVI-5 Aug 98: IviDmm - Digital Multimeter Class.	
			IVI-6 Aug 98: IviFGen - Function Generator/ Arbitrary Waveform Generator Class.	
			IVI-7 Aug 98: IviPower - Power Supply Class.	
			IVI-8 Aug 98: IviSwitch - Switch Matrix/Multiplexor Class.	
CS.ATS.2.2.3.1.2 Diagnostic-Processing Standards			IEEE 1232-1998, Artificial Intelligence Exchange and Service Tie to All Test Environments (AI-ESTATE) Overview and Architecture	
			IEEE 1232.1-1997, Trial Use Standard for AI-ESTATE Data and Knowledge Specification.	
			IEEE 1232.2-1998, Trial Use Standard for AI-ESTATE Service Specification.	
CS.ATS.2.2.3.3 Adapter Function and Parametric Data Standards			IEEE P1226.11-1998, ABBET Test Resource Information Model.	

## Combat Support Automatic Test System Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
CS.ATS.2.2.3.4 ATS Instrument Function and Parametric Data Standards			IEEE P1226.11-1998, ABBET Test Resource Information Model.	
CS.ATS.2.2.3.5 ATS Switching Function and Parametric Data Standards			IEEE P1226.11-1998, ABBET Test Resource Information Model.	
CS.ATS.2.2.3.6 UUT Test Requirements Data Standards			IEEE Computer Society Test Technology Technical Committee Test Requirements Model (TeRM).	
CS.ATS.2.3.2.2 Instrument Communication Manager Standards	VXI plug&play (VPP) Systems Alliance Virtual Instrument Standard Architecture (VISA) Library, VPP-4.3, 22 January 1997.			
CS.ATS.2.3.3.1 Maintenance Test Data and Services (MTD)			IEEE P1522 IEEE Testability Standard.	
			IEEE 1545-1999 Trial Use Standard for Parametric Data Logging and Format.	
CS.ATS.2.3.3.2 Product Design Data (PDD)			ANSI/EIA 682:1996, EDIF Electronic Design Interchange Format, Version 399, Reference Manual and Information Model.	
CS.ATS.2.3.3.3 Built In Test Data (BTD)			IEEE 1149.1-1990 IEEE Standard Test Access Port and Boundary-Scan Architecture.	
			IEEE P1149.4-1999 Mixed-Signal Test Bus.	

## Combat Support Automatic Test System Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IEEE 1149.5-1995 IEEE Standard for Module Test and Maintenance Bus (MTM-Bus) Protocol.	
			IEEE P1226.13-1998 ABBET Parametric Data Log Format.	
CS.ATS.2.3.3.4 Resource Management Services (RMSs)			IEEE 1226.3-1998 Software Interfaces for Resource Management Services.	
CS.ATS.3.2.3.1 Runtime Servies			IEEE P1226.10, ABBET Run Time Services	
CS.ATS.3.3.2.2 System Framework Standards	VXI plug&play System Alliance System Frameworks Specification, VPP-2, Revision 4.0, 29 January 1996.			
CS.ATS.3.3.3.1 Receiver/Fixture Interface			IEEE P1505 Receiver Fixture Interface (RFI) Standard.	
CS.ATS.3.3.3.2 Switching Matrix Interface			IEEE P1552-1999 Standard Architecture for Test Systems (SATS).	

## Combat Support Defense Transportation System Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
CS.DTS.2.2.2.1 Product Data Interchange	PDF-417 as profiled by ANSI MH10.8.3M-1996, Material Handling – Unit Loads and Transport Packages – Two-Dimensional Symbols.			
CS.DTS.2.6.3.1 Internetworking Security Standards			Draft-IETF-Secsh-transport-06.txt, "SSH Transport Layer Protocol," T. Ylonen, 1999.	
			Draft-IETF-Secsh-userauth-06.txt, "SSH Authentication Protocol," T. Ylonen, 1999.	
			Draft-IETF-Secsh-connect-06.txt, "Connect," T. Ylonen, 1999.	
			Draft-IETF-Secsh-architecture-04.txt, "SSH Protocol Architecture," T. Ylonen, 1999.	
			Draft-IETF-Secsh-auth-kbdinteract-00.txt, "Generic Message Exchange Authentication For SSH," F. Cusack, 1999.	

Page intentionally left blank.



### Combat Support Medical Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
CS.MED.2.2.2.1 Medical Electronic Data Interchange	Health Level Seven (HL7), Version 2.3, Application Protocol for Electronic Exchange in Healthcare Environments, 1995.			This standard appeared in JTA V2.0 mandated under CS.2.2.4 Electronic Data Interchange
CS.MED.2.2.2.2 Retail Pharmacy Claims Electronic Data Interchange	NCPDP Telecommunication Standard, Version 3.2, 1995.			
CS.MED.2.2.2.3 Medical Still-Imagery Data Interchange	Digital Imaging and Communications in Medicine (DICOM), Version 3.0, 1993.			
CS.MED.2.2.2.4 Medical Information-Exchange Standards	ISBT 128, Bar Code Symbology and Application Specification for Labeling of Whole Blood and Blood Components, 1995 (for bar-coding blood donor number label information on blood bags).			
	Universal Product Number (UPN) System, 1996 (for identifying medical and surgical products in the supply chain).			
CS.MED.2.2.3.1 Commercial Electronic Data Interchange			X12N 270, Version 004010X092, Health Care Eligibility/Benefit Inquiry.	
			X12N 271, Version 004010X092, Health Care Eligibility/Benefit Information Response.	
			X12N 276, Version 004010X093, Health Care Claim Status Request.	
			X12N 277, Version 004010X093, Health Care Claim Status Response.	

### Combat Support Medical Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			X12N 278, Version 004010X094, Health Care Services Request for Review and Response.	
			X12N 820, Version 004010X061, Payroll Deducted and Other Group Premium Payment for Insurance Products.	
			X12N 834, Version 004010X095, Health Care Benefits and Enrollment and Maintenance.	
			X12N 835, Version 004010X091, Health Care Claim Payment/Advice.	
			X12N 837, Version 004010X096, Health Care Claim: Institutional.	
			X12N 837, Version 004010X097, Health Care Claim: Dental.	
			X12N 837, Version 004010X098, Health Care Claim: Professional.	
CS.MED.2.3.3.1 Medical Device Communications			IEEE 1073, Medical Device Communications Overview and Framework, 1996.	
			IEEE 1073.1, Medical Device Data Language (MDDL), for OSI Layer 7, 1993.	

### Combat Support Medical Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			IEEE 1073.2, Medical Device Communications Application Profile for OSI Layers 5 through 7, 1995.	
			IEEE 1073.3, Medical Device Communications Transport Profile, for OSI Layers 2 through 4, 1995.	
			IEEE 1073.4, Medical Device Communications Physical Layer, for OSI Layer 1, 1995.	
CS.MED.2.4.2.1 Medical Information Exchange Standards			ASTM E1238-97, Standard Specification for Transferring Clinical Observations between Independent Computer Systems, 1997.	
			ASTM E1239-94, Standard Guide for Description of Reservation/Registration-Admission, Discharge, Transfer (R-ADT) Systems for Automated Patient Care Information Systems, 1994.	
			ASTM E1284-97, Standard Guide for Construction of a Clinical Nomenclature for Support of Electronic Health Records, 1997.	

### Combat Support Medical Subdomain Annex Standards

JTA Section & Service Areas	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			ASTM E1384-96, Standard Guide for Content and Structure of the Computer-Based Patient Record, 1996.	
			ASTM E1460-92, Standard Specification for Defining and Sharing Modular Health Knowledge Bases, 1992.	
			ASTM E1712-97, Standard Specification for Representing Clinical Laboratory Test and Analyte Names, 1997.	
			ASTM E1713-95, Standard Specification for Transferring Digital Waveform Data between Independent Computer Systems, 1995.	
			ASTM E1714-95, Standard Guide for Properties of a Universal Healthcare Identifier, 1995.	
			ASTM E1715-95, Standard Practice for An Object-Oriented Model for Registration, Admitting, Discharge, and Transfer (R-ADT) Functions in Computer-Based Patient Record Systems, 1995.	

### Modeling and Simulation Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
M&S.2.2.2.1 HLA Rules	IEEE P 1516, Modeling and Simulation (M&S) High Level Architecture (HLA) – Framework and Rules, Version 1.3, 23 April 1999.	High Level Architecture Rules, Version 1.3, February 1998		
M&S.2.2.2.2 HLA Interface Specification	OMG Facility for Distributed Simulation Systems, Version 1.0, dated 10 November 1998			
	IEEE P 1516.1, Modeling and Simulation (M&S) High Level Architecture (HLA) Federate Interface Specification, Version 2, 23 April 1999	High Level Architecture Interface Specification, Version 1.3, February 1998		
M&S.2.2.2.3 HLA Object Model Template	IEEE P Standard 1516.2, Modeling and Simulation (M&S) High Level Architecture (HLA) Object Model Template (OMT) Specification, Version 1.3, 23 April 1999	High Level Architecture Object Model Template, Version 1.3, February 1998		
M&S.2.4.2.1 Federation Execution Details Data Interchange Format	Federation Execution Details Data Interchange Format, Version 1.3, February 1998	same		
M&S.2.4.2.2 Object Model Template Data Interchange Format	Object Model Template Data Interchange Format (OMT DIF), Version 1.3, February 1998	same		
M&S.2.4.2.3 Standard Simulator Database Interchange Format	MIL-STD-1821, Standard Simulator Data Base (SSDB) Interchange Format (SIF) Design Standard, 17 June 1993, with Change Notice 1, 17 April 1994, and Change Notice 2, 17 February 1996	same		

Page intentionally left blank.

### Weapon Systems Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.2.2.3.1 Operating-System Services			IEEE P1003.5c/D3 POSIX - Part 1: Binding for API – Amendment 2: Protocol Independent Interfaces, October 1997	
			IEEE P1003.5f POSIX: Ada binding to 1003.21, January 1997	
WS.2.4.3 Emerging Standards			IEEE 1076, Standard VHSIC Hardware Description Language (VHDL) Reference Manual, 1993	
			IEEE 1076.2 VHDL Mathematical Package, 1996	
			IEEE 1076.3 Standards VHDL Synthesis Package, 1997	
WS.2.5.3 Emerging Standards			U.S. Army Weapon Systems Human-Computer Interface (WSHCI) Style Guide, Version 2.0, 31 December 1997	
WS.3.5.3 Emerging Standards			IEEE P1386.1/D2.0, Physical/Environmental Layers for Peripheral Component Interface (PCI) Mezzanine Cards, PMC, April 1995	
			ATSC Document A/53, ATSC Digital Television Standard, 16 September 1995	

### Weapon Systems Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.3.6.1.3 Emerging Standards			Aeronautical Telecommunications: Annex 10 to the Convention on International Civil Aviation, Volume IV (Surveillance Radar and Collision Avoidance Systems), Edition 1, International Civil Aviation Organization (ICAO): Montreal, 1995, with Supplements (31 May 1996 and 10 November 1997).	
			DOT FAA 1010.51A, 8 March 1971: US National Aviation Standard for the Mark X (SIF) Air Traffic Control Radar Beacon system (ATCRBS) Characteristics.	
			DoD AIMS 97-1000, 18 March 1998, Performance/Design and Qualification Requirements Technical Standard For The ATCRBS/IFF/MARK XII Electronic Identification System and Military Mode S.	
			DoD AIMS 97-900, 18 March 1998, Performance/Design And Qualification Requirements Mode 4 Input/Output Data.	



### Weapon Systems Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			STANAG 4193, Part 1, Edition 2, 12 November 1990, with Amendment 1, 15 December 1997: NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders.	
			STANAG 4193, Part 2, Edition 1, 12 November 1990 (SECRET): NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders.	
			STANAG 4193, Part 3, Edition 1, 12 November 1990, with Amendment 1, 31 January 1995: NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders.	
			STANAG 4193, Part 4, 28 November 1997: NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders.	

### Weapon Systems Domain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			STANAG 4193, Part 5, Annex A through D, 4 September 1998 (SECRET NATO RESTRICTED): NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders.	

### Weapon Systems Aviation Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.AV.2.5.3 Emerging Standards			MIL-STD-1787B, Aircraft Display Symbology, 5 April 1996.	
WS.AV.3.2.2 Emerging Standards			RTCA DO-224 – Change 1, Signal-in-Space Minimum Aviation Systems Performance Standards (MASPS) Advanced VHF Digital Data, Communications Including Capability with Digital Voice Technique, 30 April 1998.	
			International Civil Aviation Organization (ICAO) Annex 10, Volume III concerning SARPs for High Frequency Data Link (HFDL), July 1995.	
			RTCA DO-210C, Minimum Operational Performance Standards For Aeronautical Mobile Satellite Services (AMSS), 16 January 1996.	
			RTCA DO-219, Minimum Operational Performance Standards for ATC Two-Way Data Link Communications, 27 August 1993.	
			RTCA DO-212, Minimum Operational Performance Standards for Airborne Automatic Dependent Surveillance (ADS) Equipment, 26 October 1992.	

### Weapon Systems Aviation Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
			RTCA DO-181A, Minimum Operational Performance Standards for Air Traffic Control Radar Beacon System/Mode Select (ATCRBS/Mode S), Airborne Equipment, 14 January 1992, Change 1 errata 14 January 1993.	

## Weapon Systems Ground Vehicle Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.GV.2.2.3 Emerging Standards			Weapon Systems Technical Architecture Working Group (WSTAWG) Operating Environment (OE) Application Programmer's Interface (API), Volume I, OE Application Interface, Version 1.0, 12 June 1998.	
WS.GV.3.5.2 Mandated Standards	MIL-STD-1553B, Standard for Medium Speed System Network Bus, 21 September 1978, with Notice of Change 1, 12 February 1980, Notice of Change 2, 8 September 1986, Notice of Change 3, 31 January 1993, and Notice of Change 4, 15 January 1996	same		
	ANSI/VITA 1, VME64 Specification, 1994	same		
	SAE J 1850, Class B Data Communication Network Interface, 1 July 1995	same		
	ANSI X3.131, Information Systems - Small Computer Systems Interface - 2 (SCSI-2), 1994.	same		
	Personal Computer Memory Card International Association (PCMCIA), PC Card Standard, March 1997	same		
	IEEE 1101.2, Standard for Mechanical Core Specifications for Conduction-Cooled Eurocards (ANSI), 1992	same		
	EIA 170, Electrical Performance Standards - Monochrome Television Studio Facilities, November 1957	same		
	EIA 330, Electrical Performance Standards for Closed Circuit Television Camera 525/60 Interlaced 2:1 (ANSI/ EIA 330-68), November 1966	same		
	EIA 343-A, Electrical Performance Standard for High Resolution Monochrome Closed Circuit Television Camera (November 1966), September 1969	same		
	PCI Industrial Computer Manufacturer's Group (PICMG): Compact PCI Specification, R2.1, September 1997.			
	SMPTE 170M, Television - Composite Analog Video Signal - NTSC for Studio Applications, 1994	same		

Page intentionally left blank.

### Weapon Systems Missile Defense Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.MD.2.2.3.1 Navigation Standard			BMD-P-SD-92-000002-A, Ballistic Missile Defense (BMD) Navigation Standard, Ballistic Missile Defense Organization, 23 June 1993	Maps to 2.2.2.2.1.4.3 in the core.
WS.MD.2.4.2.1 Bit-Oriented Formatted Messages	MIL-STD-6016A, Tactical Digital Information Link (TADIL) J Message Standard, 30 April 1999.			
WS.MD.2.5.2.1 Symbology	MIL-STD-2525B, Common Warfighting Symbology, 30 January 1999.			

Page intentionally left blank.



### Weapon Systems Missile Systems Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.MS.3.5.3 Physical Resources Layer			MIL-STD-1553B, Interface Standard for Digital Time Division Command/Response Multiplex Data Bus, 21 September 1978, with Notice of Change 1, 12 February 1980, Notice of Change 2, 8 September 1986, Notice of Change 3, 31 January 1993, and Notice of Change 4, 15 January 1996.	
			PCI Industrial Computer Manufacturer's Group (PICMG): Compact PCI Specification, R2.1, September 1997.	
			ANSI X3.131, Information Systems - Small Computer Systems Interface - 2 (SCSI-2), 1994.	
			Personal Computer Memory Card International Association (PCMCIA), PC Card Standard, March 1997.	
			IEEE 1101.2, Standard for Mechanical Core Specifications for Conduction-Cooled Eurocards (ANSI), 1992.	
			SAE J 1850, Class B Data Communication Network Interface, 1 July 1995.	
			ANSI/VITA 1, VME64 Specification, 1994.	

Page intentionally left blank.

### Weapon Systems Munition Systems Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.MUS.3.5.2 Physical Resources Layer Interfaces	ANSI X3.131, Information Systems – Small Computer Systems Interface – 2 (SCSI-2), 1994			
	PCI Industrial Computer Manufacturer's Group (PICMG): Compact PCI Specification, R2.1, September 1997			
	Personal Computer Memory Card International Association (PCMCIA), PC Card Standard, March 1997			

Page intentionally left blank.







### Weapon Systems Soldier Systems Subdomain Annex Standards

JTA Section & Service Area	Currently Mandated Standard, Title, & Date	Previously Mandated Standard	Emerging Standard	Comments
WS.SS.3.5.2 Physical Resources Layer Interface	EIA 170, Electrical Performance Standards – Monochrome Television Studio Facilities, November 1957.			
	SMPTE 170M, Television – Composite Analog Video Signal – NTSC for Studio Applications, 1994.			











This page intentionally left blank.

## Appendix C: Document Sources

### Commercial Documents








Organization	Source Location	URL
ANSI	American National Standards Institute, Attention Customer Service, 11 West 42nd St., New York, NY 10036 USA Tel: +1 212 642 4900.	<a href="http://www.ansi.org">http://www.ansi.org</a> 
CCITT	International Telegraph and Telephone Consultative Committee (CCITT) is now known as International Telecommunications Union - Telecommunications Standardization Sector (ITU-T). See the ITU-T entry for source location information.	<a href="http://www.itu.int">http://www.itu.int</a> 
CORBA	Information about the Common Object Request Broker Architecture (CORBA) can be obtained from the Object Management Group (OMG). See the OMG entry for source location information.	<a href="http://www.omg.org">http://www.omg.org</a> 
EIA	Electronics Industries Association Global Engineering Documents 7730 Carondelet Ave., Suite 407 Clayton, MO 63105 USA Tel: +1 800 854 7179	<a href="http://global.ihs.com">http://global.ihs.com</a> 
AB	Internet Architecture Board (IAB) documents are available from Internet Engineering Task Force (IETF). See the IETF entry for source location information.	
IEEE	Secretary, IEEE Standards Board Institute of Electrical and Electronics Engineers, Inc P.O. Box 1331, 445 Hoes Lane Piscataway, NJ 08855-1331, USA Tel: +1 800 678 4333	<a href="http://standards.ieee.org">http://standards.ieee.org</a> 
IETF	Internet Engineering Task Force SRI International, Room EJ291 Network Information Systems Center 333 Ravenswood Avenue Menlo Park, CA 94025, USA  Email: <a href="mailto:mailserv@ds.internic.net">mailserv@ds.internic.net</a>  (Include the phrase "Send rfcxxxx.txt" in the body of the message to obtain a copy of the corresponding RFC standard via email.)	<a href="http://www.ietf.org">http://www.ietf.org</a> 

## Commercial Documents









ISO	International Organization for Standardization (ISO) Standards can be obtained from: American National Standards Institute (ANSI) Attention Customer Service 11 West 42nd St., New York, NY 10036 USA Tel: +1 212 642 4900	<a href="http://www.ansi.org">http://www.ansi.org</a> 
ITU-T	International Telecommunications Union - Telecommunications Standardization Sector (ITU-T) standards may be obtained from: National Technical Information Service 5285 Port Royal Road Springfield, VA 22161 USA Tel: +1 800 553 6847	<a href="http://www.itu.int/publication/catalog">http://www.itu.int/publication/catalog</a> 
OMG	Information about the Object Management Group (OMG) is available from the OMG Web site.	<a href="http://www.omg.org">http://www.omg.org</a> 
OSF	Open Systems Foundation (OSF), X/Open, and Open Group documents may be obtained from: Open Group, Apex Plaza Foxbury Road Reading, RG1 1AX England Tel: +44 118 9 508311 Fax: +44 118 9 500110	<a href="http://www.opengroup.org/publications/catalog/">http://www.opengroup.org/publications/catalog/</a> 
RFC	See IETF	N/A
SAE	Society of Automotive Engineers	<a href="http://www.sae.org">http://www.sae.org</a> 
SR	Bellcore Special Report Tel: +1 800 521 2673	<a href="http://www.bellcore.com">http://www.bellcore.com</a> 
TIA	Telecommunications Industry Association (TIA) Standards can be obtained from: Global Engineering Documents 7730 Carondelet Ave., Suite 407 Clayton, MO 63105 USA Tel: +1800 854 7179	<a href="http://global.ihs.com">http://global.ihs.com</a> 
UML	Information about Unified Modeling Language (UML) can be obtained at the Rational Corporation Web site.	<a href="http://www.rational.com">http://www.rational.com</a> 
VXIplug&play	System Alliance 6504 Bridge Point Parkway Austin, TX 78730 USA	<a href="http://www.tek.com">http://www.tek.com</a> 
WMO	World Meteorological Organization (WMO) documents may be obtained from: American Meteorological Society Attention: WMO Publications Center 45 Beacon Street, Boston, MA 02108 USA	<a href="http://www.wmo.org">http://www.wmo.org</a> 
X/Open	See OSF	







## Government Documents




Organization	Source Location	URL
C2CDM	Command and Control Core Data Model (C2CDM) Information may be obtained from the referenced URL.	<a href="http://www-datadmn.itsi.disa.mil">http://www-datadmn.itsi.disa.mil</a> 
DDM	DoD Defense Data Model (DDM) Information may be obtained from the referenced URL.	<a href="http://www-datadmn.itsi.disa.mil">http://www-datadmn.itsi.disa.mil</a> 
DCA	Defense Communications Agency is now called Defense Information Systems Agency (DISA). See the DISA entry for source location information.	N/A
DDDS	Access to the Defense Data Dictionary System (DDDS) can be obtained on-line or through a PC Access Tool (PCAT). Developers should use both versions for full DDDS coverage. Information about the DDDS is available from: DISA JIEO, Center for Standards 701 South. Courthouse Road Arlington, VA 22204 USA. Tel: +1 703 735 3027	<a href="http://www.datadmin.itsi.disa.mil">http://www.datadmin.itsi.disa.mil</a>   Take path: DoD Government DocumentsData Administration (DATADMN)
DISA	DCA Circulars (DCAC) and DISA Circulars (DISAC) may be obtained from the Defense Information Systems Agency (DISA) Publications Office by written request on company letterhead and citing contract number. Defense Information Systems Agency Publications Office 701 South Courthouse Road Arlington VA 22204 USA Tel: +1 703 607 6548 Fax: +1 703 607 4661.	<a href="http://www.itsi.disa.mil">http://www.itsi.disa.mil</a> 
DoD-HDBK	See MIL STD	<a href="http://assist.daps.mil/online/">http://assist.daps.mil/online/</a> 
DoD-STD	See MIL STD	<a href="http://assist.daps.mil/online/">http://assist.daps.mil/online/</a> 
EDISMC	The DoD EDI Standards Management Committee (EDISMC) coordinates EDI standardization activities with DoD. DoD-approved implementation conventions may be viewed on the World Wide Web at the referenced URL.	<a href="http://www-edi.itsi.disa.mil">http://www-edi.itsi.disa.mil</a> 

## Government Documents

FESMCC	The Federal Electronic Data Interchange (EDI) Standards Management Coordinating Committee (FESMCC) harmonizes the development of EDI transaction sets and message standards among Federal agencies. The final Architecture document (Streamlining Procurement Through Electronic Commerce) from the Federal Electronic Commerce Acquisition Program Management Office (ECAPMO) is now available.	<a href="http://ec.fed.gov/edi.htm">http://ec.fed.gov/edi.htm</a> 
FIPS	Federal Information Processing Standards (FIPS) are available to DoD Organizations (See MIL STD); others must request copies of FIPS from: National Technical Information Service (NTIS) 5285 Port Royal Road Springfield, VA 22161-2171 USA. Tel: +1 800 553 6847	<a href="http://www.ntis.gov/search.htm">http://www.ntis.gov/search.htm</a> 
ITSG	The Information Technology Standards Guidance (ITSG) may be obtained from the DISA Center for Standards (CFS) web page.	<a href="http://www.itsi.disa.mil">http://www.itsi.disa.mil</a>  Take path: Info Tech Stnds Guidance (ITSG) Ver 3.1
JTA	Information about the Joint Technical Architecture document can be obtained from the JTA web site.	<a href="http://www-jta.itsi.disa.mil">http://www-jta.itsi.disa.mil</a> 
MIL-HDBK	See MIL STD	<a href="http://assist.daps.mil/online/">http://assist.daps.mil/online/</a> 
MIL-STD	Copies of military standards (MIL STD, DoD STD), and handbooks (MIL HDBK, DOD HDBK) are available from: DoD Single Stock Point (DoDSSP) - Customer Service Standardization Document Order Desk 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094 USA. Tel: +1 215 697 2667/2179 (M-F, 7:30 AM-4:00 PM)	<a href="http://assist.daps.mil/online/">http://assist.daps.mil/online/</a> 
MISSI	Multilevel Information Systems Security Initiative (MISSI) product information (FORTEZZA, etc.) may be obtained by calling the MISSI Help Desk at: Tel: +1 800 466 4774 (1-800-GO-MISSY)	<a href="http://www.nsa.gov:8080/programs/missi">http://www.nsa.gov:8080/programs/missi</a> 
NAWCADLKE	Copies of Naval Air Warfare Center Aircraft Division, NAWCADLKE-MISC-05-PD-003, Navy Standard Digital "Simulation Data Format (SDF)" can be obtained from:  Naval Air Warfare Center ATE Software Center, Code 4.8.3.2, Bldg. 551-1, Lakehurst, NJ 08733 USA.	<a href="http://www.nawcad.navy.mil/nawcad">http://www.nawcad.navy.mil/nawcad</a> 

## Government Documents

NCSC	The Rainbow Series of documents from the National Security Center (NCSC) may be obtained from: NSA-V21 9800 Savage Rd. Fort Meade, MD 20755 USA. Tel: +1 410 859 6091	<a href="http://www.radium.ncsc.mil/tpep/library/rainbow/index.html">http:// www.radium.ncsc.mil/tpep/ library/rainbow/ index.html</a> 
NIST	National Institute of Standards and Technology (NIST) documents may be obtained from:  National Technical Information Service (NTIS) 5285 Port Royal Road Springfield, VA 22161-2171 USA Tel: +1 800 553-6847	<a href="http://www.ntis.gov/search.htm">http://www.ntis.gov/ search.htm</a> 
STANAG	STANAGs and other NATO standardization agreements may be obtained by DoD, Federal agencies, and their contractors from: Central U.S. Registry 3072 Army Pentagon Washington, D.C. 20301-3072 USA. Tel: +1 703 697 5943/6432 Fax: +1 703 693 0585 Contractor requests for documents should be forwarded through their COR (contracting officer representative) or other Government sponsor to establish need-to-know.	N/A
TAFIM	Technical Architecture Framework for Information Management (TAFIM) information may be obtained from the TAFIM Support Line at the referenced URL.	<a href="http://www.itsi.disa.mil">http://www.itsi.disa.mil</a> 
TIDP	Technical Interface Design Plans (TIDPs) may be obtained via the service POCs to the Joint Multi-TADIL CCB from: DISA/JIEO Center for Standards (CFS) TADIL Division, code JEBCA Tel: +1 703 735 3524 Email: shermans@ncr.disa.mil	N/A
USIGS	The United States Imagery and Geospatial Information Service (USIGS) is an umbrella term for the suites of systems formerly called the United States Imagery System (USIS) and the Global Geospatial Information and Services (GGIS). Information related to standards can be found on: the NIMA Standards and Interoperability web page, or contact NIMA: Tel: 703-755-5663 E-Mail: wesdockj@nima.mil	<a href="http://www.nima.mil/sandi">http://www.nima.mil/ sandi</a> 
USIS	See USIGS	

FTR 1080A-1998	Federal Defense Information Systems Agency (DISA) Joint Interoperability and Engineering Organization (JIEO) code JEBBC Fort Monmouth, NJ 07703 USA	<a href="http://multi.nosc.mil/profile.htm"><u>http://multi.nosc.mil/ profile.htm</u></a> 
Y2K	<p>DoD policy guidance on Year 2000 (Y2K) compliance can be found in the "DoD Year 2000 Management Plan." The plan is available at the referenced URL.</p> <p>For procurement and acquisition purposes, the General Services Administration (GSA) has made the following documents available on its Web site: "recommended Year 2000 Contract Language (11 September 1996)" and "Federal Acquisition Regulation Interim Rule on the Year 2000 (2 January 1997)."</p>	<p><a href="http://www.dtic.mil/c3i/y2k"><u>http://www.dtic.mil/c3i/ y2k</u></a> </p> <p><a href="http://www.itpolicy.gsa.gov"><u>http:// www.itpolicy.gsa.gov</u></a> </p>


## Appendix D: References

- Chairman of the Joint Chiefs of Staff Instruction (CJCSI) 6212.01A: Compatibility, Interoperability, and Integration of Command, Control, Communications, Computers, and Intelligence Systems, 30 June 1995.
- Joint Chiefs of Staff. Joint Vision 2010. Chairman of the Joint Chiefs of Staff, 5126 Joint Staff, Pentagon, Washington, D.C., 20318-5126, June 1997.
- Defense Management Report Decision (DMRD) 918: Defense Information Infrastructure, September 15, 1992.
- Defense Standardization Program (DSP) 4120.3-M: Policies and Procedures. Office of the Assistant Secretary of Defense, Production and Logistics, July 1993.
- Department of Defense Directive 4630.5: Compatibility, Interoperability, and Integration of Command, Control, Communications, and Intelligence (C3I) Systems. November 12, 1992.
- Department of Defense Regulation (DoDR) 5000.2-R: Mandatory Procedures for Major Defense Acquisition Programs (MDAPs) and Major Automated Information System (MAIS) Acquisition Programs, March 15, 1996.
- Department of Defense Directive (DoDD) 5000.59: DoD Modeling and Simulation (M&S) Management, January 4, 1994.
- Department of Defense 5000.59-P: DoD Modeling and Simulation (M&S) Master Plan (MSMP), October 1995.
- Department of Defense Directive (DoDD) 8320.1: Data Administration, September 26, 1991.
- IEEE 610.12A-1990: IEEE Standard Glossary of Software Engineering Terminology.
- IEEE P1029.3:19xx, Test Requirements Specification Language (TRSL).
- IEEE 1226.11:19xx, ABBET Test Resource Information Model (TRIM).
- IEEE 1232, Artificial Intelligence Exchange and Services Tie to All Test Environments (AI-ESTATE).
- IEEE 1232.1:1997, Artificial Intelligence Exchange and Services Tie to All Test Environments (AI-ESTATE): Data and Knowledge Specification.
- IEEE 1232.2, Artificial Intelligence Exchange and Services Tie to All Test Environments (AI-ESTATE)
- Electronic Industry Association: Electronic Design Interchange Format (EDIF), 19xx.
- Information Technology Management Reform Act (ITMRA) (also known as Clinger-Cohen Act of 1996 (Public Law 104-106).
- Memorandum: Executive Agent for DoD Information Standards, 24 March 1993.
- Memorandum: Paul A. Strassman: Open Systems Implementation, May 23, 1991.
- Memorandum: Secretary of Defense: Specifications and Standards – A new Way of Doing Business, June 1994.

- Office of Management and Budget Circular No. A-119: Federal Participation in the Development and Use of Voluntary Standards, October 20, 1993.
- Public Law 104-106: Clinger-Cohen Act of 1996, February 10, 1996 (formerly the Information Technology management Reform Act of 1996).
- Public Law 104-113: National Technology Transfer and Advancement Act of 1995. 104<sup>th</sup> Congress, March 7, 1996.

## **Appendix E: JTA Relationship to DoD Standards Reform**

### **DOD (Specifications And) Standards Reform - Background**

The DoD Standards Reform was begun in June 1994 when the Secretary of Defense issued his memorandum entitled "Specifications and Standards - A New Way of Doing Business." the Secretary of Defense directed that performance-based specifications and standards or nationally-recognized private sector standards be used in future acquisitions. The intent of this initiative is to eliminate non-value added requirements, and thus to reduce the cost of weapon systems and materiel; remove impediments to getting commercial state-of-the-art technology into our weapon systems; and integrate the commercial and military industrial bases to the greatest extent possible. The Defense Standards Improvement Council (DSIC) directs implementation of the Reform. The DSIC has interpreted and extended the Reform policy through a series of numbered OSD policy memos. These policy memos and other DSIC decisions, newsletters and other standardization related information are posted on the Defense Standardization Program (DSP) World Wide Web home page at: <http://www.dsp.dla.mil/> .

### **The JTA and the DoD Standards Reform**

The standards and specifications and other standardization documents identified in the Joint Technical Architecture (JTA) can be cited in solicitations without conflicting with the DoD Standards Reform. All JTA standards have been granted Department-wide exemption from the waiver requirement by the Defense Standards Improvement Council. Mandatory application of JTA standards to acquisition solicitations is authorized. Contrary to interpretations that have been made in the recent past by some DoD organizations, the DoD Standards Reform is not eliminating military standards and specifications nor precluding their use. What the Reform is trying to eliminate is the automatic development and imposition of military-unique standards and specifications as the cultural norm. The JTA calls out non-Government standards in every case where it makes sense and where it will lead to the use of commercial products and practices that meet the DoD's needs. The JTA only calls out Military and Federal standards and specifications in those instances where no non-Government standard exists that is cost effective and meets the requirement or where the use of the non-Government standard must be clarified to enable interoperability of DoD systems.

### **Reform Waiver Policy**

Policy Memo 95-1 establishes procedures for waivers for use of specifications and standards cited as requirements in solicitations. These waiver procedures apply to the types of standards that fall under the province of the Defense Standardization Program and are indexed in the DoD Index of Standards and Specifications (DoDISS). Specifically of relevance to the JTA, Policy Memo 95-1 states that non-Government standards, Interface Standards, Federal Information Processing Standards (FIPS), and Performance Specifications do not require waivers. Also, Policy Memo 95-9 provides that international standardization agreements such as NATO STANAGs (and ACPs) do not require waivers. Federal Telecommunications Standards (FED-STD) do not require a waiver when they qualify as interface standards. All of the above waiver-free document types encompass most of the standards cited in the JTA. The DSP Home Page provides lists of waiver-free standards and in the near future the DoDISS will indicate those standards that can be used without a waiver.

**Non-DoDISS Standards Not Subject to the Reform Waiver Policy**

There are a small number of JTA standards that are not among the types of Government standards that are indexed in the DoDISS and are therefore not subject to the Reform waiver policy. Therefore, they also do not require a waiver to be cited in a solicitation. (An example of a JTA document of a type that is not indexed in the DoDISS is DoD 5200.28-STD.) However, the citation of these non-DoDISS standards in solicitations must comply with Service/Agency requirements for preparation and approval of performance-based program unique specifications. A system specification used to procure a C4I system or a weapon system is a program unique specification. Procedures for preparing performance specifications are provided in MIL-STD-961D, Defense Specifications, Change 1, 22 August 1995 and in the DSP Performance Specification Guide, SD-15, dated 29 June 1995. MIL-STD-961D defines a performance specification as follows: "A specification that states requirements in terms of the required results with criteria for verifying compliance, but without stating the methods for achieving the required results. A performance specification defines the functional requirements for the item, the environment in which it must operate, and interface and interchangeability characteristics." By this definition, standards that define "interface" characteristics can be properly cited in a performance specification. Therefore, JTA non-DoDISS standards that are used to define interface characteristics are not in conflict with service/agency requirements for preparation and approval of performance-based program unique specifications.

**Interface Standards Are Waiver-Free**

Most JTA standards qualify as Interface Standards. Policy Memo 95-6 defines the five types of DoD-prepared standards as: interface standards, standard practices, test method standards, manufacturing process standards, and design criteria standards. Policy Memo 95-1 states that of these types, interface standards and standard practices do not require a waiver when cited in a solicitation. MIL-STD-962C (a standard practice) provides definitions, format, and content direction for military standards. It defines an interface standard as follows: "A standard that specifies the physical, functional, or military operational environment interface characteristics of systems, subsystems, equipment, assemblies, components, items or parts to permit interchangeability, interconnection, interoperability, compatibility, or communications." The use of military and Federal interface standards in solicitations is fully compliant with the DoD Standards Reform.

**Non-Government Standards Vs. Military/Federal Standardization Documents**

One of DoD's key acquisition reform goals is to reduce acquisition costs and remove impediments to commercial-military integration by emulating commercial buying practices wherever possible. Thus, for any processes, practices, or methods that are described by a non-Government standard used by Commercial firms and which meet DoD's needs, DoD activities should also be using a non-Government standard instead of applying, developing, or revising a military or Federal Standard. The standards selected for the JTA are predominantly non-Government standards. Military or Federal standards have been selected for the JTA only in those instances where non-Government standards failed to satisfy the DoD needs. In most of those instances, in fact, the military or Federal standard is a profile of one or more non-Government standards. The military or Federal profile identifies the chosen classes, subsets, options, and parameters of one or more base standards necessary for achieving interoperability (or other function). In some instances, the profile specifies



unique interface requirements not satisfied by the non-Government standard. Therefore the JTA complies fully with this key acquisition reform goal.

This page intentionally left blank.

## Appendix F: Glossary

Note: Where two textual variants of the same term, e.g., “real time” and “real-time” occur in the document, both are shown.

### **Access Control**

Process of limiting access to the resources of an IT product only to authorized users, programs, processes, systems, or other IT products.

### **Accreditation**

The managerial authorization and approval granted to an ADP system or network to process sensitive data in an operational environment, made on the basis of a certification by designated technical personnel of the extent to which design and implementation of the system meet pre-specified technical requirements, e.g., TCSEC, for achieving adequate data security. Management can accredit a system to operate at a higher/lower level than the risk level recommended (e.g., by the Requirements Guideline) for the certification level of the system. If management accredits the system to operate at a higher level than is appropriate for the certification level, management is accepting the additional risk incurred.

### **Activity Model (IDEF0)**

A graphic description of a system or subject that is developed for a specific purpose and from a selected viewpoint. A set of one or more IDEF0 diagrams that depict the functions of a system or subject area with graphics, text and glossary. (FIPS Pub 183, Integration Definition For Function Modeling (IDEF0), December 1993).

### **Aggregate-Level Simulation Protocol (ALSP)**

A family of simulation interface protocols and supporting infrastructure software that permit the integration of distinct simulations and war games. Combined, the interface protocols and software enable large-scale, distributed simulations and war games of different domains to interact at the combat object and event level. The most widely known example of an ALSP confederation is the Joint/Service Training Confederation (CBS, AWSIM, JECEWSI, RESA, MTWS, TACSIM, CSSTSS) that has provided the backbone to many large, distributed, simulation-supported exercises. Other examples of ALSP confederations include confederations of analytical models that have been formed to support U.S. Air Force, U.S. Army, and U.S. TRANSCOM studies. (DoD 5000.59-P, “Modeling and Simulation Master Plan,” October 1995, authorized by DoD Directive 5000.59, January 4, 1994).

### **American National Standards Institute (ANSI)**

The principal standards coordination body in the U.S. ANSI is a member of the ISO.

### **Application Platform**

- ☐ The collection of hardware and software components that provide the services used by support and mission-specific software applications. (DoD TRM, Version 1.1, 15 July 1999)

- ☐ The application platform is defined as the set of resources that support the services on which application software will execute. It provides services at its interfaces that, as much as possible, make the implementation-specific characteristics of the platform transparent to the application software. (DoD TRM, Version 1.1, 15 July 1999).

### **Application Platform *Entity***

The term ‘application platform *entity*’ is used when referencing the DoD TRM, as opposed to referencing an actual hardware platform (physical implementation).

### **Application Program Interface (API)**

- ☐ The interface, or set of functions, between the application software and the application platform. (NIST Special Publication 500-230; DoD TRM, Version 1.1, 15 July 1999)
- ☐ The means by which an application designer enters and retrieves information. (DoD TRM, Version 1.1, 15 July 1999).

### **Application Software Entity**

Mission-area and support applications. A common set of support applications forms the basis for the development of mission-area applications. Mission-area applications should be designed and developed to access this set of common support applications. Applications access the Application Platform via a standard set of APIs. (DoD TRM, Version 1.1, 15 July 1999).

### **Architecture**

Architecture has various meanings, depending upon its contextual usage. (1) The structure of components, their interrelationships, and the principles and guidelines governing their design and evolution over time. (2) Organizational structure of a system or component. (IEEE STD 610.12-1900; DoD TRM, Version 1.1, 15 July 1999) or;

An architecture is a composition of (1) components (including humans) with their functionality defined (Technical), (2) requirements that have been configured to achieve a prescribed purpose or mission (Operational), and (3) their connectivity with the information flow defined. (OS-JTF).

### **Authentication**

- ☐ To verify the identity of a user, device, or other entity in a computer system, often as a prerequisite to allowing access to resources in a system.
- ☐ To verify the integrity of data that have been stored, transmitted, or otherwise exposed to possible unauthorized modification.

### **CBR**

Circuit (voice and telephony) traffic over ATM.

### **Character-Based Interface**

A non-bit mapped user interface in which the primary form of interaction between the user and system is through text.

**Combatant Command**

A unified or specified command with a broad continuing mission under a single commander [Commander-in-Chief, CINC] established and so designated by the President, through the Secretary of Defense with the advice and assistance of the Chairman of the Joint Chiefs of Staff. Combatant commands typically have geographic [e.g., Middle East, Central Command] or functional [e.g., military equipment and personnel transport, Transportation Command] responsibilities. [Source – Joint Publication 1-02, 10 June 1998]

Unless otherwise directed by the President or Secretary of Defense, the authority, direction, and control of the Commander of a Unified or Specified Combatant Command with respect to all the commands and forces assigned to that command [including Headquarters, Service, and Agency Components] include the command functions of giving authoritative direction to subordinate commands and forces necessary to carry out missions assigned to the command . . . [Source: DoD Directive 5100.1, “Functions of the Department of Defense and Its Major Commands,” September 25, 1987].

**Command and Control**

The exercise of authority and direction by a properly designated commander over assigned and attached forces in the accomplishment of the mission. Command and control functions are performed through an arrangement of personnel, equipment, communications, facilities, and procedures employed by a commander in planning, directing, coordinating, and controlling forces and operations in the accomplishment of the mission. (JP1-02).

**Command, Control, Communications, and Computer Systems**

Integrated systems of doctrine, procedures, organizational structures, personnel, equipment, facilities, and communications designed to support a commander’s exercise of command and control across the range of military operations. (JP1-02).

**Commercial Item**

- ☐ Any item customarily used by the general public for other than governmental purposes, that has been sold, leased, or licensed to the general public, or that has been offered for sale, lease, or license to the general public.
- ☐ Any item that evolved from an item described in 1) above through advances in technology or performance that is not yet available in the commercial market, but will be available in time to meet the delivery requirements of the solicitation.
- ☐ Any item that, but for modifications of a type customarily available in the commercial market or minor modifications made to meet DoD requirements, would satisfy the criteria in 1) or 2) above.
- ☐ Any combination of items meeting the requirements of 1, 2, or 3 above or 5 below that are of a type customarily combined and sold in combination to the general public.
- ☐ Installation services, maintenance services, repair services, training services, and other services if such services are procured for support of any item referred to paragraphs 1, 2, 3, or 4 above, if the sources of such services:

- offers such services to the general public and DoD simultaneously and under similar terms and conditions and
  - offers to use the same work force for providing DoD with such services as the source used for providing such services to the general public.
- ☐ Services offered and sold competitively, in substantial quantities, in the commercial marketplace based on established catalog prices of specific tasks performed and under standard commercial terms and conditions.
  - ☐ Any item, combination of items, or service referred to in 1 through 6 above notwithstanding the fact that the item or service is transferred between or among separate divisions, subsidiaries, or affiliates of a contractor.
  - ☐ A nondevelopmental item developed exclusively at private expense and sold in substantial quantities, on a competitive basis, to State and local governments.

(DRAFT Nondevelopmental Item, 6/30/95, HANDBOOK/ Federal Acquisition Streamlining Act of 1994 DoD 5000.37H.)

### **Commercial off-the-Shelf (COTS)**

- ☐ See the definition of Commercial Item found above. (OS-JTF 1995).
- ☐ Refers to an item of hardware or software that has been produced by a contractor and is available for general purchase. Such items are at the unit level or higher. Such items must have been sold and delivered to government or commercial customers, must have passed customer's acceptance testing, be operating under customer's control, and within the user environment. Further, such items must have meaningful reliability, maintainability, and logistics historical data. (DoD TRM, Version 1.1, 15 July 1999)

### **Compliance**

Compliance is enumerated in an implementation/migration plan. A system is compliant with the JTA if it meets, or is implementing, an approved plan to meet all applicable JTA mandates.

### **Conceptual Model of the Mission Space (CMMS)**

One of the three components of the DoD Common Technical Framework (CTF). They are first abstractions of the real world and serve as a frame of reference for simulation development by capturing the basic information about important entities involved in any mission and their key actions and interactions. They are simulation-neutral views of those entities, actions, and interactions occurring in the real world. (DoD 5000.59-P, "Modeling and Simulation Master Plan," October 1995, authorized by DoD Directive 5000.59, January 4, 1994).

### **Confidentiality**

Encryption and decryption are implemented using a single shared key between the originator and the recipient.

**Configuration Management**

A discipline applying technical and administrative direction and surveillance to: (1) identify and document the functional and physical characteristics of a configuration item, (2) control changes to those characteristics, and (3) record and report changes to processing and implementation status. (DoD TRM, Version 1.1, 15 July 1999).

**Coordinated Universal Time (UTC)**

Time scale, based on the second (SI), as defined and recommended by the CCIR and maintained by the Bureau International des Poids et Mésures (BIPM).

**Data Dictionary**

A specialized type of database containing metadata that is managed by a data dictionary system; a repository of information describing the characteristics of data used to design, monitor, document, protect, and control data in information systems and databases; an application of a data dictionary system. (DoD 8320.1-M-1, "Data Element Standardization Procedures," January 15, 1993, authorized by DoD Directive 8320.1, September 26, 1991).

**Data Integrity**

- ☐ The state that exists when computerized data is the same as that in the source documents and has not been exposed to accidental or malicious alteration or destruction.
- ☐ The property that data has not been exposed to accidental or malicious alteration or destruction.

**Data Model**

In a database, the user's logical view of the data in contrast to the physically stored data, or storage structure. A description of the organization of data in a manner that reflects the information structure of an enterprise. (DoD 8320.1-M-1, "Data Element Standardization Procedures," January 15, 1993, authorized by DoD Directive 8320.1, September 26, 1991).

**Designated Approving Authority (DAA)**

The official with the authority to formally assume responsibility for operating an AIS or network at an acceptable level of risk. (NSTISSI No. 4009).

**Digital Signature**

The digital signature allows a message originator to sign (cover) data (e.g. the Hash value). This provides the recipient with the means to verify the identity of the originator (user authentication and non-repudiation).

**Distributed Interactive Simulation (DIS)**

Program to electronically link organizations operating in the four domains: advanced concepts and requirements; military operations; research, development, and acquisition; and training. (2) A synthetic environment within which humans may interact through simulation(s) at multiple sites networked using compliant architecture, modeling, protocols, standards, and databases. (DoD

5000.59-P, “Modeling and Simulation Master Plan,” October 1995, authorized by DoD Directive 5000.59, January 4, 1994).

**Domain**

A distinct functional area that can be supported by a family of systems with similar requirements and capabilities. An area of common operational and functional requirements.

**Element**

A service area, interface, or standard within the JTA document. The definitions below are abbreviated versions of those appearing elsewhere in the JTA Glossary.

- ☐ Service Area – a set of system capabilities grouped by functional areas. Both the DoD Technical Reference Model and the JTA define set(s) of service areas common to every system.
- ☐ Interface – a boundary between two functional areas in a reference model.
- ☐ Standard – a document that establishes uniform engineering and technical requirements. The mandated standards in the JTA are grouped by their applicable service areas.

**Electronic Business/Electronic Commerce**

The interchange and processing of information via electronic techniques for accomplishing transactions based upon the application of commercial standards and practices. An integral part of implementing EB/EC is the application of business process improvement or reengineering to streamline business processes prior to the incorporation of technologies facilitating the electronic exchange of business information.

**External Environment Interface (EEI)**

The interface that supports information transfer between the application platform and the external environment. (NIST Special Publication 500-230; DoD TRM, Version 1.1, 15 July 1999).

**Federate**

A member of an HLA Federation. All applications participating in a Federation are called Federates. In reality, this may include Federate Managers, data collectors, live entity surrogates, simulations, or passive viewers. See HLA Glossary:  
<<http://www.dmsomil/projects/hla/docslib/hlagloss.html>>.

**Federation**

A named set of interacting federates, a common federation object model, and supporting RTI, that are used as a whole to achieve some specific objective. See HLA Glossary:  
<<http://www.dmsomil/projects/hla/docslib/hlagloss.html>>.

**Federation Object Model (FOM)**

An identification of the essential classes of objects, object attributes, and object interactions that are supported by an HLA federation. In addition, optional classes of additional information may



also be specified to achieve a more complete description of the federation structure and/or behavior. See HLA Glossary: <<http://www.dmsomil/projects/hla/docslib/hlagloss.html>>.

**Government off-the-shelf (GOTS)**

Software applications, modules, or objects developed for Government departments or agencies and subsequently made available to other Government entities. GOTS software often will be found in reuse repositories maintained to facilitate and encourage its distribution and use.

**Graphical User Interface (GUI)**

System design that allows the user to effect commands, enter into transaction sequences, and receive displayed information through graphical representations of objects (menus, screens, buttons, etc.).

**High-Level Architecture (HLA)**

Major functional elements, interfaces, and design rules, pertaining as feasible to all DoD simulation applications, and providing a common framework within which specific system architectures can be defined. See HLA Glossary:

<<http://www.dmsomil/projects/hla/docslib/hlagloss.html>>.

**Human-Computer Interface (HCI)**

Hardware and software allowing information exchange between the user and the computer.

**Hybrid Graphical User Interface**

A GUI that is composed of tool kit components from more than one user interface style.

**Imagery**

Collectively, the representations of objects reproduced electronically or by optical means on film, electronic display devices, or other media. (JCS).

**Information Technology (IT)**

- ☐ The term “information technology,” with respect to an executive agency means any equipment or interconnected system or subsystem of equipment that is used in the automatic acquisition, storage, manipulation, management, movement, control, display, switching, interchange, transmission, or reception of data or information by the executive agency. For purposes of the preceding sentence, equipment is used by an executive agency if the equipment is used by the executive agency directly or is used by a contractor under a contract with the executive agency that (i) requires the use of such equipment, or (ii) requires the use, to a significant extent, of such equipment in the performance of a service or the furnishing of a product.
- ☐ The term “information technology” includes computers, ancillary equipment, software, firmware and similar procedures, services (including support services), and related resources.

- ☐ Notwithstanding subparagraphs (1) and (2), the term “information technology” does not include any equipment that is acquired by a Federal contractor incidental to a Federal contract. (Information Technology Management Reform Act of 1996. See: <http://www.dtic.mil/c3i/cio/references/itmra.Anot.html>).

**Institute of Electrical and Electronics Engineers (IEEE)**

An accredited standards body that has produced standards such as the network-oriented 802 protocols and POSIX. Members represent an international cross-section of users, vendors, and engineering professionals. (DoD TRM, Version 1.1, 15 July 1999).

**Intelligence**

- ☐ The product resulting from the collection, processing, integration, analysis, evaluation, and interpretation of available information concerning foreign countries or areas.
- ☐ Information and knowledge about an adversary obtained through observation, investigation, analysis, or understanding. (JP1-02).

**Interactive Model**

A model that requires human participation. Syn: human-in-the-loop. (“A Glossary of Modeling and Simulation Terms for Distributed Interactive Simulation (DIS),” August, 1995).

**Interface**

A shared boundary between two functional units. A functional unit is referred to as a entity when discussing the classification of items related to application portability.

**International Electrotechnical Commission (IEC)**

An international standards body similar to ISO, but limited by its charter to standards in the electrical and electrotechnical areas. In 1987, the ISO and IEC merged ISO Technical Committee 97 and IEC Technical Committees 47B and 83 to form ISO/IEC Joint Technical Committee (JTC) 1, which is the only internationally recognized committee dealing exclusively with information technology standards.

**International Organization for Standardization (ISO)**

The International Organization for Standardization (ISO) is a worldwide federation of national standards bodies from some 100 countries, one from each country. ISO is a non-governmental organization, established to promote the development of standardization and related activities in the world with a view to facilitating the international exchange of goods and services, and to developing cooperation in the spheres of intellectual, scientific, technological, and economic activity. ISO's work results in international agreements, which are published as International Standards.

**International Telecommunications Union - Telecommunications Standardization Sector (ITU-T)**

ITU-T, formerly called the Comité Consultatif International de Télégraphique et Téléphonique (CCITT), is part of the International Telecommunications Union, a United Nations treaty

organization. Membership and participation in ITU-T is open to private companies; scientific and trade associations; and postal, telephone, and telegraph administrations. Scientific and industrial organizations can participate as observers. The U.S. representative to ITU-T is provided by the Department of State. Since ITU-T does not have the authority of a standards body nor the authority to prescribe implementation of the documents it produces, its documents are called recommendations rather than standards.

### **Internet Engineering Task Force (IETF)**

The Internet Engineering Task Force (IETF) is a large open international community of network designers, operators, vendors, and researchers concerned with the evolution of the Internet architecture and the smooth operation of the Internet. The actual technical work of the IETF is done in its working groups, which are organized by topic into several areas (e.g., routing, transport, security). The IETF is a subdivision of the Internet Architecture Board (IAB) responsible for the development of protocols, their implementations, and standardization.

### **Interoperability**

- ☐ The ability of two or more systems or components to exchange data and use information. (IEEE STD 610.12).
- ☐ The ability of two or more systems to exchange information and to mutually use the information that has been exchanged. (Army Science Board).

### **Interworking**

The exchange of meaningful information between computing elements (semantic integration), as opposed to interoperability, which provides syntactic integration among computing elements.

### **Joint Task Force**

A joint force that is constituted and so designated by the Secretary of Defense, a combatant commander, a subunified commander, or an existing joint task force commander. Also called JTF. [Source – Joint Publication 1-02, 10 June 1998] [The JTF includes a Headquarters element and all of the Service Expeditionary Forces that support the Joint Task Force mission.]

### **Joint Technical Committee (JTC) 1**

JTC1 was formed in 1987 by merger of ISO Technical Committee 97 and IEC Technical Committees 47B and 83 to avoid development of possibly incompatible information technology standards by ISO and IEC. ANSI represents the U.S. government in ISO and JTC1.

### **Key Exchange**

The key is securely transmitted to the recipient by a secure Key Exchange. The Key Exchange process wraps (similar to encrypt) the key necessary to implement the encryption algorithm.

### **Legacy Environments**

Legacy environments could be called legacy architectures or infrastructures and as a minimum consist of a hardware platform and an operating system. Legacy environments are identified for phase-out, upgrade, or replacement. All data and applications software that operate in a legacy

environment must be categorized for phase-out, upgrade, or replacement. (DoD TRM, Version 1.1, 15 July 1999).

### **Legacy Standard**

A JTA standard that is a candidate for phase-out, upgrade, or replacement. A legacy standard may be an obsolete standard without an upgrade path, or an older version of a currently mandated JTA standard. A legacy standard is generally associated with an existing or “legacy system,” although it may be necessary in a new or upgraded system when an interface to a legacy system is required. (JTADG).

### **Legacy Systems**

Systems that are candidates for phase-out, upgrade, or replacement. Generally legacy systems are in this category because they do not comply with data standards or other standards. Legacy system workloads must be converted, transitioned, or phased out (eliminated). Such systems may or may not operate in a legacy environment. (DoD TRM, Version 1.1, 15 July 1999).

### **Live, Virtual, and Constructive Simulation**

The categorization of simulation into live, virtual, and constructive is problematic because there is no clear division between these categories. The degree of human participation in the simulation is infinitely variable, as is the degree of equipment realism. This categorization of simulations also suffers by excluding a category for simulated people working real equipment (e.g., smart vehicles). (DoD 5000.59-P, “Modeling and Simulation Master Plan,” October 1995, authorized by DoD Directive 5000.59, January 4, 1994).

- ☐ **Live Simulation.** A simulation involving real people operating real systems.
- ☐ **Virtual Simulation.** A simulation involving real people operating simulated systems. Virtual simulations inject human-in-the-loop (HITL) in a central role by exercising motor control skills (e.g., flying an airplane), decision skills (e.g., committing fire control resources to action), or communication skills (e.g., as members of a C4I team).
- ☐ **Constructive Model or Simulation.** Models and simulations that involve simulated people operating simulated systems. Real people stimulate (make inputs) to such simulations, but are not involved in determining the outcomes.

### **Market Acceptance**

Means that an item has been accepted in the market as evidenced by annual sales, length of time available for sale, and after-sale support capability. (SD-2, April 1996).

### **Metadata**

Information describing the characteristics of data; data or information about data; descriptive information about an organization's data, data activities, systems, and holdings. (DoD 8320.1-M-1, Data Standardization Procedures, August 1997).

**Model**

A physical, mathematical, or otherwise logical representation of a system, entity, phenomenon, or process. (“A Glossary of Modeling and Simulation Terms for Distributed Interactive Simulation (DIS),” August, (DoD Directive 5000.59, “DoD Modeling and Simulation (M&S) Management,” January 4, 1994); (DoD 5000.59-P, “Modeling and Simulation Master Plan,” October 1995, authorized by DoD Directive 5000.59, January 4, 1994).

**Modeling and Simulation (M&S)**

The use of models, including emulators, prototypes, simulators, and stimulators, either statically or over time, to develop data as a basis for making managerial or technical decisions. The terms “modeling” and “simulation” are often used interchangeably. (“M&S Educational Training Tool (MSETT), Navy Air Weapons Center Training Systems Division Glossary,” April 28, 1994).

**Motif**

User interface design approach based upon the “look and feel” presented in the OSF/Motif style guide. Motif is marketed by the Open Software Foundation.

**Multimedia**

The presentation of information on a medium using any combination of video, sound, graphics, animation, and text; using various input and output devices.

**National Institute of Standards and Technology (NIST)**

The division of the U.S. Department of Commerce that ensures standardization within Government agencies. NIST was formerly known as the National Bureau of Standards. NIST develops and maintains Federal Information-Processing Standards (FIPS) PUBS, the standards the Federal Government uses in its procurement efforts. Federal agencies, including DoD, must use these standards where applicable.

**National Security System**

- ☐ The term “national security system” means any telecommunications or information system operated by the United States Government, the function, operation, or use of which: (1) involves intelligence activities; (2) involves cryptologic activities related to national security; (3) involves command and control of military forces; (4) involves equipment that is an integral part of a weapon or weapons system; or (5) subject to subsection (b), is critical to the direct fulfillment of military or intelligence missions.
- ☐ LIMITATION.-Subsection (a)(5) does not include a system that is to be used for routine administrative and business applications (including payroll, finance, logistics, and personnel management applications). Information Technology Management Reform Act of 1996. See: <<http://www.dtic.mil/c3i/cio/references/itmra.Anot.html>>.

**Nondevelopmental Item (NDI)**

- ☐ Any previously developed item used exclusively for governmental purposes by a U.S. Federal, State or Local government agency or a foreign government with which the U.S. has a mutual defense cooperation agreement.
- ☐ Any item described in subparagraph 1 above that requires only minor modification in order to meet the requirements of the procuring agency.
- ☐ Any item currently being produced that does not meet the requirement of paragraphs 1 or 2 above, solely because the item is not yet in use.

(DRAFT Nondevelopmental Item, 6/30/95, HANDBOOK/ Federal Acquisition Streamlining Act of 1994 DoD 5000.37H.)

**Object Model**

A specification of the objects intrinsic to a given system, including a description of the object characteristics (attributes) and a description of the static and dynamic relationships (associations) that exist between objects. See HLA Glossary: <<http://hla.dmsi.mil/hla/general/hlagloss.html>>.

**Open System**

A system that implements sufficient open specifications for interfaces, services, and supporting formats to enable properly engineered components to be utilized across a wide range of systems with minimal changes, to interoperate with other components on local and remote systems, and to interact with users in a style that facilitates portability. An open system is characterized by the following:

- ☐ Well-defined, widely used, non-proprietary interfaces/protocols
- ☐ Use of standards which are developed/adopted by industrially recognized standards bodies
- ☐ Definition of all aspects of system interfaces to facilitate new or additional systems capabilities for a wide range of applications
- ☐ Explicit provision for expansion or upgrading through the incorporation of additional or higher-performance elements with minimal impact on the system.

(IEEE POSIX 1003.0/D15 as modified by the Tri-Service Open Systems Architecture Working Group).

**Open-Systems Approach**

An open-systems approach is a business approach that emphasizes commercially supported practices, products, specifications, and standards. The approach defines, documents, and maintains a system technical architecture that depicts the lowest level of system configuration control. This architecture clearly identifies all the performance characteristics of the system including those that will be accomplished with an implementation that references open standards and specifications. (OS-JTF).

**Operational Architecture (OA)**

An Operational Architecture is a description (often graphical) of the operational elements, assigned tasks, and information flows required to support the warfighter. It defines the type of information, the frequency of the exchange, and what tasks are supported by these information exchanges. (JTA 1.0).

**Portability**

The ease with which a system, component, body of data, or user can be transferred from one hardware or software environment to another. (DoD TRM, Version 1.1, 15 July 1999).

**Practice**

A recommended implementation or process that further clarifies the implementation of a standard or a profile of a standard. (VISP [Video Imagery Standards Profile]).

**Profile of a Standard**

An extension to an existing, approved standard that further defines the implementation of that standard in order to ensure interoperability. A profile is generally more restrictive than the base standard it was extracted from. (VISP).

**Protocol Data Unit (PDU)**

DIS terminology for a unit of data that is passed on a network between simulation applications. (DoD 5000.59-P, "Modeling and Simulation Master Plan," October 1995, authorized by DoD Directive 5000.59, January 4, 1994).

**Real Time, Real-Time**

- ☐ Real-Time is a mode of operation. Real-time systems require events, data, and information to be available in time for the system to perform its required course of action. Real-time operation is characterized by scheduled event, data, and information meeting their acceptable arrival times. (OS-JTF).
- ☐ Absence of delay, except for the time required for transmission. (DoD HCI Style Guide).

**Real-Time Control System**

Systems capable of responding to external events with negligible delays. (DoD HCI Style Guide).

**Real-Time Systems**

Systems that provide a deterministic response to asynchronous inputs. (OS-JTF).

**Reconnaissance**

A mission undertaken to obtain, by visual observation or other detection methods, information about the activities and resources of an enemy or potential enemy, or to secure data concerning the meteorological, hydrographic, or geographic characteristics of a particular area. (JP1-02).

**Reference Model**

A reference model is a generally accepted abstract representation that allows users to focus on establishing definitions, building common understandings, and identifying issues for resolution. For Warfare and Warfare Support System (WWSS) acquisitions, a reference model is necessary to establish a context for understanding how the disparate technologies and standards required to implement WWSS relate to each other. Reference models provide a mechanism for identifying key issues associated with portability, scalability, and interoperability. Most importantly, reference models will aid in the evaluation and analysis of domain-specific architectures. (TRI-SERVICE Open Systems Architecture Working Group).

**Runtime Infrastructure (RTI)**

The general-purpose distributed operating system software that provides the common interface services during the runtime of an HLA federation. See HLA Glossary:

**<<http://hla.dmsomil/hla/general/hlagloss.html>>.**

**Scalability, Scaleability**

- ☐ The capability to adapt hardware or software to accommodate changing work loads. (OS-JTF).
- ☐ The ability to use the same application software on many different classes of hardware/software platforms from personal computers to super computers (extends the portability concept). The ability to grow to accommodate increased work loads. (TAFIM, Version 3.0, Volumes 1 and 3).

**Secondary Imagery Dissemination (SID)**

The process for the post-collection electronic transmission or receipt of C3I-exploited non-original imagery and imagery-products in other than real- or near-real-time.

**Security**

- ☐ The combination of confidentiality, integrity, and availability.
- ☐ The quality or state of being protected from uncontrolled losses or effects. Note: Absolute security may in practice be impossible to reach; thus the security “quality” could be relative. Within state models of security systems, security is a specific “state” that is to be preserved under various operations.

**Service Area**

A set of capabilities grouped into categories by function. The JTA defines a set of services common to DoD information systems.

**Simulation Object Model (SOM)**

A specification of the intrinsic capabilities that an individual simulation offers to federations. The standard format in which SOMs are expressed provides a means for federation developers to quickly determine the suitability of simulation systems to assume specific roles within a federation. See HLA Glossary: **<<http://hla.dmsomil/hla/general/hlagloss.html>>.**



**Specification**

A document prepared to support acquisition that describes the essential technical requirements for purchased materiel and the criteria for determining whether those requirements are met. (DoD 4120.3-M).

**Standard**

A document that establishes uniform engineering and technical requirements for processes, procedures, practices, and methods. Standards may also establish requirements for selection, application, and design criteria of material. (DoD 4120.3-M).

**Standards-Based Architecture**

An architecture based on an acceptable set of standards governing the arrangement, interaction, and interdependence of the parts or elements that together may be used to form a weapon system, and whose purpose is to ensure that a conformant system satisfies a specified set of requirements. (OS-JTF).

**Standards Profile**

A set of one or more base standards and, where applicable, the identification of those classes, subsets, options, and parameters of those base standards necessary for accomplishing a particular function. (DoD TRM, Version 1.1, 15 July 1999).

**Standard Simulator Database Interchange Format (SIF)**

A DoD data exchange standard (MIL-STD-1821) adopted as an input/output vehicle for sharing externally created simulator databases among the operational system training and mission rehearsal communities.

**Surveillance**

The systematic observation of aerospace, surface or subsurface areas, places, persons, or things, by visual, aural, electronic, photographic, or other means. (JP1-02).

**Synthetic Environment Data Representation and Interchange Specification (SEDRIS)**

The specification encompasses a robust data model, data dictionary, and interchange format supported by read-and-write application programmer's interfaces (APIs), data viewers, a data model browser, and analytical verification and validation data model compliance tools.

**Synthetic Environments (SE)**

Interneted simulations that represent activities at a high level of realism from simulations of theaters of war to factories and manufacturing processes. These environments may be created within a single computer or a vast distributed network connected by local and wide area networks and augmented by super-realistic special effects and accurate behavioral models. They allow visualization of and immersion into the environment being simulated. (DoD 5000.59-P, "Modeling and Simulation Master Plan," October 1995, authorized by DoD Directive 5000.59, January 4, 1994); (CJCSI 8510.01, Chairman of the Joint Chiefs of Staff Instruction 8510.01, "Joint Modeling and Simulation Management," February 17, 1995).

**System**

- ☐ People, machines, and methods organized to accomplish a set of specific functions. (FIPS 11-3).
- ☐ An integrated composite of people, products, and processes that provides a capability or satisfies a stated need or objective. (DoD 5000.2).

**Systems Architecture (SA)**

A description, including graphics, of the systems and interconnections providing for or supporting a warfighting function. The SA defines the physical connection, location, and identification of the key nodes, circuits, networks, warfighting platforms, etc., and allocates system and component performance parameters. It is constructed to satisfy Operational Architecture requirements in the standards defined in the Technical Architecture. The SA shows how multiple systems within a domain or an operational scenario link and interoperate, and may describe the internal construction or operations of particular systems in the SA.

**Technical Architecture (TA)**

The minimal set of rules governing the arrangement, interaction, and interdependence of the parts or elements whose purpose is to ensure that a conformant system satisfies a specified set of requirements. The technical architecture identifies the services, interfaces, standards, and their relationships. It provides the technical guidelines for implementation of systems upon which engineering specifications are based, common building blocks are built, and product lines are developed.

**Technical Reference Model (TRM)**

A conceptual framework that provides the following:

- ☐ A consistent set of service and interface categories and relationships used to address interoperability and open-system issues.
- ☐ Conceptual entities that establish a common vocabulary to better describe, compare, and contrast systems and components.
- ☐ A basis (an aid) for the identification, comparison, and selection of existing and emerging standards and their relationships.
- ☐ The framework is not an architecture, is not a set of standards, and does not contain standards.

**Video**

Electro-Optical imaging sensors and systems that generate sequential or continuous streaming imagery at specified rates. Video standards are developed by recognized bodies such as ISO, ITU, SMPTE, EBU, etc. (VISP).

**Weapon Systems**

A combination of one or more weapons with all related equipment, materials, services, personnel and means of delivery and deployment (if applicable) required for self sufficiency. (JCS Pub 1-02)  
See also National Security Systems.

Page intentionally left blank

# Standards Index

## A

### Allied Communications Publication (ACP)

ACP-120, Common Security Protocol (CSP), Rev A **89**

ACP-123, Common Messaging Strategy and Procedures **46**

ACP-123, U.S. Supplement No. 1, Common Messaging Strategy and Procedures **46**

### AMPEX

Digital Instrumentation Recorder DCRSi 240 User Manual **109**

### ANSI

ASC X12 Electronic Data Interchange (ASC X12S 97-372 is latest edition) **136**

HL7 **136**

MH10.8.3M-1996 **160**

PC-D-350D, Printed Board Description in Digital Form **135**

S4.40-1992/AES3-1992, AES (Audio Engineering Society) Recommended Practice for Digital Audio Engineering - Serial transmission format for two-channel linearly represented digital audio data, 1992 (reaffirmed and amended 1997) **31**

T1.105, Telecommunications - Synchronous Optical Network (SONET) Basic Description Including Multiplex Structure, Rates and Formats (ATIS) (Revision and Consolidation of ANSI T1.105-1991 and ANSI T1.105A-1991), 1995 **62**

T1.107, Digital Hierarchy - Format Specifications **62**

T1.111, Signaling System No. 7, Message Transfer Part **56**

T1.112, Signaling System No. 7, Signaling Connection Control Part Functional Description **56**

T1.113, Signaling System No. 7, ISDN User Part **56**

T1.114, Signaling System No. 7, Transaction Capability Application Part **56**

T1.117, Digital Hierarchy - Optical Interface Specifications (SONET) (Single Mode Short Reach) **62**

T1.204, OAM&P - Lower Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements **63**

T1.208, OAM&P - Upper Layer Protocols for TMN Interfaces Between Operations Systems and Network Elements **63**

T1.408, ISDN Primary Rate - Customer Installation Metallic Interfaces, Layer 1 Specification **56**

T1.601, ISDN Basic Access Interface for Use on Metallic Loops for Application on the Network Side of the NT, Layer 1 Specification **56**

T1.602, ISDN Data Link Signaling Specification for Application at the User Network Interface **56**

T1.605, ISDN Basic Access Interface for S and T Reference Points - Layer 1 Specification **56**

T1.607, Digital Subscriber Signaling System No. 1 (DSS1) - Layer 3 Signaling Specification for Circuit Switched Bearer Service **56**

T1.610, DSS1 - Generic Procedures for the Control of ISDN Supplementary Services **56**

T1.619, Multi-Level Precedence and Preemption Service **56**

T1.619a, Supplement **56**

VITA 1, VME64 Specification **191**

X12N 270, Version 004010X092, Health Care Eligibility/Benefit Inquiry **166**

X12N 271, Version 004010X092, Health Care Eligibility/Benefit Information Response **166**

X12N 276, Version 004010X093, Health Care Claim Status Request **166**

X12N 277, Version 004010X093, Health Care Claim Status Response **166**

X12N 278, Version 004010X094, Health Care Services Request for Review and Response **166**

X12N 820, Version 004010X061, Payroll Deducted and Other Group Premium Payment for Insurance Products **166**

X12N 834, Version 004010X095, Health Care Benefits and Enrollment and Maintenance **166**

X12N 835, Version 004010X091, Health Care Claim Payment/Advice **166**

X12N 837, Version 004010X096, Health Care Claim Institutional **166**

X12N 837, Version 004010X097, Health Care Claim Dental **166**

X12N 837, Version 004010X098, Health Care Claim Professional **166**

X3.131, Information Systems - Small Computer Systems Interface - 2 (SCSI-2) **191, 202**

X3.131, Information Systems - Small Computer Systems Interface-2 (SCSI-2) **206**

X3.175, 19-mm Type ID-1 Recorded Instrumentation-Digital Cassette Tape Form **109**

X3.230-1994 (FC-PH) Fibre Channel Physical and Signaling Interface **113**

X3.230-1994/AM 2-1996, Information Technology - Fibre Channel - Physical and Signaling Interface (FC-PH) with Amendments **108**

### ANSI/AIM

BC1-1995, Uniform Symbology Specification Code 39, 16 August 1995 **135**

### ANSI/EIA

330, Electrical Performance Standards for Closed Circuit Television Camera 525/60 Interlaced 2 1 (ANSI/EIA 330-68) **191**

### ANSI/IEEE

1076, 1993, VHDL Language Reference Manual **135**  
754-1985, IEEE standard for Binary Floating Point Arithmetic, March 21, 1985 **40**

### ANSI/ISO

8859-1 1987, Information Processing - 8-Bit Single Byte Coded Graphic Character Sets - Part 1, Latin Alphabet No. 1 **35**

### ANSI/ISO/IEC

8632 Information Technology - Computer Graphics - Metafile for the Storage and Transfer of Picture

- Description Information (part 1, 1992 Functional Specifications (with amendment 1, 1994 and amendment 2, 1995) **135**  
 9636-1,2,3,4,5,6,1991 (R1997), Information Technology Computer Graphics Interfacing (CGI) Techniques for Dialogue with Graphics Devices **33**
- ANSI/SMPTE**  
 12M-1998, Time and Control Code for Video and Audio Tape for 525 Line/60 Field Television Systems **29**  
 259M-1997, Television - 10 bit 4-2-2 Component (Serial Digital Interface) **29**  
 274M-1995, Television - 1920 x 1080 Scanning and Interface **30**  
 292M-1998, Television - Bit-Serial Digital Interface for High-Definition Television Systems **29**  
 293M-1996, Television - 720 x 483 Active Line at 59.94-Hz Progressive Scan Production - Digital Representation **29**  
 296M-1997, Television - 1270 x 720 Scanning, Analog and Digital Representation and Analog Interface **29**  
 309M-1998, Transmission of Date and Time Zone Information in Binary Groups of Time and Control Code **29**
- ANSI/US**  
 Product Data Association (PRO)-100-1996, Initial Graphics Exchange Specification (IGES), V5.3 **135**
- ANSI/VITA**  
 1-1994, American National Standard for VME64 **115**
- ASTM**  
 E1238-97, Standard Specification for Transferring Clinical Observations between Independent Computer Systems **167**  
 E1239-94, Standard Guide for Description of Reservation/Registration-Admission, Discharge, Transfer (R-ADT) Systems for Automated Patient Care Information Systems **167**  
 E1284-97, Standard Guide for Construction of a Clinical Nomenclature for Support of Electronic Health Records **167**  
 E1384-96, Standard Guide for Content and Structure of the Computer-Based Patient Record **167**  
 E1460-92, Standard Specification for Defining and Sharing Modular Health Knowledge Bases **168**  
 E1712-97, Standard Specification for Representing Clinical Laboratory Test and Analyte Names **168**  
 E1713-95, Standard Specification for Transferring Digital Waveform Data between Independent Computer Systems **168**  
 E1714-95, Standard Guide for Properties of a Universal Healthcare Identifier **168**  
 E1715-95, Standard Practice for An Object-Oriented Model for Registration, Admitting, Discharge, and Transfer (R-ADT) Functions in Computer-Based Patient Record Systems **168**
- ATM Forum**  
 af-ilmi-0065.000 **58**
- af-lane-0021.000 **58**  
 af-lane-0038.000 **58**  
 af-lane-0050.00 **58**  
 af-lane-0057.000 **58**  
 af-lane-0084.000 **67**  
 af-phy-0015.000 **57**  
 af-phy-0016.000 **58**  
 af-phy-0040.000 **57**  
 af-phy-0043.000 **58**  
 af-phy-0046.000 **58**  
 af-phy-0054.000 **58**  
 af-phy-0064.000 **58**  
 af-pnni-0055.000 **58**  
 af-pnni-0066.000 **58**  
 af-sec-0096.000 **67**  
 af-sig-0061.000 **58**  
 af-sig-0076.000 **66**  
 af-tm-0056.000 **58**  
 af-tm-0077.000 **66**  
 af-uni-0010.002 **57, 58**  
 af-vtoa-0078.000 **58**  
 af-vtoa-0089.000 **67**  
 af-vtoa-0113.000 **67**  
 af-vtoa-0119.00, Low Speed Circuit Emulation Service **67**
- ATMI**  
 RTCA DO-181A, Minimum Operational Performance Standards for Air Traffic Control Radar Beacon System/Mode Select (ATCRBS/Mode S), Airborne Equipment **187**  
 RTCA DO-210C, Minimum Operational Performance Standards For Aeronautical Mobile Satellite Services (AMSS) **187**  
 RTCA DO-212, Minimum Operational Performance Standards for Airborne Automatic Dependent Surveillance (ADS) Equipment **187**  
 RTCA DO-219, Minimum Operational Performance Standards for ATC Two-Way Data Link Communications **187**
- ATSC**  
 A/52 (Audio), Dolby Digital AC3 **40**  
 A/53, Digital Television Standard, 16 September 1995 **182**
- Aviation Industry CBT Committee (AICC)**  
 AGR 006, Computer Managed Instruction (CMI), V2.0, 1998 May 19 **43**
- B**
- Ballistic Missile Defense Organization (BMDO)**  
 BMD-P-SD-92-000002-A, Ballistic Missile Defense Navigation Standard, 23 June 1993 **195**
- Bellcore**  
 GR-253 Synchronous Optical Network (SONET) Transport Systems  
 Common Generic Criteria, Rev01, Bellcore **131**  
 GR-253, Sonet Common Generic Criteria, Rev01, December 1997 **131**

**C**

- C-Cubed Microsystems
  - JPEG File Interchange Format, Version 1.02, Sept 1, 1993 **25**
- Chairman Joint Chiefs of Staff (CJCS)
  - Emergency Action Procedures (EAP), Volume V, CJCS Control Orders (U), revised annually, U.S. Top Secret **120**
- CompuServe Incorporated
  - Graphics Interchange Format (GIF) Version 89a 31 July 1990 **26**
- Contract Data Requirements List (CDRL)
  - 135C-03, V3.0, 5 March 1999, HMI Direct ICD, Human-Machine Interface Design Criteria **120**

**D**

- Defense Information Infrastructure Common Operating Environment, Integration and Runtime Specification (I&RTS) **18**
- Defense Information Systems Agency (DISA)
  - Circular (DISAC) 310-225-1, Defense Switched Network (DSN) User Services Guide **57**
  - Multi-functional Information Distribution System (MIDS) **77**
- Defense Modeling and Simulation Office (DMSO)
  - Object Model Template Data Interchange Format, Version 1.3, February 1998 **173**
- Department of Defense (DoD)
  - 5015.2-STD, Design Criteria Standard for Electronic Records Management Software Applications, November 1997 (Sections 2.2.1-2.2.1.1 only) **42**
  - 5200.28-STD, DoD Trusted Computer System Evaluation Criteria (TCSEC) **90**
  - 5200.28-STD, The DoD Trusted Computer System Evaluation Criteria **87, 89**
  - 5200.28-STD, The DoD Trusted Computer System Evaluation Criteria, December 1985 **86**
  - 8320.1-M-1, DoD Data Standardization Procedures, Manual **74**
  - AIMS 97-1000, Performance/Design and Qualification Requirements Technical Standard For The ATCRBS/IFF/MARK XII Electronic Identification System and Military Mode S **183**
  - AIMS 97-90, Performance/Design And Qualification Requirements Mode 4 Input/Output Data **183**
  - ATM Addressing Plan **59**
  - Calendar Date, DDDS Counter ID #195 **74**
  - Defense Data Dictionary System (DDDS) **74**
  - Human-Computer Interface Style Guide, 30 April 1996 **80, 82, 90**
  - ordinal date, DDDS counter ID #165 **74**
  - Secure Intelligence Data Repository (SIDR) **74**
  - User Interface Specification for the Defense Information Infrastructure, Version 3.0, February 1998 **82**

- year date, DDDS Counter ID #166 **74**
- Department of Transportation (DOT)
  - FAA 1010.51A, US National Aviation Standard for the Mark X (SIF) Air Traffic Control Radar Beacon System **183**
- DGI Working Group
  - Digital Geographic Information Exchange Standard (DIGEST), Edition 2.0, June 1997 **39**
- DICOM
  - Digital Imaging and Communications in Medicine (DICOM) **165**

**E**

- EIA/TIA
  - 232-F, Interface Between Data Terminal Equipment and Data Circuit Terminating Equipment Employing Serial Binary Data Interchange **55**
  - 530-A, High Speed 25-Position Interface for Data Terminal Equipment and Data Circuit Terminating Equipment, Including Alternative 26-Position Connector **55**
- Electronic Industry Association (EIA)
  - 170, Electrical Performance Standards - Monochrome Television Studio Facilities **191, 210**
  - 343-A, Electrical Performance Standard for High Resolution Monochrome Closed Circuit Television Camera **191**
  - RS-422, Electrical Characteristics of Balanced Voltage Digital Interface Circuits **131**

**F**

- Federal Information Processing Standard (FIPS)
  - draft 46-3, Data Encryption Standard (DES) **99**
  - PUB 10-4, Countries, Dependencies, Areas of Special Sovereignty, and Their Principal Administrative Divisions, April 1995 **26**
  - PUB 112, Password Usage **87**
  - PUB 140-1, Security Requirements for Cryptographic Modules **88, 96**
  - PUB 161-2 **164**
  - PUB 172-1 VHSIC Hardware Description Language (VHDL) **135**
  - PUB 180-1, Secure Hash Algorithm **96**
  - PUB 180-1, Secure Hash Algorithm-1, April 1995 **88**
  - PUB 184 **73**
  - PUB 184, Integration Definition For Information Modeling (IDEF1X), December 1993 **73**
  - PUB 185, SKIPJACK algorithm, February 1994, NSA, R21-TECH 044-91 **88**
  - PUB 186-1, Digital Signature Standard (DSS) Digital Signature Algorithm (DSA) **88**
  - PUB 46 **98**
  - PUB 46-1 **98**
  - PUB 46-3, Data Encryption Standard **96**
  - PUB 74 **98**

**PUB 81 98**

Federal Telecommunications Recommendation (FTR)  
1080A-1998, Appendix A, Video Teleconferencing  
Profile **50**

**H****HDR-SSS-01-S-REC0 119**

Health Industry Business Communications Council  
(HIBCC)

Universal Product Number (UPN) System, 1996 (for  
identifying medical and surgical products in the  
supply chain) **165**

Health Level Seven Organization (HL7)  
**165**

**I****ICD**

ICD-GPS-200C, NAVSTAR GPS Space Segment/  
Navigation User Interfaces, 16 October 1997 **53**

ICD-GPS-222A, NAVSTAR GPS UE Auxiliary  
Output Chip Interface (U), 26 April 1996 **53**

ICD-GPS-225A, NAVSTAR GPS Selective  
Availability/Anti-spoofing Host Application  
Equipment Design Requirements with the Precise  
Positioning Service Security Module (U), 12 March  
1998 **53**

**IEEE**

(P) Standard 1516.2, Modeling and Simulation  
(M&S) High Level Architecture (HLA) Object Model  
Template (OMT) Specification. **172**

1003.13, Standardization Applications Environment  
Profile, POSIX Realtime API **34**

1003.2d 1994, POSIX - Part 2, Shell and Utilities,  
Amendment, Batch Environment **34**

1003.5b 1996, POSIX Ada Language Interfaces -  
Part 1, Binding for System API, Amendment 1,  
Realtime Extensions (incorporates 1003.5 1992) **35**

1003.5g 1999, POSIX - Part 1, Binding for System  
API, Amendment g, Real-time extensions **34**

1076 1993, Standard VHSIC Hardware Description  
Language Reference Manual **180**

1076.2, VHDL Mathematical Package, 1996 **180**

1076.3, Standard VHDL Synthesis Packages,  
1997 **180**

1101.2, Standard for Mechanical Core Specifications  
for Conduction-Cooled Eurocards (ANSI) **191**

1101/2-1992, Standard for Mechanical Core  
Specifications for Conduction Cooled  
Eurocards **115**

1149.1-1990 IEEE Standard Test Access Port and  
Boundary-Scan Architecture **153**

1149.5-1995 IEEE Standard for Module Test and  
Maintenance Bus (MTM-Bus) Protocol **153**

1155-1992, IEEE Standard for VMEbus Extensions  
for Instrumentation **115**

1226.11-1998 ABBET Test Resource Information  
Model **149**

1226.3-1998 ABBET Resource Management  
Services **149**

1226.3-1998 Software Interfaces for Resource  
Management Services **154**

1232.1-1997, Trial Use Standard for AI-ESTATE  
Data and Knowledge Specification. **150**

1232.2-1998, Trial Use Standard for AI-ESTATE  
Service Specification **150**

1232-1998, Artificial Intelligence Exchange and  
Service Tie to All Test Environments (AI-ESTATE)  
Overview and Architecture **150**

1320.1-1998, IEEE Standard for Functional  
Modeling Language—Syntax and Semantics for  
IDEF0 **73**

1320.2-1998, IEEE Standard Conceptual Modeling  
Language-Syntax and Semantics for IDEF1X97  
(IDEFobject) **77**

1484.1, Architecture and Reference Model. Base  
Document entitled, Learning Technology Systems  
Architecture (LTSA), Version 4.00, 1998-05-21 **43**

1545-1999 Trial Use Standard for Parametric Data  
Logging and Format **153**

802.10 **94**

802.10, IEEE Standards for Local and Metropolitan  
Area Networks (MANs) **99**

802.10, Standards for Local and Metropolitan  
Networks, Interoperable LAN/MAN Security  
(SILS) **94**

802.10a, Standard for Interoperable LAN Security -  
The Model, Draft **99**

802.10c-1998, Interoperable LAN/MAN Security Key  
Management **94**

802.11-1997 Part II, Wireless LAN Medium Access  
Control and Physical Layer Specifications **66**

802.1p **65**

802.1q **65**

802.3-1998, Local and Metropolitan Area Networks-  
Specific Requirements-Part 3

Carrier Sense Multiple Access with Collision  
Detection (CSMA/CD) Access Method and  
Physical Layer Specifications **67**

802.3u-1995, Supplement to ISO/IEC 8802-3 1993,  
Local and Metropolitan Area Networks - Media  
Access Control (MAC) Parameters, Physical Layer,  
Medium Attachment Units, and Repeater for 100  
Mbps Operation, Type 100BASE-T **55**

802.3z, 1998 Gigabit Ethernet **113**

Computer Society Test Technology Technical  
Committee Test Requirements Model (TeRM) **151**

P 1516, Modeling and Simulation High Level  
Architecture, Framework and Rules, Version  
1.3 **172**

P 1516.1, Modeling and Simulation High Level  
Architecture Federate Interface Specification,  
Version 2, 23 April 1999 **172**



- P1003.13a/D1 Standard for Information Technology - Standardized Application Environment Profile - POSIX Realtime Application Support (AEP) - Amendment a, Realtime Extension, September 1999 **41**
- P1003.1a Draft Standard for Information Technology - Portable Operating System Interface (POSIX) - Part 1, System Application Program Interface (API), C Language, - Amendment, Draft 16, December 1998 **41**
- P1003.1d D13, April 1999, Standard for Information Technology - Portable Operating System Interface (POSIX) Part 1, System Application Program Interface (API) - Amendment d, Additional Realtime Extensions, C Language, Draft 11, May 1998 **41**
- P1003.1g Information Technology - Portable Operating System Interface (POSIX) - Part xx Protocol Independent Interfaces (PII) Draft 6.6, March 1997 **41**
- P1003.1h, D9, July 1999  
Services for Reliable, Available, Serviceable Systems **41**
- P1003.1j D9, July 1999, Standard for Information Technology - Portable Operating System Interface (POSIX) - Part 1, System Application Program Interface (API) - Amendment j, Advanced Realtime Extensions, C Language, Draft 7, October 1998 **41**
- P1003.1m, Draft Standard for Information Technology - Portable Operating System Interface (POSIX) - Part 1, System Application Program Interface (API) - Amendment m, Checkpoint/Restart Interface, C Language, Draft 2, November 1998 **41**
- P1003.1q, Draft Standard for Information Technology - Portable Operating System Interface (POSIX) Part 1, System Application Program Interface (API) - Amendment q, Trace, C Language, Draft 5, July 1999 **41**
- P1003.21 Draft Standard for Information Technology - Portable Operating System Interface (POSIX) - Part 1, Realtime Distributed Systems Communication Application Program Interface (API), Language-Independent, V2.0, August 1998 **41**
- P1003.5c/D3 POSIX-Part 1-Binding for API - Amendment 2-Protocol Independent Interfaces **179**
- P1003.5f POSIX-Ada Binding to 1003.21 **179**
- P1003.5g, D1.0 Standard for Information Technology - Portable Operating System Interface (POSIX) - Ada Language Interfaces - Part 1, Binding for System Application Program Interface (API) -Amendment g, Realtime Extensions, September 1999 **41**
- P1149.4-1999 Mixed-Signal Test Bus **153**
- P1226.10, ABBET Run Time Services **155**
- P1226.11-1998, ABBET Test Resource Information Model **151**
- P1226.11-1998.ABBET Test Resource Information Model **150**
- P1226.13-1998 ABBET Parametric Data Log Format **153**
- P1386.1/D2.0, Physical/Environmental Layers for Peripheral Component Interface (PCI) Mezzanine Cards (PMC) **182**
- P1445-1998, Standard for Digital Test Interchange Format (DTIF) **149**
- P1484.12, Learning Object Metadata (LOM), Version 2.5a December 1998 **43**
- P1484.2, Learner Model. Base Document entitled, Personal and Performance Information (PAPI) Specification, Draft Version 5, 15 January 1999 **43**
- P1522 IEEE Testability Standard **153**
- P1552-1999, Standard Architecture for Test Systems **156**
- STD 610.12 **203**
- Intel
- PCI (cPCI) Version 1.0, 1996 **115**
- PCI Industrial Computer Manufacturer's Group (PICMG) Compact PCI Specification, R2.1 **191, 206**
- Peripheral Component Interconnect (PCI) Standard Version 2.2, 1999 **114**
- Personal Computer Memory Card International Association (PCMCIA) PC Card Standard **115, 191, 206**
- Personal Industrial Computer Manufacturer's Group (PICMG)  
Compact PCI Specification, R2.1 **202**
- Interchangeable Virtual Instruments (IVI)  
Aug 98  
IviFGen - Function Generator/Arbitrary Waveform Generator Class **149**  
IviPower - Power Supply Class **149**  
IviSwitch - Switch Matrix/Multiplexor Class **149**  
IviDmm - Digital Multimeter Class, August 1998 **149**  
VI-4 Aug 98, IviScope Class **149**
- International Civil Aviation Organization (ICAO)  
Aeronautical Telecommunications, Annex 10 **183**  
Annex 10, Volume III, SARPs for High Frequency Data Link (HFDL) **187**
- International Organization for Standardization (ISO)  
10303 Industrial Systems and Integration **137**  
8879, Information Processing-Text and office systems - Standard Generalized Markup Language (SGML) with Amendment 1, 1988 **24**  
9660, 1988, Information processing - Volume and file structure of CD-ROM for information interchange **32**  
FDIS 15408, Common Criteria, Version 2.0, October 1998 **91**  
UN/EDIFACT **136**
- International Society for Blood Transfusion (ISBT)  
128, Bar Code Symbology and Application Specification for Labeling of Whole Blood and Blood Components, 1995 **165**
- International Telecommunication Union (ITU-T)  
E.164, Numbering Plan for the ISDN Era **57**  
H.244, Synchronized Aggregation of Multiple 64 or 56 Kbps channels **52**

- H.310, Video Teleconferencing **65**
- H.320, Narrow Band Visual Telephone Systems and Terminal Equipment **50**
- H.321, Video Teleconferencing **65**
- H.323, Packet-based Multimedia Communications Systems **51**
- H.323, Video Teleconferencing **65**
- H.324, Terminal for Low Bit Rate Multimedia Communications **51**
- I.363.1 **58**
- I.363.5 **58**
- M.3207.1, TMN management service, -maintenance aspects of B-ISDN management **63**
- M.3400, TMN Management Functions **63**
- Rec. X.509 (ISO/IEC 9594-8.2), Version 3, The Directory, Authentication Framework **89**
- T.120, Transmission Protocols for Multimedia Data **50, 51**
- X.500 Directory Services Standard **47**
- X.509, Information Technology - Open Systems Interconnection - The Directory **95**
- International Telecommunication Union (ITU-R)
  - BT.601-4, Encoding Parameters of Digital Television for Studios, 1994 **28**
  - Recommendation TF.460-4, Standard-frequency and Time-signal Emissions, July 1986 **33**
- Internet Engineering Task Force (IETF)
  - 37/RFC-826, An Ethernet Address Resolution Protocol **55**
  - 41/RFC-894, Standard for the Transmission of IP Datagrams over Ethernet Networks **55**
  - IDUP-GSS-API, Independent Data Unit Protection Generic Security Service Application Program Interface (IDUP-GSS-API), draft-ietf-cat-idup-gss-07.txt **92**
  - Informational RFC 1770, IPv4 Option for Sender Directed Multi-Destination Delivery, 28 March 1995 **49**
  - RFC 1471, Definitions of Managed Objects for the Link Control Protocol of the Point-to-Point Protocol **69**
  - RFC 1473, Definitions of Managed Objects for the IP Network Control Protocol of the Point-to-Point Protocol **69**
  - RFC 1474, Definitions of Managed Objects for the Bridge Network Control Protocol of the Point-to-Point Protocol **69**
  - RFC 1567 **270**
  - RFC 1612, DNS Resolver MIB Extensions **69**
  - RFC 1770, IPv4 Option for Sender Directed Multi-Destination Delivery **54**
  - RFC 1777 **64**
  - RFC 1829, The ESP DES-CBC Transform **99**
  - RFC 1990, PPP Multilink Protocol **68**
  - RFC 2011, SNMPv2 Management Information Base for the Internet Protocol **69**
  - RFC 2012, SNMPv2 Management Information Base for the Transmission Control Protocol (TCP) **69**
  - RFC 2065, DNS Security Extensions **99**
  - RFC 2078, Generic Security Service Application Program Interface **92**
  - RFC 2104, HMAC
    - Keyed-Hashing for Message Authentication **99**
  - RFC 2205, Resource ReSerVation Protocol RSVP Version 1 Functional Specification **65**
  - RFC 2207, RSVP Extensions for IPSEC Data Flows **65**
  - RFC 2228, File Transfer Protocol **100**
  - RFC 2246, The Transport Layer Security (TLS) **91**
  - RFC 2248 **69**
  - RFC 2314, PKCS #10, Certification Request Syntax **96**
  - RFC 2315, Public Key Cryptography Standard (PKCS) #7, Cryptographic Message Syntax **96**
  - RFC 2374, IPv6 Aggregatable Global Unicast Address Format **64**
  - RFC 2380 **65**
  - RFC 2401, Security Architecture for the Internet Protocol **99**
  - RFC 2402, IP Authentication Header **99**
  - RFC 2405, The ESP CBC-Mode Cipher Algorithm with Explicit IV **99**
  - RFC 2406, IP Encapsulating Security Payload (ESP) **99**
  - RFC 2407, Internet Draft, The Internet IP Security Domain of Interpretation for ISAKMP **99**
  - RFC 2408, Internet Security Association and Key Management Protocol (ISAKMP) **99**
  - RFC 2420, The PPP Triple-DES Encryption Protocol (3DESE) **99**
  - RFC 2451, The ESP CBC-Mode Cipher Algorithms **98, 99**
  - RFC 2452, IP Version 6 Management Information Base for the Transmission Control Protocol **64**
  - RFC 2454, IP Version 6 Management Information Base for the User Datagram Protocol **64**
  - RFC 2460, Internet Protocol, Version 6 (IPv6) Specification **64**
  - RFC 2461, Neighbor Discovery for IP Version 6, (IPv6) **64**
  - RFC 2462, IPv6 Stateless Address Autoconfiguration **64**
  - RFC 2463, Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification **64**
  - RFC 2464, Transmission of Ipv6 Packet Over Ethernet Networks **64**
  - RFC 2466, Management Information Base for IP Version 6
    - ICMPv6 Group **64**
  - RFC 2487, SMTP Service Extension for Secure SMTP over TLS **91**
  - RFC 2559 **95**
  - RFC 2587, Internet X.509 Public Key Infrastructure LDAPv2 Schema **95**
  - RFC-1034 **47**
  - RFC-1035 **47**

- RFC-1305, Network Time Protocol (Version 3) Specification, Implementation, and Analysis **47**
- RFC-1332, PPP Internet Protocol Control Protocol (IPCP) **55**
- RFC-1356, Multiprotocol Interconnect on X.25 and ISDN in the Packet Mode **57**
- RFC-1472, Definitions of Managed Objects for the Security Protocol of the Point-to-Point Protocol, June 1993 **69**
- RFC-1508 **91**
- RFC-1510, The Kerberos Network Authentication Service **87**
- RFC-1514, Host Resources MIB **63**
- RFC-1542 Clarifications and Extensions for the Bootstrap Protocol **48**
- RFC-1542, Clarifications and Extensions for the Bootstrap Protocol **53**
- RFC-1567, X.500 Directory Monitoring MIB **69**
- RFC-1570, PPP LCP Extensions **55**
- RFC-1618, PPP over ISDN **57**
- RFC-1657, Definitions of Management Objects for the Fourth Version of the Border Gateway Protocol (BGP-4) using SMIv2 **69**
- RFC-1695, Definitions of Management Objects for ATM Management version 8.0 using SMIV2 **69**
- RFC-1738, Uniform Resource Locators (URL) **48**
- RFC-1757, Remote Network Monitoring Management Information Base **63**
- RFC-1771, A Border Gateway Protocol 4 (BGP-4) **54**
- RFC-1772, Application of the Border Gateway Protocol in the Internet **54**
- RFC-1777, Lightweight Directory Access Protocol **47**
- RFC-1808, Relative Uniform Resource Locators **48**
- RFC-1812, Requirements for IP Version 4 Routers **53**
- RFC-1850, Open Shortest Path First (OSPF) Version 2 Management Information Base **63**
- RFC-1945, Hypertext Transfer Protocol **48**
- RFC-1989, PPP Link Quality Monitoring (LQM) **55**
- RFC-1994, PPP Challenge Handshake **55**
- RFC-2001, TCP Slow Start, Congestion Avoidance, Fast Retransmit, and Fast Recovery Algorithms **49**
- RFC-2002, entitled IP Mobility Support **65**
- RFC-2006, Definitions of Managed objects for IP Mobility Support using SMIv2 **69**
- RFC-2013, SNMPv2 Management Information Base for the User Datagram Protocol (UDP) **69**
- RFC-2021, Remote Network Monitoring Management Information Base Version 2, using SMIv2 **69**
- RFC-2131, Dynamic Host Configuration **53**
- RFC-2131, Dynamic Host Configuration Protocol **48**
- RFC-2132, DHCP Options and BOOTP Vendor Extensions **48, 53**
- RFC-2138, Remote Authentication Dial In User Service (RADIUS) **92**
- RFC-2236 **64**
- RFC-2248, Network Services Monitoring MIB **69**
- RFC-2249, Mail Monitoring MIB **69**
- RFC-2251 **64**
- RFC-2289, A One-Time Password System **92**
- RFC-768 **49**
- RFC-854 **47**
- RFC-855 **47**
- RFC-951 Bootstrap Protocol **48**
- RFC-951, Bootstrap Protocol **53**
- RFC-959, File Transfer Protocol. **47**
- RFCs 1611, DNS Server MIB Extensions **69**
- RFCs 2271-2275 **68**
- RFCS-2045 thru 2049 **46**
- Secsh-architecture-04.txt, SSH Protocol Architecture **161**
- Secsh-auth-kbdinteract-00.txt, Generic Message Exchange Authentication For SSH **161**
- Secsh-connect-06.txt, Connect, **161**
- Secsh-transport-06.txt, SSH Transport Layer Protocol **161**
- Secsh-userauth-06.txt, "SSH Authentication Protocol **161**
- Standard 10/RFC-821/RFC-1869/RFC-1870, Simple Mail Transfer Protocol (SMTP) Service Extensions **46**
- Standard 13/RFC-1034/RFC-1035, Domain Name System **47, 53**
- Standard 15/RFC-1157, Simple Network Management Procol **63**
- Standard 16/RFC-1155/RFC-1212, Structure of Management Information, May 1990 **63**
- Standard 17/RFC-1213, Management Information Base **63**
- Standard 3/RFC-1122/RFC-1123, Host Requirements, October 1989 **46**
- Standard 33/RFC-1350, The TFTP Protocol (Revision 2) **53**
- Standard 35/RFC 1006, ISO Transport Service on Top of the TCP **49**
- Standard 5, RFC-791/RFC-950/RFC-919/RFC-922/RFC-792/RFC-1112, Internet Protocol **54**
- Standard 5/RFC-791/RFC-950/RFC-919/RFC-922/RFC-792/RFC-1112, Internet Protocol, Seotember 1981 **49**
- Standard 50/RFC-1643, Definitions of Managed Objects for the Ethernet-like Interface Types **63**
- Standard 51/RFC-1661/RFC-1662, Point-to-Point Protocol (PPP) **55**
- Standard 54/RFC-2328, Open Shortest Path First Routing, Version 2 **54**
- Standard 6/RFC-768, User Datagram Protocol **49, 53**
- Standard 7/RFC-793, Transmission Control Protocol **53**
- Standard 7/RFC-793, Transmission Control Protocol (TCP) **49**
- Standard 8/RFC-854/RFC-855 **47**

- Standard 8/RFC-854/RFC-855, TELNET Protocol **47, 53**  
 Std 5, RFC-1112 **64**
- ISO/IEC
- 10536 Identification Cards - Contactless integrated circuit(s) card - Part 1, Physical characteristics **138**
  - 10536-4 Identification Cards - Contactless integrated circuit(s) card **139**
  - 10646-1 1993, Information Technology - Universal Multiple-Octet Coded Character Set (UCS) - Part 1 Architecture and Basic Multilingual Plane with Technical Corrigendum 1  
 1996 **35**
  - 10918-1, 1994, Joint Photographic Experts Group (JPEG) **27**
  - 11172-1, 1993 Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbit/s - Part 1, Systems, 1993, with Technical Corrigendum 1, 1995 **31**
  - 11172-1, 1993, Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbits/s - Part 1, Systems, 1993, with Technical Corrigendum 1, 1995 **30**
  - 11172-2, 1993 Information technology - Coding of moving pictures and associated audio for digital storage media at up to about 1.5 Mbit/s - Part 2 Video, 1993 **30**
  - 11172-3, 1993, Information technology - Encoding of moving pictures and associated audio for digital storage media at up to about 1.5 Megabits per second (Mbit/s) - Part 3 (Audio Layer-3 only), with Technical Corrigendum 1, 1996 **31, 32**
  - 13584, 1998, Industrial Automation Systems and Integration - Parts Library - Part 20, Logical Resource, Logical Model of Expressions, Part 42, Description Methodology, Methodology for Structuring Part Families **137**
  - 13818-1, 1996 Information Technology - Generic Coding of Moving Pictures and Associated Audio Information - Part 1, Systems (MPEG-2), 1996, with Amendment 1, 1997 **28**
  - 13818-1, 1996, Information Technology - Generic Coding of Moving Pictures and Associated Audio Information - Part 1, Systems (MPEG-2), 1996, with Amendment 1, 1997) **30**
  - 13818-2, 1996 - Generic Coding of Moving Pictures and Associated Audio Information - Part 2, Video (MPEG-2), 1996, with Amendment 1, 1997 and Amendment 2, 1997, (The identical text is also published as ITU-T Rec. H.262) **30**
  - 13818-2, 1996 Information Technology - Generic Coding of Moving Pictures and Associated Audio Information - Part 2, Video (MPEG-2), 1996, with Amendment 1, 1997 and Amendment 2, 1997 **28**
  - 13818-3, 1995, Generic coding of moving pictures and associated audio information, with Amendment 1, 1996. **32**
  - 13818-4, 1996 Information Technology - Generic Coding of Moving Pictures and Associated Audio Information - Part 4, Conformance testing, 1996 **28**
  - 14443 Identification Cards - Contactless integrated circuit(s) cards - Proximity integrated circuit(s) cards **139**
  - 14519 1999, POSIX Ada Language Interfaces - Part 1, Binding for System API - Realtime Extensions **34**
  - 14772-1 1998, Information Technology, Computer Graphics and Image Processing, The Virtual Reality Modeling Language, Part 1, Functional specification and UTF-8 encoding **39**
  - 15693 Identification Cards - Contactless integrated circuit(s) - Vicinity cards **139**
  - 646, 1991 IRV **25**
  - 7816 Identification Cards - Integrated circuit(s) card with contacts **138**
  - 7816 Identification Cards - Integrated Circuit(s) cards with contacts - Part 1, Physical characteristics **138**
  - 8632, 1992 Computer Graphics Metafile (CGM) for the Storage and Transfer of Picture Description Information ... 5 June 1998 **27**
  - 8802-3 **55**
  - 8802-3, 1996, Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications, 10BASE-T Medium-Access Unit (MAU) **55**
  - 9075, 1992 Information Technology - Database Language - SQL with admendment 1, 1996, as modified by FIPS PUB 127-2  
 1993, Database Language for Relational DBMSs. (Entry Level SQL) **23**
  - 9579 1999, Information technology, Remote Database Access for SQL **38**
  - 9594-8.2 **89**
  - 9595, 1998, Information Technology - Open Systems Interconnection Common Management Information Services (CMIS) **63**
  - 9596-1, 1998 Information Technology - Open Systems Interconnection - Common Management Information Protocol (CMIP) - Part 1  
 Specification **63**
  - 9596-2, 1993 Information Technology - Open Systems Interconnection - Common Management Information Protocol (CMIP), Protocol Implementation Conformance Statement (PICS) proforma **63**
  - 9945-1, POSIX - Part 1, System API, C language, 1996 **34**
  - 9945-1, Real-time extensions, Part 1 - POSIX System API, 1996 **34**
  - 9945-1, Thread Extensions, Part 1 - POSIX System API, 1996 **34**
  - 9945-2, POSIX - Part 2, Shell and Utilities, 1993 **34**

DIS 13249-3, Information technology, Database languages, SQL Multimedia and Application Packages, Part 3, Spatial **38**

DIS 9075-1, Information technology, Database languages, SQL, Part 1, Framework (SQL/Framework) **37**

DIS 9075-10, Information technology, Database languages, SQL, Part 10, Object Language Bindings (SQL/OLB) **37**

DIS 9075-2, Information technology, Database languages, SQL, Part 2, Foundation (SQL/Foundation) **37**

DIS 9075-3, Information technology, Database languages, SQL, part 3, Call-Level Interface (for SQL3) **37**

DIS 9075-4, Information technology, Database languages, SQL, Part 4, Persistent Stored Modules (SQL/PSM) **37**

DIS 9075-5, Information Technology, Database languages, SQL, Part 5, Host Language Bindings (SQL/Bindings) **37**

JTC1/SC27/WG3 N304 **91**

ITU Telecommunications Sector (ITU-T) M.3211.1, TMN management service

Fault and performance management of the ISDN access **63**

## J

J-STD

008 **67**

## L

Lindholm and Yellin

The Java Virtual Machine Specification, Addison-Wesley 1997, ISBN 0-201-63452-X **42**

## M

Microsoft Press

Win32 APIs, Window Management and Graphics Device Interface, Volume 1 Microsoft Win32 Programmers Reference Manual, 1993 or later **23, 35**

Windows Interface Guidelines for Software Design **82**

MIL-PRF

28000A, with Amendment 1, Digital Representation for Communications of Product Data - IGES Application Subsets and IGES Application Protocols **135**

28000B, Digital Representation for Communication of Product Data

IGES Application Subsets and IGES Application Protocols (Draft) **137**

28001C, Markup Requirements and Generic Style Specification for Electronic Printed Output and Exchange of Text (CAS SGML) **134**

28002C, Performance Specification, Requirements for Raster Graphics Representation in Binary Format **135**

28003A, Performance Specification, Digital Representation for Communications of Illustration Data CGM Application Profile **135**

89045, DoD Performance Specification Geospatial Symbols for Digital Displays (GeoSym) **83**

MIL-STD

1477B **197**

1553 Department of Defense Interface Standard for Digital Time Division Command/Response Multiplex Data Bus **108**

1553B, Interface Standard for Digital Time Division Command/Response Multiplex Data Bus **202**

1553B, Standard for Medium Speed System Network Bus **191**

1582D, EHF LDR Uplinks and Downlinks, 30 September 1996 **60**

1787B (USAF), Aircraft Display Symbolology **186**

1821, Standard Simulator Database 9SSDB) Interchange Format (SIF) Design Standard **173**

1840C, Automated Interchange of Technical Information (AITI) **134**

1840C, Automated Interchange of Technical Information, 26 June 1997 **135**

188-110A, Data Modems, Interoperability and Performance Standards **61**

188-136A, EHF MDR Uplinks and Downlinks, 8 June 1998 **60**

188-140A, Equipement Technical Design Standards for Common Long Haul/Tactical Radio Communications **61**

188-141B, Interoperability and Performance Standards for Medium and High Frequency Radio Systems **61**

188-145, Digital Line-of-Sight (LOS) Microwave Radio Equipment **62**

188-148A, Interoperability Standard for Anti-Jam Communications in the HF Band (2-30 Mhz) **61**

188-161D, Interoperability and Performance Standards for Digital Facsimile Equipment **52**

188-164, Interoperability and Performance Standards for C-Band, X-Band, and Ku-Band SHF Satellite Communications Earth Terminals **60**

188-165, Interoperability and Performance Standards for SHF Satellite Communications PSK Modems (Frequency Division Multiple Access (FDMA) Operations) **60**

188-166 Interface Standard, Interoperability and Performance Standard for SHF SATCOM Link Control **68**

188-167 Interface Standard, Message Format for SHF SATCOM Link Control **68**

188-168 Interface Standard, Interoperability and Performance Standards for SHF Satellite Communications Multiplexers and Demultiplexers **68**

188-181B, Interoperability Standard for Single Access 5-Khz and 25-Khz UHF Satellite Communications Channels **59**

188-182A, Interoperability Standard for 5-Khz UHF DAMA Terminal Waveform **59**

188-183A, Interoperability Standard for 25-Khz TDMA/DAMA Terminal Waveform **59**

188-184, Interoperability and Performance Standard for the Data Control Waveform **59**

188-185, DoD Interface Standard, Interoperability of UHF MILSATCOM DAMA Control System **60**

188-196, Bi-Level Image Compression for the National Imagery Transmission Format Standard, 18 June 1993 with Notice 1, 27 June 1996 **27**

188-199, Vector Quantization Decompression for the National Imagery Transmission Format Standard, 27 June 1994 with Notice 1, 27 June 1996 **27**

188-220B **55**

188-241, RF Interface Requirements for VHF Frequency Hopping Tactical Radio Systems **68**

188-242, Tactical Single Channel (VHF) Radio Equipment **61**

188-243, Tactical Single Channel (UHF) Radio Communications **61**

2045-43001, Department of Defense Interface Standard  
Network Security Protocol for Resource-Constrained Environments **66**

2045-44000, Department of Defense Interface Standard  
Transport Protocol for High-Stress, Resource-Constrained Environments **66**

2045-44500, National Imagery Transmission Format Standard (NITFS) Tactical Communications Protocol 2 (TACO2) **52**

2045-47000, Department of Defense Interface Standard  
File and Record Transfer Protocol for Resource-Constrained Environments **66**

2045-47001B, Connectionless Data Transfer Application Layer Standard **48**

2045-48501, Common Security Label **88, 89**

2401, Department of Defense World Geodetic System (WGS84), 11 January 1994 **26**

2407, Interface Standard for Vector Product Format (VPF), 28 June 1996 **26**

2411, Raster Product Format **26**

2500B, National Imagery Transmission Format (Version 2.1) for NITFS Notice 1 **27**

2525B, Common Warfighting Symbolology **83, 197**

2549, Department of Defense Interface Standard, Configuration Management Data Interface **136**

6016A Tactical Information Link (TADIL) J Message Standard **196**

6016A, Tactical Digital Information Link (TADIL) J Message Standard **76**

6040, United States Message Text Format (USMTF) **76**

973 **136**

## N

National Security Agency (NSA)  
FORTEZZA Application, Implementers' Guide MD4002101-1.52 **86**

FORTEZZA Cryptologic, Interface Programmers Guide, MD4000501-1.52b **86**

FORTEZZA Document Control, Revision P1.5 **88**

NCC  
DIRECT ICD, Human-Machine Interface (HMI) Design Criteria, CDRL 135C-03, V3.0 **120**

EAP CJCS Volume VII "EAM Dissemination and Force Report Back (U) **120**

Emergency Action Procedures (EAP) Chairman Joint Chiefs of Staff (CJCS), Volume V, "CJCS Control Orders" **120**

NCPDP  
Telecommunication Standard, Version 3.2 **165**

NCSC  
TG-005, Version 1, Trusted Network Interpretation **89**

TG-017 - A Guide to Understanding Identification and Authentication in Trusted Systems **87**

TG-021, Version 1, Trusted Database Management System Interpretation **86**

TG-021, Version 1, Trusted Database Management System Interpretation. **87**

Netscape  
Secure Sockets Layer Protocol, Version 3.0, 18 November 1996 **90**

NITF  
STDI0002, Airborne Support Data Extension (ASDE), Version 1.0 **104**

STDI0002, HISTOA Extension **104**

STDI0002, National Imagery Transmission Format Profile for Image Access Extensions (PIAE), Version 3.0 **104**

NTSDS  
Database Implementation Description & Core Schema Definition **106**

Supplemental Schema Definition, Version 1.1 **106**

## O

OASD/C3I  
System Description Document for CDL, Specification 7681996 **105**

System Specification for the CDL Segment, Specification 7681990, Revision D **105**

Object Database Management Group (ODMG)

The Object Database Standard, ODMG 2.0, edited by R.G.G. Cattell et al. The Morgan Kaufmann Series in Data Management, 1997, ISBN 1-55860-463-4 **38**

#### Object Management Group (OMG)

document ad/97-08-14, Meta Object Facility (MOF) **42**

document bom/99-03-01, Workflow Management Facility, 9 March 1999 **42**

document ec/98-02-04, Negotiation Facility **42**

document formal/97-12-10, CORBAServices Naming Service Specification, March 1995 **36**

document formal/97-12-11, CORBAServices Event Service Specification, March 1995 **37**

document formal/97-12-17, CORBAServices Transaction Service Specification, November 1997 **37**

document formal/97-12-21, CORBAServices Time Service Specification, July 1997 **37**

document formal/97-12-23, CORBAServices Trading Object Service Specification, March 1997 **37**

document formal/98-12-01, Common Object Request Broker, Architecture and Specification, Version 2.3, June 1999 **36**

document formal/98-12-10, CORBA Security Service 1.2, December 1998 **93**

document mfg/98-06-06, Distributed Simulation Service **42**

document orbos/97-09-06, COM/CORBA Part B, Interworking, November 19, 1997 **37**

document orbos/97-09-07, COM/CORBA Part A Revision November 19, 1997 **37**

document orbos/98-03-04, CORBAServices Interoperable Name Service **42**

document orbos/98-05-04, CORBAServices CORBA/Firewall Security **42**

document orbos/98-05-10, Persistent State Service 2.0 **42**

document orbos/98-06-01, CORBAServices DCE/CORBA Interworking Service **37**

document orbos/99-02-12, Joint Revised Realtime CORBA submission **42**

document orbos/99-03-29, Errata for the Realtime CORBA joint/revised submission orbos/99-02-12 **42**

OMG Facility for Distributed Simulation Systems **172**  
Unified Modeling Language (UML) Specification, Version 1.3, June 1999 **77**

#### Open Group

C310, DCE 1.1, Time Services Specification, X/Open CAE Specification, November 1994 **36**

C311, DCE 1.1, Authentication and Security Services, CAE Specification, August 1997 **36**

C311, DCE Authentication and Security Specification, August 1997 **93**

C705, DCE 1.1, Directory Services, CAE Specification, August 1997 **36**

C706, DCE 1.1, Remote Procedure Call, CAE Specification, August 1997 **36**

C706, DCE 1.1, Remote Procedure Call, CAE Specification, August 1997 **36**

CDE 2.1/Motif 2.1 M029, Style Guide Reference, ISBN 1-85912-114-4 **23**

M021, CDE 2.1/Motif 2.1 User's Guide, ISBN 1-85912-173-X, October 1997 **23**

M027, CDE 2.1/Motif 2.1 Style Guide and Glossary, ISBN 1-85912-104-7 **23**

M028, CDE 2.1/Motif 2.1 Style Guide Certification Check List, ISBN 1-85912-109-8 **23**

M213, Motif 2.1 Programmer's Guide, ISBN 1-85912-134-9 **23**

M214A, Motif 2.1 Programmer's Reference, Volume 1, ISBN 1-85912-119-5 **23**

M214B, Motif 2.1 Programmer's Reference, Volume 2, ISBN 1-85912-124-1 **23**

M214C, Motif 2.1 Programmer's Reference, Volume 3, ISBN 1-85912-164-0 **23**

M216, Motif 2.1 Widget Writer's Guide, ISBN 1-85912-129-2 **23**

OSF-DCE Version 1.2.2 **42**

Window Management (X11R5), File Formats & Application Conventions, X/Open CAE Specification, April 1995 **23**

Window Management (X11R5), X Toolkit Intrinsics, X/Open CAE Specification, April 1995 **22**

Window Management (X11R5), Xlib - C Language Binding, X/Open CAE Specification, April 1995 **22**

Window Management (X11R5), X-Window System Protocol, X/Open CAE Specification, April 1995 **22, 233**

#### Open Software Foundation (OSF)

M027, CDE 2.1/Motif 2.1 - Style Guide and Glossary **81**

M028, CDE 2.1/Motif 2.1 - Style Guide Certification Check List **81**

M029, CDE 2.1/Motif 2.1 - Style Guide Reference, ISBN 1-85912-114-4, October 1997 **81**

M029, CDE 2.1/Motif 2.1 Style Guide Reference, ISBN 1-85912-114-4, October 1997 **81**

#### OpenGL

A Specification (Version 1.1) 25 June 1996 (for three-dimensional graphics) **33**

## P

#### PMNV/RSTA

ICD-SLP-200, Interface Control Document (ICD) Title- Sensor Link Protocol. **106**

#### POSIX

Part xx

Protocol Independent Interfaces **41**

## R

### R21-TECH

23-94, Key Exchange Algorithm (KEA) **88**

### RSA

Laboratories Public Key Cryptography Standard #12, Personal Information Exchange Syntax Standard. **96**

Laboratories Public Key Cryptography Standard (PKCS) #1, RSA Cryptography Standard **96**

Laboratories Public Key Cryptography Standard (PKCS) #11, Cryptographic Token Interface Standard **96**

## S

### SAE

J 1850, Class B Data Communication Network Interface **191**

### SDN

301, Revision 1.5, Secure Data Network System (SDNS) Security Protocol 3 (SP3) **89**

903, revision 3.2, Secure Data Network System (SDNS) Key Management Protocol (KMP) **89**

### SEIWG

Interface Specification, Radio Frequency Transmission Interfaces for DoD Physical Security Systems, SEIWG-005 **106**

### SMPTE

170M, Composite Analog Video Signal - NTSC for Studio Applications **210**

170M, Television - Composite Analog Video Signal - NTSC for Studio Applications **191**

### STANAG

4175, Edition 1, Technical Characteristics of the Multifunctional Information Distribution System (MIDS) **62**

4193, Part 1, Edition 2, 12 November 1990, with Amendment 1- NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders **183**

4193, Part 2, Edition 1, 12 November 1990 (SECRET), NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders **183**

4193, Part 3, Edition 1, 12 November 1990, with Amendment 1, 31 January 1995, NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders **183**

4193, Part 4, 28 November 1997, NATO Standard Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders **183**

4193, Part 5, Annex A through D, 4 September 1998 (SECRET NATO RESTRICTED) **184**

4193, Part 5, Annex A through D, 4 September 1998 (SECRET NATO RESTRICTED) NATO Standard

Agreement Technical Characteristics of IFF Mk XA and Mk XII Interrogators and Transponders **184**

4246, Edition 2, HAVE QUICK UHF Secure and Jam-Resistant Communications Equipment **61**

5516, Edition 1, Tactical Data Exchange - Link 16 **76**

5522, Edition 1, Tactical Data Exchange - LINK 22 (Undated) **77**

## T

### Telcordia (formerly Bellcore)

SR-3875, National ISDN 2000, May 1999 **56**

SR-4619, 1999 Version of National ISDN Primary Rate Interface Customer Premise Equipment Generic Guidelines **57**

SR-4620, 1999 Version of National ISDN Basic Rate Interface Customer Premise Equipment Generic Guidelines, December 1998 **56**

### Telemetry Group

Range Commanders Council, Telemetry Standards, IRIG 106-96 **108**

### TIA/EIA

41-D **67**

465-A, Group 3 Facsimile Apparatus for Document Transmission **52**

466-A, Procedures for Document Facsimile Transmission **52**

95-B **67**

### transmission media

Link 22 **68**

## U

### U.S. Army

Weapon Systems Human-Computer Interface Style Guide, Version 2.0, 31 December 1997 **181**

### US Navy

NAVELEX 28687-0119-404, MEECN Message Processing Mode Standard **119**

### USAF

SNU-84-1, Revision D Specification for USAF Standard Form, Fit, and Function (F3) Medium Accuracy Inertial Navigation Unit (INS) **108**

## V

### Variable Message Format (VMF)

Technical Interface Design Plan (Test Edition) Reissue 3 **76**

### VXI plug&play

Systems Alliance Instrument Driver Functional Body Specification **148**

Systems Alliance VPP-3.1

Instrument Drivers Architecture and Design Specification Revision 4.1 **149**

Systems Alliance VPP-3.2

Instrument Driver Functional Body Specification



- Revision 5.0 **149**
- Systems Alliance VPP-3.3
  - Instrument Driver Interactive Developer Interface Specification Revision 3.0 **149**
- Systems Alliance VPP-3.4
  - Instrument Driver Programmatic Developer Interface Specification Revision 2.2 **149**

## W

- Weapon Systems Technical Architecture Work Group (WSTAWG)
  - Operating Environment (OE) Application Programmer's Interface (API), Volume I, OE Application Interface **190**
- World Meteorological Organization (WMO)
  - FM 92-X Ext. GRIB WMO No. 306, Manual on Codes, International Codes, Volume 1.2 (Annex II to WMO Technical Regulations) Parts B and C **33**
  - FM 94-X Ext. BUFR WMO No. 306, Manual on Codes, International Codes, Volume 1.2 (Annex II to WMO Technical Regulations) Parts B and C **33**
- World Wide Web Consortium (W3C)
  - PNG (Portable Network Graphics) Specification, W3C Recommendation, REC-png.html **25**
  - Resource Description Framework (RDF) Model and Syntax Specification, REC-rdf-syntax-19990222 **38**
  - Resource Description Framework (RDF) Schema Specification, PR-rdf-schema-19990303 **39**
  - XHTML 1.0, The Extensible HyperText Markup Language, A Reformulation of HTML 4.0 in XML 1.0, W3C Working Draft 5th May 1999 **38**

Page intentionally left blank

# Subject Index

## A

Activity Models **71**  
Aggregate-Level Simulation Protocol (ALSP) **170**  
Airborne Support Data Extension (ASDE) **104**  
Allied Communication Protocol (ACP) **46**  
American College of Radiology (ACR) **165**  
American National Standards Institute **335**  
American Society for Testing and Materials (ASTM) **167**  
Application Development Environment (ADE) **157**  
Application Program Interface (API) **91, 190**  
Architecture Coordination Council (ACC) **ii, 12**  
Asynchronous-Transfer Mode (ATM) **57**  
ATM-Related Standards **66**  
ATS Management Board (AMB) **148**  
Authentication Header (AH) **97**  
Automated Information System (AIS) **168**  
Automated Test Equipment (ATE) **142**  
Automatic Link Establishment (ALE) **61**  
Automatic Test Systems (ATS) **141**

## B

Ballistic Missile Defense Organization (BMDO) **196**  
Battle Management Command, Control, and Communications (BMC3) **194**  
Bit Error Rate (BER) **52**  
Bootstrap Protocol (BOOTP) **48**  
Built-in Test Data **153**

## C

C4I Architecture Framework (CAF) **6**  
Call Level Interface (CLI) **23**  
Carrier Sense Multiple Access with Collision Detection (CSMA/CD) **54**  
Certificate Management Messages over Cryptographic Message Syntax (CMC) **96**  
Certificate Revocation Lists (CRLs) **95**  
Certification Authority **94**  
Cipher Block Chaining (CBC) **98**  
Civil Aviation Authorities (CAAs) **187**  
Code Division Multiple Access (CDMA) **67**  
Combat Net Radio **49**  
Command and Control Core Data Model (C2CDM) **337**  
Commercial Off-The-Shelf (COTS) **i**  
Commercial-Off-The-Self (COTS) **21, 80**  
Common Data Link (CDL) **105**  
Common Desktop Environment (CDE) **22**  
Common High Bandwidth Data Link Surface Terminal (CHBDL-ST) **105**  
Common Internet Protocol Security Options (CIPSO) **93**  
Common Object Request Broker Architecture (CORBA) **93, 179, 335**  
Common Operating Environment (COE) **18**  
Common Security Protocol (CSP) **89**  
Communications, Navigation, and Surveillance (CNS)

**187**

Computer Graphics Metafile (CGM) **134**  
Computer to External Environments (CXE) **155**  
Computer-Aided Design (CAD) **135**  
Computer-Aided Manufacturing (CAM) **135**  
Conceptual models of the mission space (CMMS) **169**  
Connectionless Data Transfer Application Layer Standard **48**  
Continuous Acquisition and Life-Cycle Support (CALS) **134**  
Coordinated Universal Time **195**

## D

Data Element Definitions (DEDs) **196**  
Data Encryption Standard (DES) **98**  
Data Models **71**  
Database Management System (DBMS) **23**  
Defense Communications Agency **337**  
Defense Data Dictionary System (DDDS) **71, 74, 337**  
Defense Information System Network (DISN) **19, 45**  
Defense Information Systems Agency (DISA) **337**  
Defense Message System (DMS) **46**  
Defense Standardization Program (DSP) **343**  
Defense Standards Improvement Council (DSIC) **343**  
Digital Test Data Formats (DTFs) **149**  
Directory Access Protocol (DAP) **47**  
Distributed Interactive Simulation (DIS) **170**  
DoD Data Model (DDM) **73**  
DoD Defense Data Model (DDM) **337**  
DoD Information Technology Security Certification and Accreditation Process (DITSCAP) **85**  
Domain Name System (DNS) **47, 98**  
Domain of Interpretation (DOI) **99**  
Dynamic Host Configuration Protocol (DHCP) **48**

## E

EDI Standards Management Committee (EDISMC) **136, 337**  
Electronic Business/Electronic Commerce (EB/EC) **138**  
Electronic Commerce Acquisition Program Management Office (ECAPMO) **338**  
Electronic Data Interchange (EDI) **136, 164**  
Electronics Industries Association **335**  
Encapsulating Security Payload (ESP) **97–98**  
eXtensible Markup Language (XML) **24, 134**  
Extremely High Frequency (EHF) **60**

## F

Federal EDI Standards Management Coordinating Committee (FESMCC) **136**  
Federal Electronic Data Interchange (EDI) Standards Management Coordinating Committee (FESMCC) **338**  
Federation Execution Details (FED) **173**  
Federation Object Model (FOM) **172**

File Handling Protocol (FP) **66**  
 Frequency Division Multiple Access (FDMA) **60**  
 Functional Working Groups (FWGs) **136**  
 Future Public Land Mobile Telecommunications Systems (FPLMTS) **68**

## G

Generic Open Architecture (GOA) **177**  
 Generic Security Service (GSS) **91**  
 Generic Security Service-Application Program Interface (GSS-API) **91**  
 Global Engineering Documents **335**  
 Global Positioning System (GPS) **45, 196**  
 Global System for Mobile Communications (GSM) **67**  
 Government off-the-shelf (GOTS) **21, 80**  
 Ground Vehicle (GV) **189**

## H

Hardware Interfaces  
     Computer Asset Controller Interface (CAC) **144**  
     Computer to External Environments (CXE) **145**  
     Host Computer Interface (HST) **145**  
     Receiver/Fixture Interface (RFX) **145**  
     Switching Matrix Interface (SWM) **145**  
 Health Insurance Portability and Accountability Act (HIPAA) **166**  
 Health Level Seven (HL7) **164**  
 High Frequency (HF) **61**  
 High-Level Architecture (HLA) **169**  
 History Tag, Version A (HISTOA) **104**  
 Human-Computer Interfaces (HCI) **180**  
 Hypertext Markup Language (HTML) **24, 134**  
 Hypertext Transfer Protocol (HTTP) **48**

## I

Imagery Chip **103**  
 Independent Data Unit Protection Generic Security Service Application Program Interface (IDUP-GSS-API) **92**  
 Industry Standard Architecture (ISA) **157**  
 Information Technology (IT) **101**  
 Initial Graphics Exchange Specification (IGES) **135**  
 Institute of Electrical and Electronics Engineers **335**  
 Instrument Command Language **157**  
 Integrated Product Team (IPT) **141, 196**  
 Integration and Runtime Specification (I&RTS) **18**  
 Intelligence Systems Board (ISB) **106**  
 Intelligence, Surveillance, and Reconnaissance (ISR) **31**  
 Interface Change Proposals (ICPs) **76, 196**  
 Intermediate Frequency (IF) **60**  
 International Civil Aviation Organization (ICAO) **187**  
 International Organization for Standardization (ISO) **336**  
 International Telecommunications Union - Telecommunications Standardization Sector (ITU-T)

**94, 336**

International Telegraph and Telephone Consultative Committee **335**  
 Internet Architecture Board (IAB) **335**  
 Internet Control Message Protocol (ICMP) **49**  
 Internet Engineering Task Force (IETF) **46, 91, 335**  
 Internet Group Management Protocol (IGMP) **49**  
 Internet Protocol (IP) **46**  
 Internet Security Association and Key Management Protocol (ISAKMP) **98**

## J

Japanese Industry Association for Radiation Apparatus (JIRA) **165**  
 Java Database Connectivity (JDBC) **23**  
 Joint Information Engineering Organization (JIEO) **77**  
 Joint Photographic Expert Group (JPEG) **25**  
 Joint Tactical Data Link Management Plan (JTDLMP) **76**  
 Joint Tactical Information Distribution System (JTIDS) **62**  
 Joint Technical Architecture (JTA) **i**  
     address for Web home page **12**  
 Joint Technical Architecture Development Group (JTADG) **12**  
 Joint Technical Architecture Working Group (JTAWG) **4**  
 Joint Variable Message Format **76**  
 Joint Vision 2010 (JV 2010) **i, 3**  
 JTA Development Group (JTADG) **ii**

## L

Lightweight Directory Access Protocol (LDAP) **47**  
 Lightweight Directory Access Protocol 3 (LDAPv3) **64**  
 Local Area Network (LAN) **93**  
 Local Registration Authorities (LRAs) **96**  
 Low Data Rate (LDR) **60**  
 Low Frequency (LF)/Ver Low Frequency (VLF) **61**

## M

Management Information Bases (MIBs) **62**  
 Measurement and Signature Intelligence (MASINT) **105**  
 Medium Data Rate **60**  
 Message Security Protocol (MSP) **46, 93**  
 Metropolitan Area Networks (MANs) **93**  
 Military Health Services System (MHSS) **163, 168**  
 Military Health System (MHS) **163**  
 Military Satellite Communications (MILSATCOM) **59**  
 Miniature Interoperable Surface Terminal (MIST) **105**  
 missile defense  
     references for background information **193**  
 Mobile Host Protocol (MHP) **65**  
 Multi-Functional Information Distribution System (MIDS) **62**  
 Multilevel Information Systems Security Initiative (MISSI) **338**

**N**

National Aeronautics and Space Administration (NASA) **65**  
 National Electrical Manufacturers Association (NEMA) **165**  
 National Imagery Transmission Format Standard (NITFS) **52, 103**  
 National Institute of Standards and Technology (NIST) **339**  
 National Missile Defense (NMD) **194**  
 National Security Agency (NSA) **65**  
 National Target/Threat Signature Data System (NTSDS) **106**  
 National Technical Information Service (NTIS) **338**  
 National Technical Means (NTM) **103**  
 Network and Systems Management (NSM) **62**  
 Network Protocol (NP) **66**  
 Network Time Protocol (NTP) **47**  
 North American ISDN User's Forum (NIUF) **56**

**O**

Object Linking and Embedding (OLE) **25**  
 Object Management Group (OMG) **90, 336**  
 Object Model Template **173**  
 Office of the Assistant Secretary of Defense for C3I (OASD/C3I) **105**  
 Office of the Joint Chiefs of Staff (OJCS) **ii**  
 Open Database Connectivity (ODBC) **23**  
 Open Software Foundation (OSF) **22**  
 Open Systems Environment (OSE) **177**  
 Open Systems Foundation (OSF) **336**  
 Open-Systems Interconnection (OSI) **49, 66**  
 Open-Systems Joint Task Force (OSJTF) **177, 186**  
 Operations-Other-Than-War **67**

**P**

Peripheral Component Interface (PCI) **157**  
 Personal Communications Services (PCS) **67**  
 Phase-Shift Keying (PSK) **60**  
 Point-to-Point Standards **68**  
 Portable Operating System Interface (POSIX) **22, 186**  
 Primary Rate Interface (PRI) **56**  
 Private Network-Network Interface (PNNI) **57**  
 Profile for Imagery Access Extensions (PIAE) **103**  
 Program Management Office for Night Vision/Reconnaissance and Target Acquisition (PM NV/RSTA) **106**  
 Protocol Information Conformance Statement (PICS) **67**  
 Public Key Infrastructure (PKI) **94**

**Q**

Quality of Service (QoS) **65**

**R**

Radio Frequency (RF) **60, 143**  
 Registration Authorities (RAs) **96**  
 Registration, Admitting, Discharge, and Transfer (R-ADT) **168**  
 Relational Database Management System (RDBMS) **23**  
 Remote Authentication Dial In User Service (RADIUS) **92**  
 Requests for Proposals (RFPs) **45**  
 Research and Development (R&D) **141**  
 Resource Reservation Protocol (RSVP) **65**  
 RTS **155**  
 Runtime Infrastructure (RTI) **173**  
 Runtime Interfaces  
   Adapter Function and Parametric Data (AFP) **147**  
   Application Development Environment (ADE) **147**  
   Instrument Function and Parametric Data (IFP) **147**  
   Switch Function and Parametric Data (SFP) **147**  
   Test Program Documentation (TPD) **147**  
   UUT Test Requirements (UTR) **147**

**S**

Satellite Communications (SATCOM) **59**  
 Secure Intelligence Data Repository (SIDR) **72, 74**  
 Secure Sockets Layer (SSL) **90**  
 Secure/Multipurpose Internet Mail Extensions (S/MIME) **93**  
 Security Protocol (SP) **66**  
 Sensitive but Unclassified (SBU) **94**  
 SHF Satellite Terminal Standards **68**  
 Simple Mail Transfer Protocol **46**  
 Simple Network Management Protocol (SNMP) **63**  
 Simple Network Management Protocol Version 3 **68**  
 Smart Card **138**  
 Society of Automotive Engineers **336**  
 Software Interfaces  
   Diagnostic Processing (DIA) **145**  
   Framework (FRM) **145**  
   Instrument Command Language (ICL) **145**  
   Instrument Communication Manager (ICM) **145**  
   Instrument Driver API (DRV) **145**  
   Multimedia Formats (MMF) **146**  
   Network Protocol (NET) **146**  
   Resource Adapter Interface (RAI) **146**  
   Runtime Services (RTS) **146**  
   Test Program to Operating System (TOS) **146**  
 Space Communication Protocol Standards **65**  
 Space Communication Protocol Standards (SCPS) **65**  
 Space Reconnaissance **123**  
 Space-based Infrared System (SBIRS) **194**  
 Standard Generalized Markup Language (SGML) **24, 134**  
 Standards Profile for Imagery Access (SPIA) **103**  
 Statements of Objective (SOO) **6**  
 Statements of Work (SOW) **6**

Statements of Work (SOWs) **45**  
 Structured Query Language (SQL) **23**  
 Super High Frequency **62**  
 Support Data Extensions (SDEs) **103**  
 Synchronous Optical Network (SONET) **45**  
 Synthetic Environment Data Representation and  
 Interchange Specification (SEDRIS) **173**

## T

Tactical Communications Protocol 2 (TACO2) **52**  
 Tactical Digital Information Link (TADIL) **196**  
 Technical Architecture Framework for Information  
 Management (TAFIM) **i, 339**  
 Technical Architecture Steering Group (TASG) **12**  
 Technical Interface Design Plans (TIDPs) **339**  
 Technical Interface Specifications (TISs) **52**  
 Technical Reference Model (TRM) **i**  
 Telecommunications Industry Association (TIA) **336**  
 Telecommunications Management Network (TMN) **63**  
 Telecommunications Network (TELNET) **47**  
 Test Program Sets (TPSs) **141–142**  
 The Information Technology Standards Guidance (ITSG)  
**338**  
 The Tactical Communications Protocol 2 **52**  
 The United States Imagery and Geospatial Information  
 Service (USIGS) **339**  
 Theater Air Missile Defense (TAMD) **196**  
 Theater Missile Defense (TMD) **194**  
 Time and Geospatial Working Group (TGWG) **196**  
 Time Division Multiple Access (TDMA) **67**  
 Transmission Control Protocol (TCP) **47, 49**  
 Transmission Media **59**  
 Transport Layer Security (TLS) **91**  
 Transport Protocol (TP) **66**  
 Transport Protocol Class 0 **49**  
 Trusted Computer System Evaluation Criteria (TCSEC)  
**90**  
 Trusted Information for Exchange for Restricted  
 Environments (TSIX (RE) **93**  
 Trusted Systems Interoperability Group (TSIG) **93**

## U

U.S. Army Technical Architecture (ATA) **4**  
 U.S. Naval Observatory (USNO) **195**  
 Ultra High Frequency (UHF) **61**  
 Under Secretary of Defense for Acquisition and  
 Technology (USD/A&T) **171**  
 United States Cryptologic System (USCS) **111**  
 United States Message Text Format (USMTF) **76**  
 Units Under Test (UUT) **142**  
 Universal Product Number (UPN) **165**  
 User Datagram Protocol (UDP) **47, 49**  
 User-Network Interface (UNI) **57**

## V

Variable Message Format (VMF) **48, 76, 196**  
 Very High Frequency (VHF) **61**  
 Very Low Frequency (VLF) **61**  
 Video Teleconferencing **45, 50**  
 VME Extensions for Instrumentation **157**

## W

Weapon Systems Human-Computer Interface (WSHCI)  
**181**  
 Weapon Systems Technical Architecture Working Group  
 (WSTAWG) **185, 189**  
 Wireless LAN **66**  
 World Geodetic System (WGS) **195**  
 World Meteorological Organization (WMO) **336**  
 World Wide Web **229**